



Job Site Charger Radio
DMR300 12Vmax-18V / AC



Battery charging function





Battery charging function

- Able to charge LXT/CXT batteries when powered by AC with AC adaptor
- Clear sound quality can be enjoyed even during battery charging.

Charging time: min

12Vmax			18V				
BL1016 (1.5Ah) 197393-5	BL1021B (2.0Ah) 197396-9	BL1041B (4.0Ah) 197406-2	BL1815N (1.5Ah) 196449-1	BL1820B (2.0Ah) 197254-9	BL1830B (3.0Ah) 197599-5	BL1850B (5.0Ah) 197280-8	BL1860B (6.0Ah) 197422-4
31	40	75	27	38	48	84	100



Charging status indication

- LCD screen indicates battery charging status; Charging, Charging completed, Standing-by for charging, harging error.
- It also indicates that the battery has reached 80% charge.



Indicator for battery capacity	Charging status
(blinking)	Charging (less than 80%)
(blinking)	Charging (80% or more has been charged)
(lights up)	Charged (100%)

Dust and shower-proof construction: IP64




For use in outdoor applications or harsh environments



equipped with Bluetooth class 2** to wirelessly play music from a mobile device.

**With a range of 10m (33ft); up to 30m(100ft) in good radio conditions

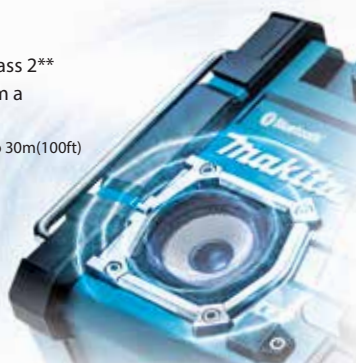

Dual power sources

Runs on AC adapter or Makita rechargeable Li-ion batteries.



The weight may differ depending on the attachment(s), including the battery cartridge.
Items of standard equipment and specifications may vary by country or area.

Makita Singapore Pte Ltd

7, Changi South Street 3, Singapore 486348
Phone : +65-6546-8700 Fax : +65-6546-8711
Email : msgproductteam@makita.com.sg
Website : www.makita.com.sg
Facebook : www.facebook.com/MakitaSG



VISIT OUR WEBSITE



AUX-IN jack



used as a stereo speaker by connecting to external audio source with a commercial connecting cable.

USB output port



- allows for charging a mobile device.
- Type A USB socket for DC5V/ 2.4A USB output

Bottle opener



Continuous run time (approx): hour

On a single full battery charge

BL1016 (1.5Ah) 6.3	BL1815N(1.5Ah) 6.1	BL1850B(5.0Ah) 20.5
12V max BL1021B(2.0Ah) 8.2	18V BL1820B(2.0Ah) 8.2	BL1860B(6.0Ah) 24.7
BL1041B(4.0Ah) 16.4	BL1830B(3.0Ah) 11.3	

Job Site Charger Radio

DMR300 12Vmax-18V / AC

Frequency Band	FM / AM: 87.5 - 108 MHz / 522 - 1,710 kHz
Speaker Size	Woofer: Ø89 mm x2
Bluetooth	Version: 5.0 Profile: A2DP / SCMS-T Supported Code: SBC Max Transmission Range (Optimum): 10 m (33 ft) Max Transmission Range (Possible): 30 m (98 ft) Transmission Power Class: 2
Dimensions (L x W x H)	w/ Handle in Retracted Position: 268x185x305 mm (10-1/2"x7-1/4"x12") w/ Handle in Upright Position: 268x185x427 mm (10-1/2"x7-1/4"x16-3/4")
Net weight	5.9 - 6.6 kg (13.0 - 14.6 lbs.)

Standard Equipment : AC Adaptor, AA Battery