



Cordless Hedge Trimmer UH020G 500mm (19-3/4")



40V Li-ion max



Lightweight and compact enough to handle easily,
yet capable of high power trimming



Run time*
UH020G

110 min

Battery: BL4040

Strokes per minute

4,200 min⁻¹

Net weight
UH020G

3.0 kg

Battery: BL4020



*Continuous run time (approx) on a single full battery charge (under no-load)

High efficiency, High durability, High power

Smooth and efficient trimming

- The output power and number of strokes have been increased compared with our 18V models, achieving smooth and efficient trimming.
- Constant speed control suppresses rotation drop to enable stable trimming.



Blade type

Single-sided blade with obliquely-angled and triple-ground teeth



With excellent branch introduction and a design that prevents branches from escaping, the blades smoothly capture branches, allowing for trimming without letting branches escape.

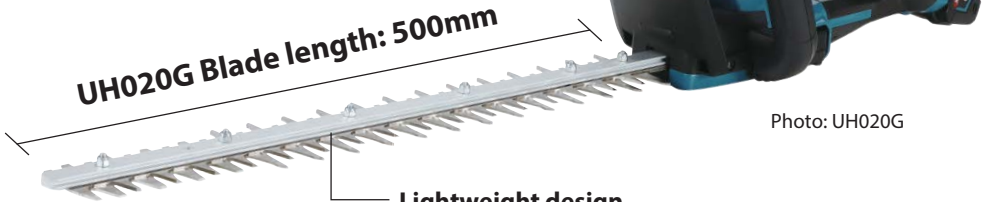


Photo: UH020G

Lightweight design

The guide bar is made of aluminum to make the front of the tool lighter for reducing user fatigue.

Highly durable crank mechanism

Increased crank wall thickness can:


- reduce the chance of falling off of the blade from the crank.
- increase the contact area the blade, reducing wear of the crank.




Chip receiver (option)

smoothly takes in branches and leaves

- Smooth shape for excellent collection
- Leaves and branches are less likely to fall and slip




Less likely to fall



Less likely to slip

Redesigned, easy-to-press switch lever

can be pressed without gripping the front handle deep in your palm, allowing for easy control.



Reverse function to clear jams

When the shear blades are jammed with branches, the shear blades are reversed for a moment to clear the jam by pressing the Reverse button and then pulling the trigger.



LED

Reverse button to clear jams

Accessories

Model No.	Shear blade set	Blade cover	Chip receiver	Grease vessel set
UH020G (500mm)	1914G4-7	413L91-8	1910T1-0	199450-5

XPT / IPX4-compatible

High water-resistance allows the user to operate the tool even if it is wet with water.

Charging Time

Model	Fast Charging	
	DC40RA	DC40RC
*1 BL4020 2.0Ah 191L29-0	22 min	30 min
*1 BL4025 2.5Ah 191B36-3	28 min	38 min
*1 BL4040/F 4.0Ah 1910N6-8	45 min	67 min
BL4050F 5.0Ah 191L47-8	50 min	85 min
BL4080F 8.0Ah 191X65-8	76 min	170 min

*1 Recommended battery

Cordless Hedge Trimmer

UH020G 500mm (19-3/4")

- Brake
 - Constant Speed
 - Grass Tangle Removing Function
 - Anti-restart function
- Standard Equipment :**
Blade cover, Chip receiver, Battery, Charger
- *EN62841-4-2
**w/o Chip receiver and Blade cover

Blade length	500 mm (19-3/4")
Tooth Spacing	30.0 mm (1-3/16")
Max branch diameter	20.0 mm (13/16")
Strokes Per Minute	4,200 min ⁻¹
Continuous use	w/BL4040:110 min
Sound pressure level*	83 dB(A)
Noise K factor*	3 dB(A)
Measured sound power level*	91.0 dB(A)
Guaranteed sound power level*	93 dB(A)
Vibration level *	2.5 m/s ² or less
Vibration K factor*	1.5 m/s ²
Dimensions (L x W x H)	w/BL4040: 929 x 207 x 185 mm (36-1/2 x 8-1/8 x 7-1/4")
Net weight**	3.0 - 4.2 kg (6.6 - 9.3 lbs.)
Net weight (Battery)	BL4020 - BL4080F

The weight may differ depending on the attachment(s), including the battery cartridge. Items of standard equipment and specifications may vary by country or area.

Makita Singapore Pte Ltd

7, Changi South Street 3, Singapore 486348
Phone : +65-6546-8700 Fax : +65-6546-8711
Email : msgproductteam@makita.com.sg
Website : www.makita.com.sg
Facebook : www.facebook.com/MakitaSG



[f MakitaSG](#)



VISIT OUR WEBSITE



DOWNLOAD LEAFLET

PRINTED IN SINGAPORE