

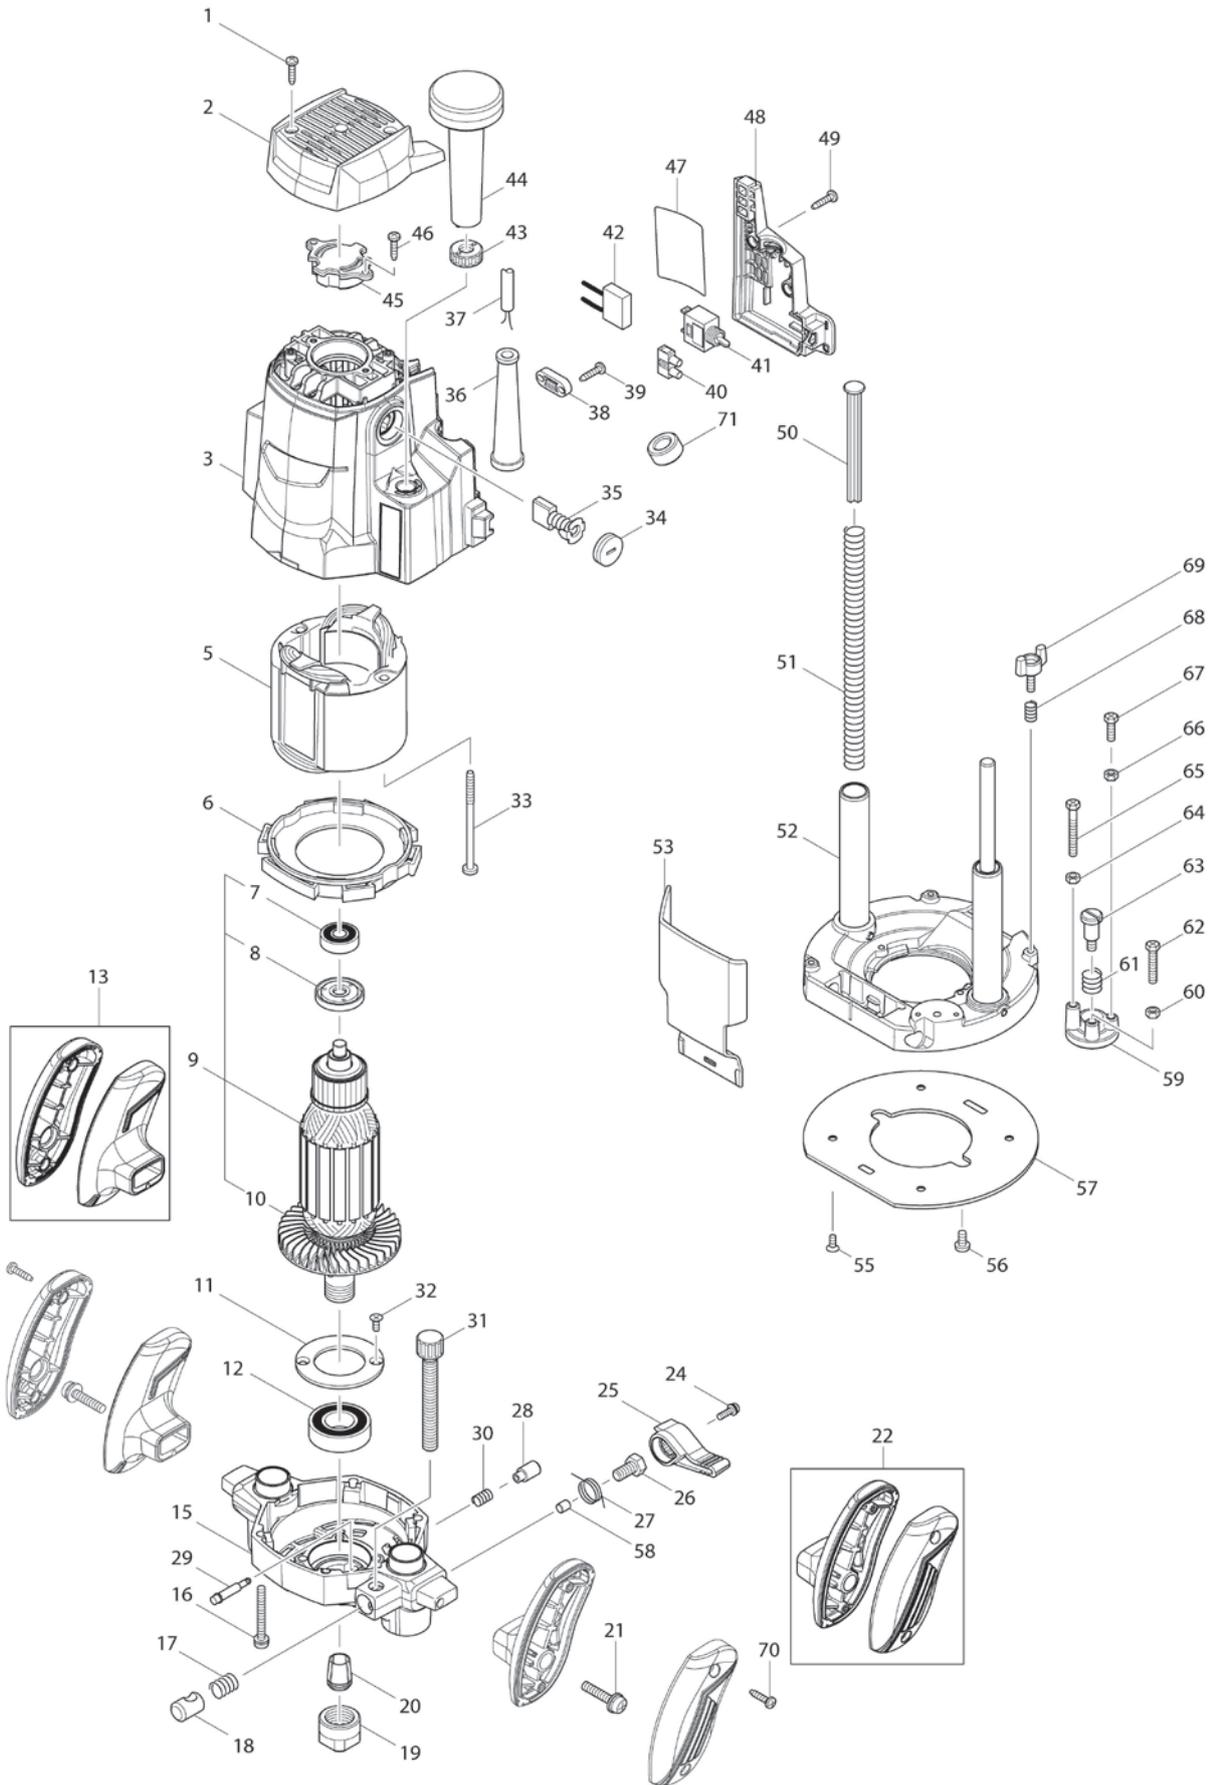


Diagram / Parts List

M3600
Router



(SG) M3600 / Router



SG	SINGAPORE
-----------	------------------

M3600 / Router

Item	Sub	Parts No.	Parts Description	Qty	I/C	E/C No.	Close No.	Remark
001		266326-2	Binding head tapping screw 4X18	2				
002		454025-0	Top cover	1				
003A		143576-5	Motor housing complete	1				
003B		143591-9	Motor housing complete	1				
	C10	643564-7	Brush holder	2				
	C20	816811-1	Scale label	1				
005		596379-0	Field assembly 240V	1				
	C10	654237-7	Ring terminal	2			B6979	
	C11	654451-5	Ring terminal	2	O	B6979		
	C20	654502-4	Non-insulated splice	2			B6826	
	C21	654486-6	Non-insulated splice	2	>	B6826		
	C11	654451-5	Ring terminal	2				
	C21	654486-6	Non-insulated splice	2				
006		418486-8	Baffle plate	1				
007		211381-9	Ball bearing 629ZZ	1				
008		681666-1	Resin washer	1				
009		517884-4	Armature assembly 240V	1				
	D10		INC. 7,8,10					
010		240069-4	Fan 83	1				
011		285711-0	Bearing retainer 50	1				
012		211335-6	Ball bearing 6004ZZ	1				
013A		187514-7	Grip L set	1				
013B		183C93-1	Grip L set	1				
015		141868-6	Motor bracket complete	1				
016		911268-2	Pan head screw M5X45 WR	4				
017		233397-4	Compression spring 11	1				
018		324424-9	Half nut	1				
019		763629-0	Collet nut	1				
020		763622-4	Collet cone 12.7	1				
021		911353-1	Pan head screw M6X30 WR	2				
022A		187517-1	Grip R set	1				
022B		183C94-9	Grip R set	1				
024		265099-4	Pan head screw M4X14	1				
025		454033-1	Lock lever	1				
026		266335-1	Set bolt M8X16	1				
027		231670-6	Torsion spring 16	1				
028		286270-7	Cap 11	1				
029		256482-6	Shoulder pin 6	1				
030		233396-6	Compression spring 7	1				
031		265759-8	Thumb screw M10X80	1				
032		265135-6	Countersunk head screw M4X10	2				
033		266328-8	Binding head tapping screw 5X80	2				
034		643700-5	Holder cap 7-18	2				
035		191953-5	Carbon brush set CB-203	1			Y09370	
035-1		194991-6	Carbon brush set CB203	1	O	Y09370		
036A		682540-6	Cord guard 9.3-90	1			DU346	
036B		682574-9	Cord guard 10	1			DU346	
036-1		682585-4	Cord guard 10	1	<	DU346		
037A		692516-5	Power supply cord 1.0-2-2.0	1			B3557	
037-1A		692706-0	Power supply cord 1.0-2-2.0	1	O	B3557	C3347	
037-1B		692516-5	Power supply cord 1.0-2-2.0	1				
037-2A		692516-5	Power supply cord 1.0-2-2.0	1	O	C3347		
038A		687124-5	Strain relief	1				
038B		687140-7	Strain relief	1				
039		266326-2	Binding head tapping screw 4X18	2				
041A		651425-7	Switch STL115ADT	1			C2203	
041-1A		651066-9	Switch ST115A-TB-S1	1	O	C2203		
041-1B		651066-9	Switch ST115A-TB-S1	1				
043		418484-2	Nylon nut M10	1				
044		153764-6	Knob 50 complete	1				
045		317747-2	Bearing box	1				
046		266326-2	Binding head tapping screw 4X18	2				
047		851Y27-1	Name plate M3600	1				
048		454027-6	Switch cover	1				
049		266326-2	Binding head tapping screw 4X18	2				

A:M3600G(H)
B:M3600B(H)

Interchange
O : Yes
X : No
< : the new part can be substituted for the current.
> : the current part can be substituted for the new.
S : Interchangeable as a set.

