Satisfy Professional's Needs

XGT

Makita®

Cordless Hedge Trimmer
UH006G / UH007G

XGT 40V max Li-ion

Optimum for rough cutting of thick branches

Sharp edge Blade

UH006G
600 mm (23-5/8")

UH007G
750 mm (29-1/2")



Run time*
High/ Med/ Low
85/ 160/ 370 min

Strokes per minute
High speed mode (No load speed)
5,000 min^{-1}

*Continuous run time on a single full battery charge/ No load continuous run time (approx)

BL MOTOR XPT WG WET GUARD

XGT 40Vmax Li-ion

40Vmax series movie

40Vmax mechanism movie

This movie was filmed in Japan.
Models and specs may vary by country.

BL motor provide high power and excellent cutting performance

BL MOTOR

photo: UH006G

Anti-vibration structure
consisting of Motor-crank section and handle section linked by cushions to absorb vibration from blade and motor-crank section

5 position rotating rear handle

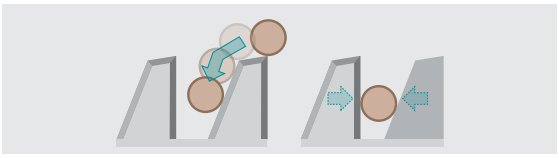

Twigs are caught easily and held firmly
Sharp edge Blade
UH006G / UH007G

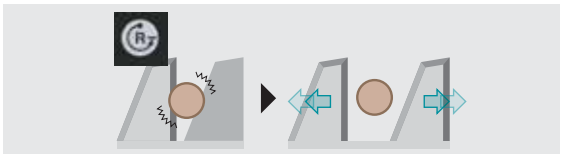

Reverse rotation system
release the blade when it is jammed by thick branches.

3-speed High / Medium / Low

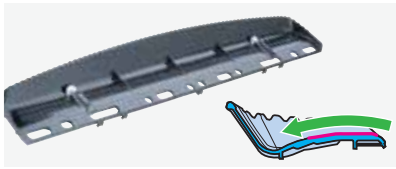

NEW Chip receiver
can make it easier for user to collect leaf and twig debris, thanks to:
- lower height of the connecting hooks
- reduced step height of the edge of the chip catching plate

WG WET GUARD **Wet Guard**
High water-resistance allows to operate the machine even if it is wet with water.

XPT
eXtreme Protection Technology
Enhanced Dust and Drip-proof Performance ensure reliable operation even under bad weather

Accessories

Model	Shear blade assembly	Blade Cover	Chip receiver assembly set
UH006G	191R55-5	458414-1	191R51-3
UH007G	191R56-3	458415-9	191R52-1

Charging Time Reference

40Vmax Li-ion	DC40RA (Fast Charging)	DC40RC
*1BL4020 2.0Ah	22min	30min
*1BL4025 2.5Ah	28min	38min
*1BL4040 4.0Ah	45min	67min
BL4050F 5.0Ah	50min	85min

*1 Recommended battery

Cordless Hedge Trimmer — UH006G, UH007G

- Brake
- Reversing
- Electronic 3-Speed
- Constant Speed
- Anti Vibration

	UH006G	UH007G
Blade Length	600 mm (23-5/8")	750 mm (29-1/2")
Max Cutting Capacity	25.0 mm (1")	25.0 mm (1")
Strokes Per Minute	High / Mid / Low:	High / Mid / Low:
(SPM)	4,000 / 3,000 / 2,000	4,000 / 3,000 / 2,000
Sound Pressure Level	81 dB(A)	81 dB(A)
Sound Power Level	92 dB(A)	92 dB(A)
Vibration Level	Front / Rear:	Front / Rear:
	3.0 / 2.5 m/s² or less	3.4 / 3.1
Dimensions	w/ BL4020 / BL4025:	w/ BL4020 / BL4025:
(L x W x H)	1,123 x 223 x 191 mm	1,274 x 223 x 191 mm
	(44-1/4 x 8-3/4 x 7-1/2")	(50-1/4 x 8-3/4 x 7-1/2")
Net weight	4.4 - 5.0 kg (9.7 - 11.0 lbs.)	4.6 - 5.2 kg (10.1 - 11.5 lbs.)
Standard Equipment :	Blade Cover, Safety Goggles (country-specific), Chip Receiver, Battery, Charger	

The weight does not include accessories but battery cartridge(s). The lightest and heaviest combination weight of the appliance and battery cartridge(s) are shown in the table.
Items of standard equipment and specifications may vary by country or area.

Makita Singapore Pte Ltd
7, Changi South Street 3, Singapore 486348
Phone : +65-6546-8700 Fax : +65-6546-8711
Email : msgproductteam@makita.com.sg
Website : www.makita.com.sg
Facebook : www.facebook.com/MakitaSG

MakitaSG

VISIT OUR WEBSITE

PRINTED IN SINGAPORE