








# 530 W motor for smooth trimming and light routing applications

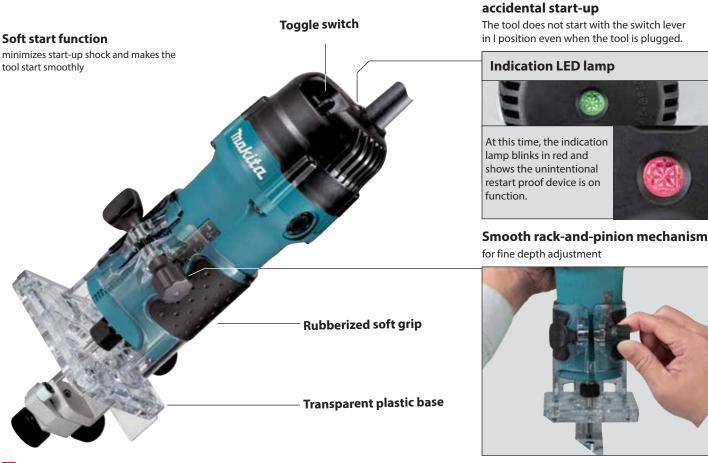

#### Accessories

#### Trimmer base assembly **Fixed Base**

Model 3711 standard base Part No. 194267-1



**Trimmer guide assembly** Part No. 122703-7



## **Collet cone**

Part No. 1/4": 763608-8 6mm: 763607-0 (Optional)



Templet guide 10 Part No. 343577-5



## Chip deflector Part No. 418647-0

Straight guide assembly Part No. 122704-5





1/4" (6mm Optional)

**Anti-restart function minimizes** 



# Trimmer

Double Insulation



Soft Start

3711 (1/4") Continuous Rating Input

Collet Capacity No Load Speed (RPM) Sound Power Level Sound Pressure Level Vibration Level Dimensions (L x W x H)

32,000 94 dB(A) 83 dB(A) Rotation w/o Load: 2.5 m/s<sup>2</sup> or less 82 x 90 x 211 mm (3-1/4 x 3-1/2 x 8-5/16") 1.5 kg (3.3 lbs.)

Net weight Power supply cord 2.5 m (8.2 ft)

Standard Equipment: Collet Cone, Trimmer Guide, Straight Guide Assembly, Templet Guide, Straight Bit, Chip Deflector, Wrench x2

Weight according to EPTA-Procedure 01/2014

Items of standard equipment and specifications may vary by country or area.

### **Makita Singapore Pte Ltd**

7, Changi South Street 3, Singapore 486348 Phone: +65-6546-8700 Fax: +65-6546-8711 Email: msgproduct team@makita.com.sgWebsite: www.makita.com.sg

Facebook: www.facebook.com/MakitaSG







**VISIT OUR WEBSITE** 



**DOWNLOAD LEAFLET**