




Satisfy Professional's Needs



High Power
Durability
Digital
Communication

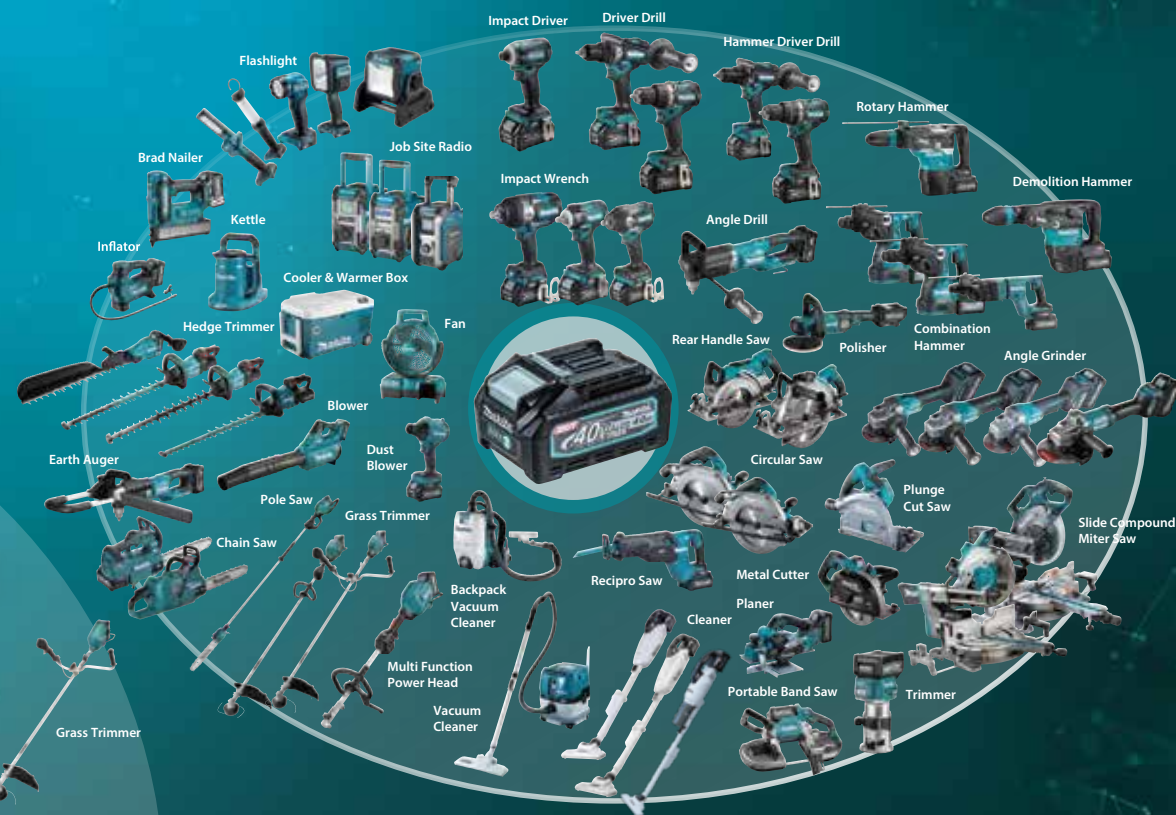

Accessories

Diamond wheel for concrete
Segmented type
355 x 2.8 x 25.4
Part No. E-12996 (EN)



Abrasive cut-off wheel for Metal
355 x 4.3 x 25.4 A24T
5per set
Part No. E-12790-5



Charging Time

	Fast Charging DC40RA	DC40RC
*1BL4040 4.0Ah 191B26-6	45 min	67 min
*1BL4050F 5.0Ah 191L47-8	50 min	85 min
*1BL4080F 8.0Ah	76 min	170 min

*1 Recommended battery

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table.
Items of standard equipment and specifications may vary by country or area.

Makita Singapore Pte Ltd

7, Changi South Street 3, Singapore 486348
Phone : +65-6546-8700 Fax : +65-6546-8711
Email : msgproductteam@makita.com.sg
Website : www.makita.com.sg
Facebook : www.facebook.com/MakitaSG



VISIT OUR WEBSITE



DOWNLOAD LEAFLET

PRINTED IN SINGAPORE



Cordless Power Cutter CE001G 355 mm (14")



Efficiency of
concrete cutting
about **25 %**
UP
Comparison with
Engine tool

[Cutting depth: 50mm]

Low vibration
Front handle Rear handle
2.0/1.2
m/s

[Concrete cutting]

Max. cutting
capacity
127mm

Cutting work amount Battery: BL4050F x 2
Work volume on a single full battery charge
Cut concrete continuously :
50mm x 300mm
Diamond wheel: 355mm
18cuts



40V^{max} Li-ion + 40V^{max} Li-ion **XGT X2** 80V^{max}

More powerful than engine tools and Low vibration



BL
MOTOR



Concrete cutting speed

CE001G 125

Predecessor engine model **100**

slow speed fast

CE001G
Battery: BL4050F x 2 (on a single full battery charge)

Cut concrete continuously: 50mm x 300mm
Diamond wheel: 355mm

Max. cutting capacity

127mm



Equipped with anti-vibration housing

with built-in spring to absorb the vibration from cutting to integrated front and rear handles.

Low vibration
Front handle Rear handle
2.0/1.2
m/s

[Concrete cutting]

Anti-vibration spring

Anti-vibration housing

Drive unit



Electric brake

XPT

eXtreme Protection Technology

Enhanced Dust and Drip-proof Performance ensure reliable operation even under bad weather


WG / IPX4
WET GUARD

High water-resistance allows to operate the machine even if it is wet with water.



AFT Active Feedback sensing Technology

shuts down current to the motor, if the rotation speed suddenly slows down (in the case of kick-back, etc.).

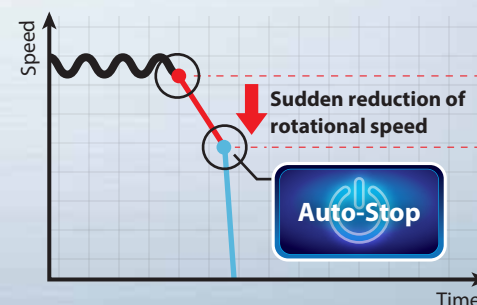


LED job light




- can be turned on/off with a button conveniently located on the rear handle.
- automatically shuts off when the switch trigger is not pulled for 60 seconds.

LED on/off button



Lock-off button

Overload indicator lamp



Water supply kit can be connected.



Optional accessory