



Cordless Power Cutter DCE090 230 mm (9")



Max cutting depth
88 mm

Cordless
Powered by two 18V LXT
Li-Ion batteries in series



Efficient cutting by BL motor



XPT



Overload warning LED lamp

- alerts operator of overload with a red blinking LED.
- reduces unnecessary battery recharging by overload protection.



LED job light

enables operation in the dark sites where electricity is not supplied.



Battery cover

protects battery from water in wet cutting.



Water supply kit can be connected.


The hose is designed to run inside the tool housing to prevent from being caught in objects.

(BRAKE) Electric brake

- After the switch trigger is released:
 - Diamond wheel stops in approximately 4.0 seconds
 - Cut-off wheel stops in approximately 2.0 seconds

AFT Active Feedback sensing Technology

shuts down current to the motor to protect user, if the rotation speed suddenly slows down (in the case of kick-back, etc.).

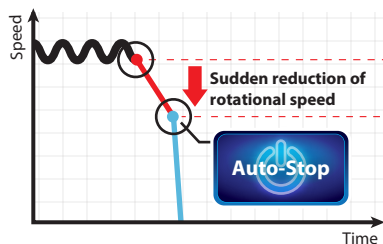

Accessories

Abrasive Cut-off Wheel / Inox

Part No. E-03006
230 x 2.0 x 22.23 WA36R



Diamond Wheel 230mm Segmented

Part No. E-02967
230 x 22.23 Dry & Wet



230mm Diamond wheel ideal for cordless power cutter

- New diamond wheel with even pattern placement of diamond grits
- The grit arrangement provides sharp cutting edge constantly.

Charging Time

	DC18RC	DC18RD	DC18SD
18V LITHIUM-ION			
BL1815N 1.5Ah	15 min	30 min	
BL1830B 3.0Ah	22 min	60 min	
BL1850B 5.0Ah	45 min	110 min	
BL1860B 6.0Ah	55 min	130 min	

Cordless Power Cutter

DCE090 230 mm (9")

Brake

Soft Start

Built-in Job Light

Wheel Diameter	230 mm (9")
Wheel Hole Diameter	22.23 mm (7/8")
Max Wheel Thickness	3.0 mm (1/8")
Max Cutting Capacity	88 mm (3-1/2")
No Load Speed (RPM)	6,600
Vibration Level	Left / Right: 5.9 / 4.0 m/s ²
Sound Pressure Level	103 dB(A)
Sound Power Level	114 dB(A)
Dimensions (L x W x H)	554x241x283 mm (21-3/4"x9-1/2"x11-1/8")
Net weight	5.6 - 6.3 kg (12.3 - 13.9 lbs.)

Standard Equipment: Hex Wrench, Wrench, Coupling Sleeve, Battery, Charger

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table. Items of standard equipment and specifications may vary by country or area.

Makita Singapore Pte Ltd

7, Changi South Street 3, Singapore 486348
Phone : +65-6546-8700 Fax : +65-6546-8711
Email : msgproductteam@makita.com.sg
Website : www.makita.com.sg
Facebook : www.facebook.com/MakitaSG



f MakitaSG



VISIT OUR WEBSITE



DOWNLOAD LEAFLET

PRINTED IN SINGAPORE