



# Cordless Earth Auger DDG460



## Battery Powered and Powerful



<p>Continuous run time on full battery charge depth 600mm / with BL1860B (6.0Ah) x2</p>		<p>Lightweight with BL1860B (6.0Ah) x2</p> <p><b>8.2 kg</b></p>
<p>ø150mm</p>	<p>ø200mm</p>	
<p>about <b>155</b> holes</p>	<p>about <b>90</b> holes</p>	







### Reversing switch

enables to extract, in reverse rotation mode, an auger bit jammed in soil with high resistance like clay soil.



### Torque limiter

The torque limiter will actuate when a certain torque level is reached at the low speed setting. The motor will disengage from the output shaft. When this happens, the drill bit will stop turning.



**BL MOTOR**

**XPT**

Side handle

Reaction receiver

Adapter

Part No. 327687-6

Mechanical 2-speed


Twin LED job light

### For larger holes




### ADT Automatic torque Drive Technology

automatically changes the drilling speed according to load conditions for an optimum operation:

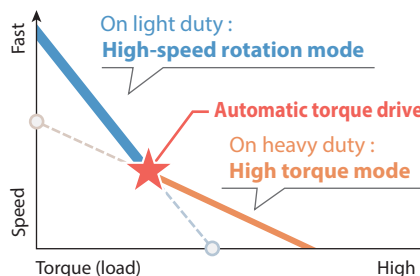

## Accessories

**Earth auger drill bit** Length: 800mm

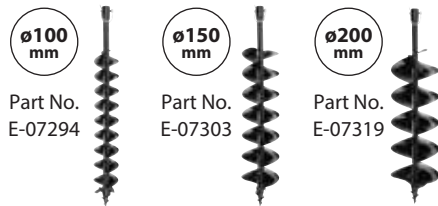

Part No. E-07294

Part No. E-07303

Part No. E-07319

**Blade for earth auger bit** Changing blade for Earth auger drill bit



Part No. E-07630

Part No. E-07646

Part No. E-07652

**Extension bar**

Part No. E-07325

540 mm

**Pin for earth auger drill**

Part No. E-07331



**Handle set**

includes a bar which receives reaction force and an auxiliary handle, and helps the user drill holes in the ground easier.

Part No. 191P11-3



## Cordless Earth Auger DDG460

- Variable Speed
- Brake
- Reversing
- Mechanical 2-Speed
- Torque Limiter
- Soft Start
- Built-in Job Light
- Carrying Case

**Standard Equipment:** Chuck Key, Hex Wrench, Adapter, Battery, Charger

<b>Capacity</b>	Sandy Soil: 200 mm Clay Soil: 150 mm
<b>No Load Speed (RPM)</b>	High / Low: 0 - 1,400 / 0 - 350
<b>Max Fastening Torque</b>	High: 48 N·m (430 in.lbs.) Low: 136 N·m (1,210 in.lbs.)
<b>Vibration Level</b>	2.5 m/s <sup>2</sup> or less
<b>Sound Pressure Level</b>	85 dB(A)
<b>Sound Power Level</b>	96 dB(A)
<b>Dimensions (L x W x H)</b>	840 x 607 x 223 mm (33 x 23-7/8 x 8-3/4")
<b>Net weight</b>	7.3 - 8.2 kg (16.1 - 18.1 lbs.)

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table. Items of standard equipment and specifications may vary by country or area.

## Makita Singapore Pte Ltd

7, Changi South Street 3, Singapore 486348  
Phone : +65-6546-8700 Fax : +65-6546-8711  
Email : msgproductteam@makita.com.sg  
Website : www.makita.com.sg  
Facebook : www.facebook.com/MakitaSG



MakitaSG



VISIT OUR WEBSITE



DOWNLOAD LEAFLET

PRINTED IN SINGAPORE