

7.2V -1.5Ah NEW
Li-ion battery BL0715

Use of the stick-type Li-ion battery allows for compact and lightweight tool design.




Comparison of Products

1. The test results depend to a great extent on the hardness of the material, etc.
2. Numbers in the charts below are relative values when the capacities of **Conventional model** is indexed at 100.


Cordless Impact Driver

Drove ø3.1x25mm wood screw into Merapi

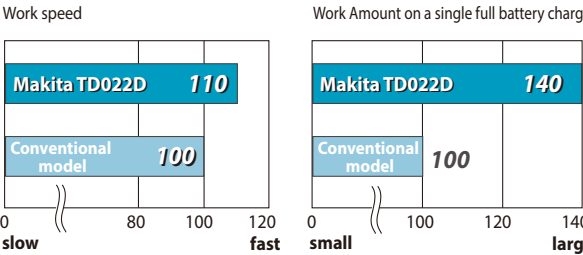

Cordless Driver Drill

Drove 3.8x25mm Coarse thread screws into an SPF plate in high speed mode.

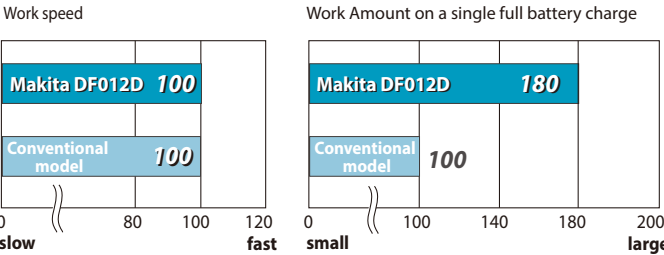

Cordless Impact Driver

TD022D



- Variable Speed
- Brake
- Reversing
- Built-in Job Light
- Carrying Case

Hex Shank	6.35 mm (1/4")
No Load Speed (RPM)	0 - 2,450
Impacts Per Minute (IPM)	0 - 3,000
Max Fastening Torque	25 N·m (220 in·lbs)
Capacity	Machine screw: M3 - M8 (1/8" - 5/16") Standard bolt: M3 - M8 (1/8" - 5/16") High strength bolt: M3 - M6 (1/8" - 1/4") Coarse thread (in length): 22 - 45mm (7/8" - 1-3/4") Fastening Bolt: 7.0 m/s ²
Vibration Level	85 dB(A)
Sound Pressure Level	96 dB(A)
Sound Power Level	96 dB(A)
Dimensions (L x W x H)	Straight Type: 282x42x52mm (11-1/8"x1-5/8"x2-1/16") Pistol Type: 227x42x142mm (8-15/16"x1-5/8"x5-5/8")
Net weight	0.56 kg (1.2 lbs)

Standard Equipment : Holster, Bit set, Battery, Charger

Cordless Driver Drill

DF012D



- Reversing
- Mechanical 2-Speed
- Torque Setting 21
- Built-in Job Light
- Carrying Case

Capacity	Steel: 5 mm (3/16") Wood: 6 mm (1/4")
No Load Speed (RPM)	High: 650 Low: 200
Max Fastening Torque	Hard / Soft: 5.6 / 3.6 N·m (50 / 32 in·lbs.)
Max lock torque	8.0 N·m (71 in·lbs.)
Vibration Level	Drilling Into Metal: 2.5 m/s ² or less
Sound Pressure Level	70 dB(A) or less
Dimensions (L x W x H)	Pistol style: 218x44x142mm (8-5/8"x1-3/4"x5-5/8")
Dimensions (L x W)	Straight style: 273x44mm (10-3/4"x1-3/4")
Net weight	0.53 kg (1.2 lbs.)

Standard Equipment : Phillips Bit, Battery, Charger

weight according to EPTA-Procedure 01/ver.2.1
Items of standard equipment and specifications may vary by country or area.



Cordless Impact Driver TD022D
Cordless Driver Drill DF012D

High Power & High Speed

Impact Driver
TD022D



1.5Ah **NEW** battery



Battery capacity
50% up*

*Compared to BL7010



High Torque Accuracy

Driver Drill
DF012D

Makita Singapore Pte Ltd

7, Changi South Street 3, Singapore 486348
Phone : +65-6546-8700 Fax : +65-6546-8711
Email : msgproductteam@makita.com.sg
Website : www.makita.com.sg
Facebook : www.facebook.com/MakitaSG



MakitaSG



VISIT OUR WEBSITE



DOWNLOAD LEAFLET

PRINTED IN SINGAPORE

High Power & High speed Impact Driver TD022D



High torque accuracy

Driver Drill DF012D



Fastening speed 10%UP*



*conventional models

High fastening torque
25N·m

High speed (no load)
0-2,450 rpm

More work amount



**The test results depend to a great extent on the hardness of the material, etc.

Drove wood screw into Merapi**
Work Amount on a single full battery charge

**ø3.1x25mm
320pcs**

**ø4.1x45mm
65pcs**

High torque accuracy



Auto-stop clutch
The motor automatically stops at the moment when the clutch is disengaged.

Auto-stop system
Indication lamp warns user visually of battery power reduction when it reduces to a certain low level. If battery power reduces further, the motor automatically stops to prevent incomplete fastening.

More work amount



**The test results depend to a great extent on the hardness of the material, etc.

Drove wood screw into Merapi**
Work Amount on a single full battery charge

**ø3.8x25mm
350pcs**

**ø3.8x38mm
210pcs**

Common features

LED Job light Brightly illuminates a spot and the periphery by enlarging the illuminated area.



Can be used as a hand Screwdriver



Compact and lightweight

- Can be easily converted from straight- to pistol-form.
- Easy handling



Lightweight at only with battery

TD022D **0.56kg**

DF012D **0.53kg**

