



Variable speed control dial

allows operator to adjust cutting speed depending on material or application.




Dual LED job lights

Active Feedback sensing Technology

AFT

Torque limiter turns the motor off if the tool is suddenly forced to lock



XPT


EXTREME PROTECTION TECHNOLOGY

Dust and drip-proof performance is enhanced for use in outdoor applications or harsh environments.

Accessories

Dust Extractor Attachment Set

Part No. 196536-6

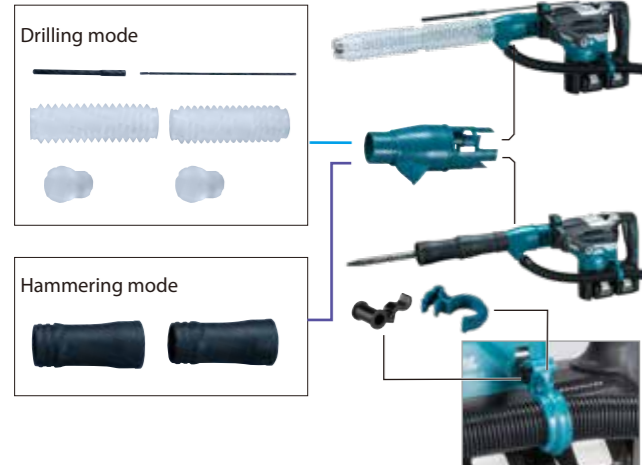

Dust Extractor Attachment Set Hammering only

with Vacuum hose set

Part No. 196571-4



Cordless Rotary Hammer DHR400N 40 mm (1-9/16")	
Variable Speed	Impact Energy EPTA-Procedure 05/2009: 8.0 J Our experimental conditions: 11.4 J
Brake	Capacity Concrete (w/ T.C.T. bit): 40 mm (1-9/16") Concrete (w/ Core bit): 105 mm (4-1/8")
Reversing	Blows Per Minute (BPM) 1,450 - 2,900
SDS-MAX Shank	No Load Speed (RPM) 250 - 500
Torque Limiter	Sound Pressure Level 91 dB(A)
Constant Speed	Sound Power Level 102 dB(A)
Soft Start	Vibration Level Hammer Drilling Into Concrete: 5.0 m/s ²
Dust Collection	Dimensions 473x120x285 mm
Built-in Job Light	(L x W x H) (18-5/8"x4-3/4"x11-1/4")
Carrying Case	Net weight 7.3 - 8.1 kg (16.1 - 17.9 lbs)
Standard Equipment: Side Handle, Side Grip, Depth Gauge, Bit Grease, Cloth, Wireless Unit (country-specific), Battery, Charger	

Items of standard equipment and specifications may vary by country or area.

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table.



Cordless Rotary Hammer DHR400N 40 mm (1-9/16")

Satisfy Professional's Needs



Adapted for SDS-MAX bits

High Power similar to AC Tool

with Active Feedback sensing Technology

Extra Comfort with low level of vibration

18v + 18v → 36v



Makita Singapore Pte Ltd

7, Changi South Street 3, Singapore 486348
Phone : +65-6546-8700 Fax : +65-6546-8711
Email : msgproductteam@makita.com.sg
Website : www.makita.com.sg
Facebook : www.facebook.com/MakitaSG



MakitaSG



VISIT OUR WEBSITE



DOWNLOAD LEAFLET

PRINTED IN SINGAPORE





Adapted for SDS-MAX bits

Excellent performance equivalent to AC Model

18v + 18v → 36v

Newly developed BL motor delivers high power



Drilling work amount

Work volume on a single full battery charge

About **25** holes

- ◆ w/ T.C.T. bit Ø18mm
- ◆ Depth : 140mm
- ◆ Concrete : 40 N / mm²
- ◆ Battery : BL1850B x2

Demolition work

with bull point

Impact Energy

[EPTA-Procedure 05/2009]

8.0 J

Makita HR4013C 8.0J

AVT & SOFT NO LOAD

ANTI VIBRATION TECHNOLOGY

Vibration absorbing housing isolates handle and motor.

Active dynamic vibration absorber moves in the opposite direction to the drive piston to reduce vibration.

Damper spring absorbs impact vibrations from the drill bit.



Auto-start Wireless System



Wireless unit

Part No. 199393-1



DVC864

Switch on the tool Vacuum cleaner is activated

■ Comparison of Vibration level* and Time to reach ELV (Exposure Limit of Vibration)**

* It is known as the tri-axial value and value at Directive of A(8).

**It means the maximum amount of vibration that an operator may be exposed to on any single day.

Time to reach ELV (min)	100	200	550
Makita DHR400N	5.0m/s ²		540min
Makita HR4013C	5.0m/s ²		540min
Vibration level (m/s ²)	0	5	10 15

AWS connects to power tool via Bluetooth.

Wireless unit



The Bluetooth® word mark and logos are registered trademarks owned by the Bluetooth SIG, Inc. and any use of such marks by Makita is under license. Other trademarks and trade names are those of their respective owners.

Expand AWS Line-up

