




Cordless High Pressure Washer DHW080

No need to connect to outlet or tap

Various options

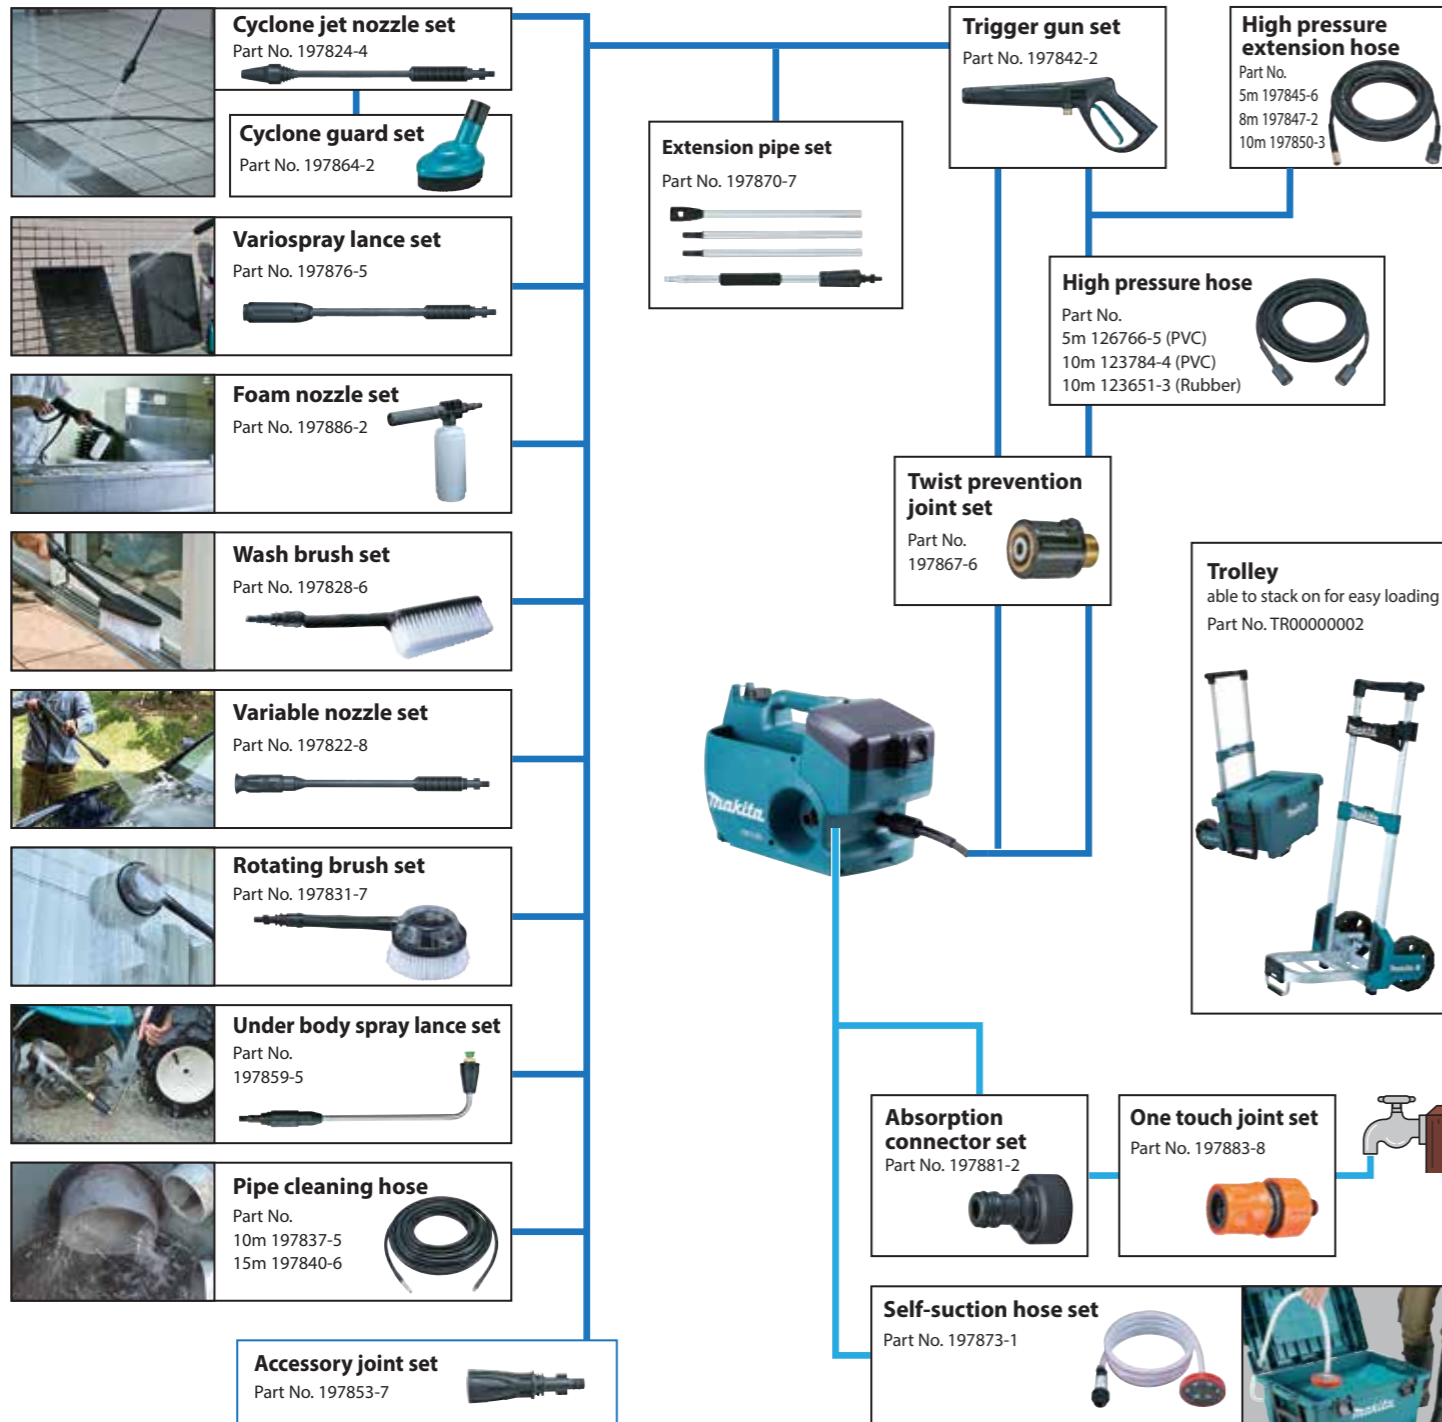

Cordless High Pressure Washer DHW080

Electronic 2-Speed

| | |
|--------------------------|---|
| Max Feed Volume | 6.3 L/min |
| Water Flow Rate | High / Low: 5.5 / 4.0 L/min |
| Max Permissible Pressure | 8.0 MPa |
| Working Pressure | High / Low: 5.5 / 3.0 MPa |
| Max Feed Temperature | 40 °C |
| Max Suction Height | 1 m |
| Max Run Time (min) | w/ BL1850B x2: High / Low: 12.5 / 28 |
| Hose Length | 5 m |
| Vibration Level | 2.5 m/s ² or less |
| Sound Pressure Level | 70.9 dB(A) |
| Dimensions (L x W x H) | 438x218x269 mm (17-1/4"x8-5/8"x10-5/8") |
| Net weight | 7.1 - 7.7 kg (15.6 - 17.0 lbs.) |

Standard Equipment: Trigger Gun, High Pressure Hose 5 m, Suction Hose, Cleaner Pin, Storage Box, Variable nozzle, Connector, One touch joint

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table. Items of standard equipment and specifications may vary by country or area.

Makita Singapore Pte Ltd
7, Changi South Street 3, Singapore 486348
Phone : +65-6546-8700 Fax : +65-6546-8711
Email : msgproductteam@makita.com.sg
Website : www.makita.com.sg
Facebook : www.facebook.com/MakitaSG



MakitaSG



VISIT OUR WEBSITE



DOWNLOAD LEAFLET

PRINTED IN SINGAPORE

Max tank capacity

50 about
L

Working Pressure

5.5 / 3.0
(High / Low) MPa

18v + 18v → 36v



No power outlet required, No water source required.

Cars, walls, steps, etc. can be cleaned anywhere at any time.



Storage example



Variospray lance set



Cyclone jet nozzle set



Wash brush set



Foam nozzle set



Variable nozzle set



Pipe cleaning hose



Under body spray lance set




Rotating brush set



Free from cord



Supplying water from a tank/reservoir

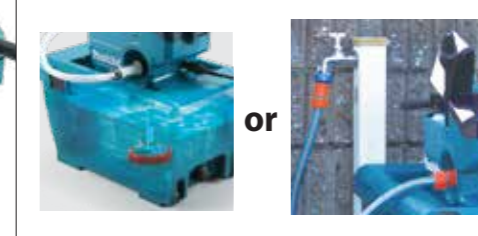

Multi function storage case

Suction tank function + storability



Feed-water inlet



Easy to transport

Transportable with the machine body stored in the tank.



*When carrying the storage box by the handle, water may spill out if there is plenty of water inside.

*When carrying this model located on the lid of the storage box by the handle, the model may drop off from the storage box.

MAKPAC (Option)

MAKPAC case can be installed on the lid.



| | | | | | | |
|--|------------------------|-----------------------|--------------|------------------------|------------------------|--|
| Total amount of water flow under normal use on a full battery charge | Run time (w/BL1850Bx2) | Working Pressure | Power Switch | Working Pressure | Run time (w/BL1850Bx2) | Total amount of water flow under normal use on a full battery charge |
| 110 about L with Variable nozzle | 28 about min | 3.0 MPa Low | OFF ON | 5.5 MPa High | 12.5 about min | 70 about L with Variable nozzle |

