

LED job light

Carrying handle
for easy transport to jobsite

Battery fuel gauge

Powered by 18V Li-ion batteries in series

LXT

1.5Ah BL1815N

3.0Ah BL1830B

18V LITHIUM-ION

5.0Ah BL1850B

6.0Ah BL1860B


Can be attached with a vacuum cleaner.

**Laser line function**

Laser marker for easy tracing of ink line



Mini sub fence
provides wide guide support when performing vertical cut or left bevel cut.



Mini sub fence

Max. cutting capacity (mm) (height x width) with 165mm (6-1/2") saw blade

Cross Cut	Miter Cut (left & right)	Bevel Cut (left & right)	Compound Cut
46 x 92 (1-13/16" x 3-5/8")	Miter: 45° left/ right 46 x 65 (1-13/16" x 2-9/16") Miter: 52° left/ right 46 x 56 (1-13/16" x 2-3/16")	Bevel: 45° left 30 x 92 (1-3/16" x 3-5/8") Bevel: 45° right 15 x 92 (9/16" x 3-5/8")	Bevel: 45° left / Miter: 45° left/ right 30 x 65 (1-3/16" x 2-9/16") Bevel: 45° right / Miter: 45° left/ right 15 x 65 (9/16" x 2-9/16")

Accessories
T.C.T Saw Blade



Size (mm)	Plate (mm)	Kerf (mm)	Rake (degree)	Wood	Aluminum	Part No.
165 x 20 x 64T	1.4	1.9	10°	✓		B-56487
165 x 20 x 60T	1.2	1.8	5°		✓	B-56530

Cordless Compound Miter Saw**DLS600 165 mm (6-1/2")**

- Brake
- Soft Start
- Bevel Cutting 45 LR
- Laser Marker
- Dust Collection
- Built-in Job Light

Blade Diameter	165 mm (6-1/2")
Miter Angle	52° L / 52° R
Bevel Angle	46° L / 46° R
Max Cutting Capacity	90° Miter: 46 x 92 mm (1-13/16" x 3-5/8")
No Load Speed (RPM)	5,000
Sound Pressure Level	90 dB(A)
Sound Power Level	97 dB(A)
Vibration Level	2.5 m/s² or less
Dimensions (L x W x H)	340x400x440 mm (13-3/8"x15-3/4"x17-1/4")
Net weight	6.3 - 6.6kg (13.9 - 14.6lbs.)

Standard Equipment: TCT Saw Blade, Dust Bag, Vertical Vise, Hex Wrench, Triangular Rule, Battery, Charger

Items of standard equipment and specifications may vary by country or area.

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table.

Makita Singapore Pte Ltd

7, Changi South Street 3, Singapore 486348
Phone : +65-6546-8700 Fax : +65-6546-8711
Email : msgproductteam@makita.com.sg
Website : www.makita.com.sg
Facebook : www.facebook.com/MakitaSG



MakitaSG



VISIT OUR WEBSITE



DOWNLOAD LEAFLET

PRINTED IN SINGAPORE

Makita

Cordless Compound Miter Saw
DLS600 165 mm (6-1/2")

LXT
LITHIUM-ION

BL MOTOR ADT DXT



Excellent portability

Suitable for Cutting Baseboard and Ceiling Trim, etc.




shoulder strap for easy job site portability (option)




Part No. 166058-0

Compact and lightweight body

165 mm (6-1/2") Cordless Compound Miter Saw

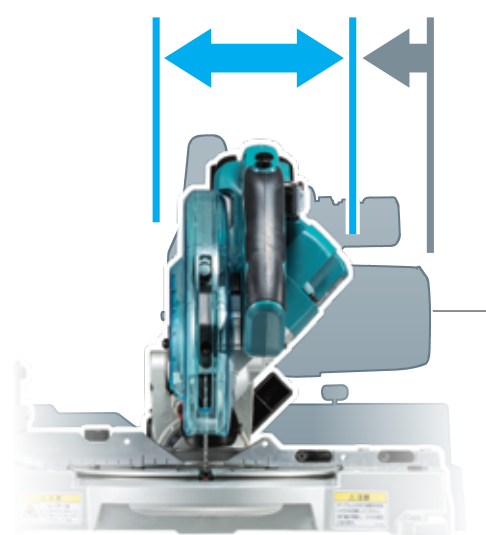

Our predecessor model
216mm Compound Miter Saw

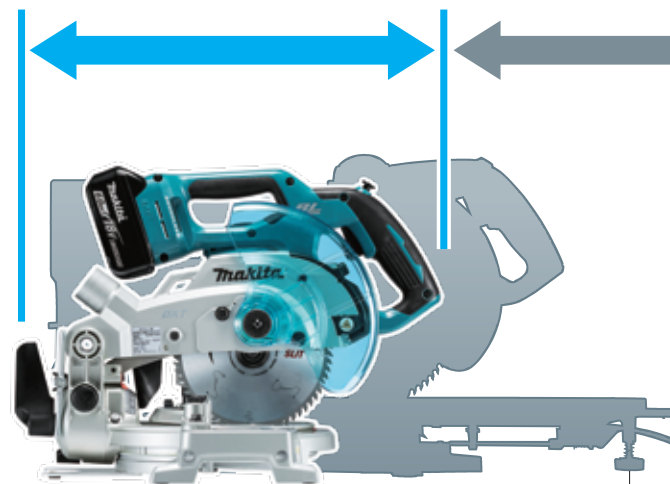

Our predecessor model
165mm Slide Compound Miter Saw

Crosscuts up to 46 x 92 mm at 90°

suitable for cutting baseboard of max 90mm often used in construction site despite the compact body (Blade diameter: 165mm).

DXT



**BL
MOTOR**


**Powerful
5,000RPM**



**Excellent
work amount**

When using BL1860B, about 270 baseboards of 15x90mm can be cut by cutting at 45° bevel.

ADT

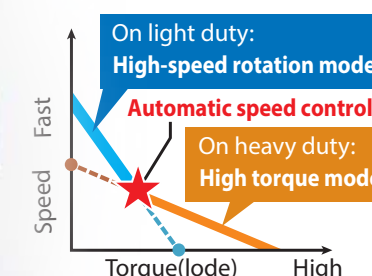

Automatic torque Drive Technology (ADT) adjusts speed and torque during operation for optimum performance

Double bevel design

The saw head can tilt left and right 0° to 45° (up to 46° when using release lever), enabling user to cut a workpiece without flipping it to match each corner.



Laser line function

