




Cordless Area Worklight DML810



Max 5,500lm Self-Righting Area Light

Powered by both

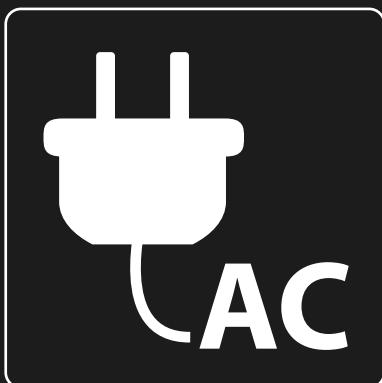

and

18V
LITHIUM-ION

One or Two



Self-righting design



Max 5,500lm Cordless Area Worklight

Self-righting design
won't fall over even if bumped.

Light diffusing lens

202 super luminous daylight white LEDs: 40.4W (0.2W x 202)



Inlet type AC power supply cord

Detachable and can be stored compactly on the back of the light body when not in use.



Reflector

glows in the dark to help you locate the worklight body.



Padlock hole

for battery theft protection*
*Padlock not included



Switch

3-stage brightness switch
On/off Power switch
Adjustable illumination area switch



3-stage brightness switch

1 Low	2 Medium	3 High
1,500 lm	3,000 lm	5,500 lm
18 h	8.5 h	4.0 h

Continuous run time (Battery : BL1860Bx2)

Adjustable illumination area

left 180°	360°	right 180°

Controller with memory function remembers the brightness setting and the lighting area setting last time you power off, allowing the user to avoid adjusting again.

Powered by both DC and AC



IP54

certified dust and water resistance (only with DC power)

Battery capacity warning function

automatically notifies about reduction in battery capacity with the decrease of illuminance (Only four LEDs are on for notification).



AC outlet for connecting multiple units together

- Up to 8 units can be connected together.
- Equipped with a circuit breaker for protection from overload.



Carrying handle

having openings through which anti-theft chain or cable can pass.



Cordless Area Worklight

DML810

Run Time (hrs)	High: 4.0 / Medium: 8.5 / Low: 18
Illuminance (High / Med / Low)	at 1m from the light source: 550 / 300 / 150 lx at 3m from the light source: 70 / 40 / 20 lx at 5m from the light source: 25 / 15 / 7 lx
Luminous Flux	High / Med / Low: 5,500 / 3,000 / 1,500 lm
Dimensions (L x W x H)	420x420x787 mm (16-1/2"x16-1/2"x31")
Net weight	13.9 - 15.3 kg (30.6 - 33.7 lbs.)

Standard Equipment : AC Power Cord
Battery & Charger Sold Separately. Power Supply Cord: 2.5 m (8.2 ft)

*The weight may differ depending on the attachment(s), including the battery cartridge.
Items of standard equipment and specifications may vary by country or area.*

Makita Singapore Pte Ltd

7, Changi South Street 3, Singapore 486348
Phone : +65-6546-8700 Fax : +65-6546-8711
Email : msgproductteam@makita.com.sg
Website : www.makita.com.sg
Facebook : www.facebook.com/MakitaSG



[f MakitaSG](#)



VISIT OUR WEBSITE



DOWNLOAD LEAFLET

PRINTED IN SINGAPORE