



Cordless Worklight
DML811



Delivers Max 3,000 Lumens

Powered by both



and



Luminous flux: max. 3,000lm



Compact design with a short height thanks to the retractable carrying handle



Switch



On / Off

High / Medium / Low




240°

Knob for free adjustment of light angle enables the light source to rotate from -30° to 210° to a desired angle.

3 brightness settings

Controller with memory function remembers the brightness setting last time you power off, allowing to avoid adjusting brightness again.



High

3,000 lm

Medium

1,500 lm

Low

750 lm



AC cord can be stored around the hooks.

Powered by both...



AC

Power Supply Cord: 2.5 m (8.2 ft)



DC

18V LITHIUM-ION
24V LITHIUM-ION

Dust and water resistance (only with DC power)

IP65

For use in outdoor applications or harsh environments

Light source				
(Type : LED 30)	High	medium	Low	
Illuminance (lx)*1	1,800	800	350	
Luminous flux (lm)	3,000	1,500	750	
Continuous run time*2	3.0h	7.0h	13h	

*1 at 1m from the light source

*2 on a single full battery charge, Battery : BL1860B

Battery capacity warning function

automatically notifies about reduction in battery capacity with the decrease of Illuminance (Only one LED is on notification)

1. Full brightness, with all LEDs on.
2. Only one LED is on as the picture below. (This will continue about five to ten minutes in case of using battery.)
3. All LEDs turn off.




Accessories

Tripod

Up to two DML811's can be mounted.
Height : 1,300-2,000mm
Set Screw : M8

Part No.
GM00002073

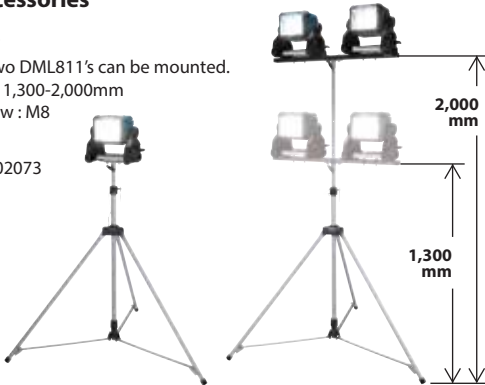

Cordless Worklight DML811

Run Time (hrs)	Up to: 13 (Low mode, with BL1860B)
Illuminance (High / Med / Low) at 1m from the light source:	1,800 / 800 / 350 lx
at 3m from the light source:	200 / 100 / 40 lx
at 5m from the light source:	85 / 40 / 17 lx
Luminous Flux (High / Med / Low) w/ Handle in Retracted Position:	3,000 / 1,500 / 750 lm
Dimensions (L x W x H) w/ Handle in Retracted Position:	249x302x271 mm (9-3/4"x11-7/8"x10-5/8")
w/ Handle in Upright Position:	249x302x361 mm (9-3/4"x11-7/8"x14-1/4")
Net weight	4.1 - 4.8 kg (9.0 - 10.5 lbs.)

Standard Equipment :

Battery & Charger Sold Separately
Power Supply Cord: 2.5 m (8.2 ft)

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table.
Items of standard equipment and specifications may vary by country or area.

Makita Singapore Pte Ltd

7, Changi South Street 3, Singapore 486348
Phone : +65-6546-8700 Fax : +65-6546-8711
Email : msgproductteam@makita.com.sg
Website : www.makita.com.sg
Facebook : www.facebook.com/MakitaSG



f MakitaSG



VISIT OUR WEBSITE



DOWNLOAD LEAFLET

PRINTED IN SINGAPORE