



Cordless Drywall Sander DSL801 225 mm (8-7/8")



Less dust, More comfort

Dust collection rate

95%

Test conditions:

- Operation: 30 second continuous grinding with a constant load
- Grit of Abrasive paper disc: #120
- Variable speed control dial: Position 3



Continuous runtime

35 min

Test conditions:

- Variable speed control dial: Position 3
- Grit of Abrasive paper disc: #120
- Battery: *BL1850B

*on a single full charge



High dust collection rate

18V
LITHIUM-ION



BL
MOTOR

Placing the Brushless motor on head

Constant Speed Control
for smooth finish

Variable speed control dial
No Load Speed: 1,000-1,800min⁻¹
allows operator to adjust sanding speed depending on material or application.




AWS Auto-start Wireless System

The wireless activation function enables clean and comfortable operation. By connecting a supported tool to the cleaner, you can run the cleaner automatically along with the switch operation of the tool.

Wireless unit is compatible with all supported tools



Length adjustable telescopic pipe
Overall length

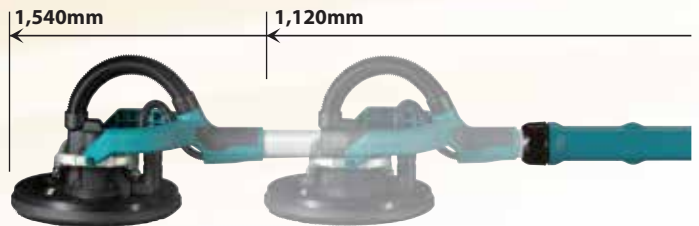

Accessories

Abrasive disc 225

Grit	Part No.
40	B-68389
80	B-68395
120	B-68404
180	B-68410
320	B-68426



Pad

Type	Part No.
Soft	199939-3
Medium	199940-8
Hard	199938-5



Wireless unit

Part No. 199393-1



Wireless adapter set (WUT02)

This adapter enables to use with supported AC vacuum cleaners equipped with auto start/ stop functions.



Extension handle set

Part No. 199937-7



Tool bag

Part No. 195638-5



Cordless Drywall Sander

DSL801 225 mm (8-7/8")

- Variable Speed
- Constant Speed
- Soft Start
- Hook & Loop
- Dust Collection

Pad Diameter	210 mm (8-1/4")
Abrasive Disc Size	225 mm (8-7/8")
No Load Speed (RPM)	1,000 - 1,800
Vibration Level	Disc Sanding: 2.5 m/s ² or less
Sound Pressure Level	75 dB(A)
Dimensions (L x W x H)	1,120-1,540 x 278 x 273 mm
Net weight	4.6 - 5.8 kg (10.1 - 12.8 lbs.)

Standard Equipment: Abrasive Disc, Hex Wrench, Tool Bag, Wireless Unit (country-specific), Front cuffs 24 (country-specific), Battery, Charger

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table. Items of standard equipment and specifications may vary by country or area.

Makita Singapore Pte Ltd

7, Changi South Street 3, Singapore 486348
Phone : +65-6546-8700 Fax : +65-6546-8711
Email : msgproductteam@makita.com.sg
Website : www.makita.com.sg
Facebook : www.facebook.com/MakitaSG



MakitaSG



VISIT OUR WEBSITE



DOWNLOAD LEAFLET

PRINTED IN SINGAPORE