




Cordless Angle Grinder
GA037G 180 mm (7")
GA038G 230 mm (9")

High Power
Durability
Digital Communication

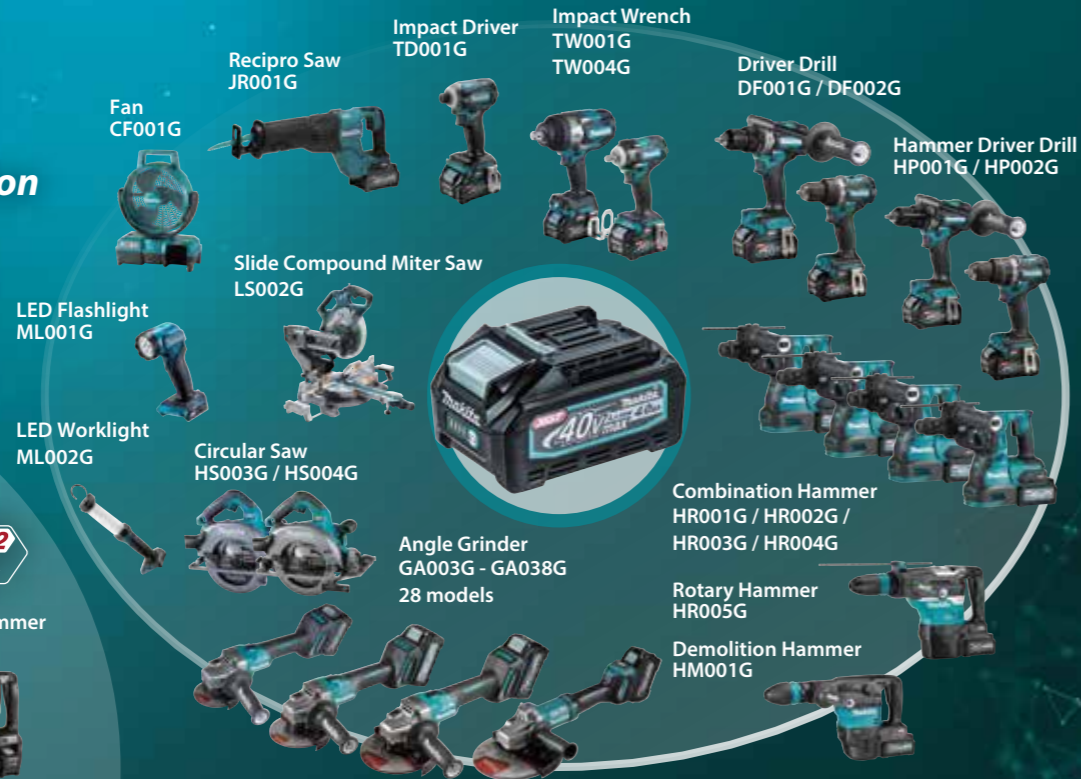

40V Li-ion max

High Power for Heavy Duty



Compatible battery and Portable Power Pack

Portable Power Pack

PDC01[†] Powered by up to four 18V LXT batteries



PDC1200[†]

1,200 Wh high capacity
Approx. 8times more capacity than BL4040

Equipped with built-in battery cells
Charger: DC4001 (191L01-2)
Charging time: 6hours



Adapter set (40Vmax)

Part No. 191N62-4

Battery Charging Time Reference

	DC40RA (Fast Charging)	DC40RC
BL4050F[†] 5.0Ah (191B26-6)	50min	85min
BL4040 4.0Ah (191B26-6)	45min	67min
BL4025 2.5Ah (191B36-3)	28min	38min

[†] Recommended battery

Accessories


Dust collecting wheel guard

GA037G: Part No. 198514-2
Max cutting depth: 35mm
GA038G: Part No. 198440-5
Max cutting depth: 60mm



Wheel cover for cut-off wheel

GA037G: 122914-4
GA038G: 122913-6



Dust collection wheel guard

for 180mm cup diamond wheel
Part No. : 195387-4 with COO
195388-2 without COO



Vibration proof grip set

Part No. 194543-3



Cordless Angle Grinder

GA037G 180 mm (7"), GA038G 230 mm (9")

	GA037G / GA038G
Brake	
Soft Start	
Dust Collection	
Carrying Case	
Standard Equipment:	
Toolless Wheel Cover, Side Grip, Lock Nut Wrench, Battery, Charger	
Country-specific	
Anti-Vibration Grip, Wireless Unit, Interchangeable Adapter ADP10, Toolless Lock Nut	
Wheel Diameter	180 mm (7") / 230 mm (9")
Hole Diameter	22.23 mm (7/8")
No Load Speed (RPM)	7,800 / 6,600
Circumference of Grip Portion	154 mm (6-1/16")
Vibration Level	Surface Grinding w/ Anti-Vibration Side Grip: 7.5 m/s ² Surface Grinding w/ Normal Side Grip: 7.5 m/s ² / 7 m/s ²
Sound Pressure Level	88 dB(A) / 87 dB(A)
Sound Power Level	99 dB(A) / 98 dB(A)
Dimensions (L x W x H)	w/o Battery: 442 x 200 x 156 mm (17-3/8 x 7-7/8 x 6-1/8") / 442 x 250 x 156 mm (17-3/8 x 9-7/8 x 6-1/8") w/ BL4025: 497 x 200 x 156 mm (19-1/2 x 7-7/8 x 6-1/8") / 97 x 250 x 156 mm (19-1/2 x 9-7/8 x 6-1/8") w/ BL4040: 509 x 200 x 164 mm (20 x 7-7/8 x 6-1/2") / 509 x 250 x 164 mm (20 x 9-7/8 x 6-1/2") w/ BL4050F: 535 x 200 x 180 mm (21 x 7-7/8 x 7-1/8") / 535 x 250 x 180 mm (21 x 9-7/8 x 7-1/8")
Net weight	4.4 - 5.4 kg (9.7 - 11.9 lbs.) / 4.6 - 7.4 kg (10.1 - 16.3 lbs.)

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table. *Items of standard equipment and specifications may vary by country or area.*

Makita Singapore Pte Ltd

7, Changi South Street 3, Singapore 486348
Phone : +65-6546-8700 Fax : +65-6546-8711
Email : msgproductteam@makita.com.sg
Website : www.makita.com.sg
Facebook : www.facebook.com/MakitaSG



MakitaSG



VISIT OUR WEBSITE



DOWNLOAD LEAFLET

PRINTED IN SINGAPORE



High power 15%* faster

provides higher wheel rotation speed when heavily loaded, increasing the work efficiency by approx 15%* compared with Predecessor Models.

Concrete cutting

5m*


Cutting depth: 30mm

*with BL4050F



Increased maneuverability

- More lightweight design than predecessor model, which is achieved by using one XGT battery
- Overall length shorter than competitors, which increases maneuverability in overhead or horizontal applications.

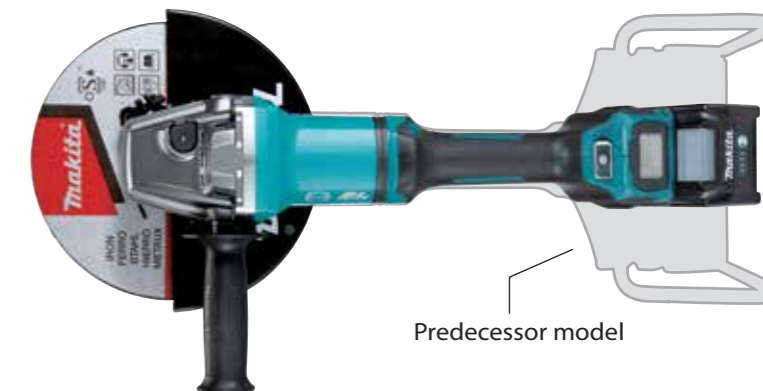

Predecessor model

NEW toolless wheel cover is optimized to have a deeper cutting depth.



GA037G: 46mm
GA038G: 73mm

Large switch lever

with lock-off function (without lock-on function)

Lock-off function minimizes the switch lever from being accidentally pulled.



Anti-restart function


Even if battery is inserted, the motor does not start up when the switch is slide to "on".

Powered by 40Vmax XGT Li-ion battery



AFT Active Feedback sensing Technology

Shuts down the tool, if the rotation speed suddenly slows down.

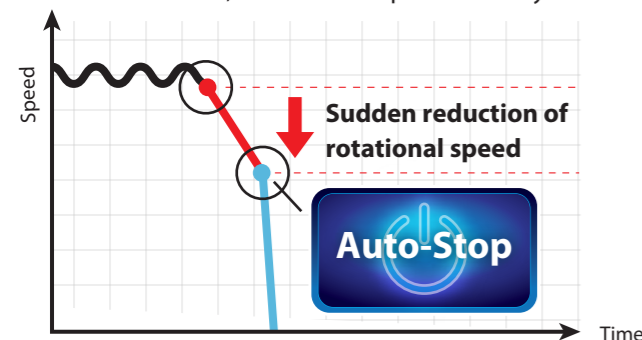

AWS Auto-start Wireless System

connects to compatible vacuum cleaner with Bluetooth. The vacuum cleaner automatically runs while the switch is on.



Electric brake

Electric brake is activated after the tool is switched off.