



40Vmax series movie



40Vmax mechanism movie



This movie was filmed in Japan. Models and specs may vary by country.

Satisfy Professional's Needs




Cordless Demolition Hammer
HM001G



Adapted for SDS-MAX bits

High Power
Durability
Digital Communication

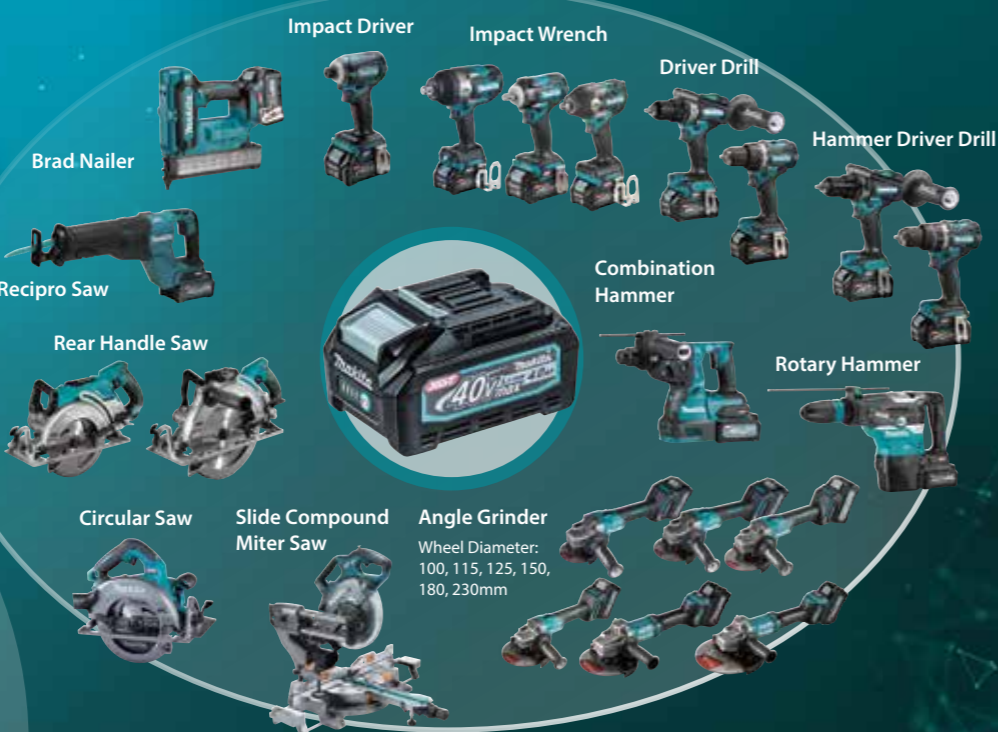

Rotary Hammer HR006G Demolition Hammer HM002G



40V Li-ion max

Impact energy [EPTA-Procedure 05/2009]

9.4 Joule

Portable Power Pack

PDC01

Powered by up to four 18V LXT batteries



PDC1200

Equipped with built-in battery cells



Charger: DC4001
Part No. 191L01-2
Charging time: 6hours

Adapter set (40Vmax)

Part No. 191N62-4

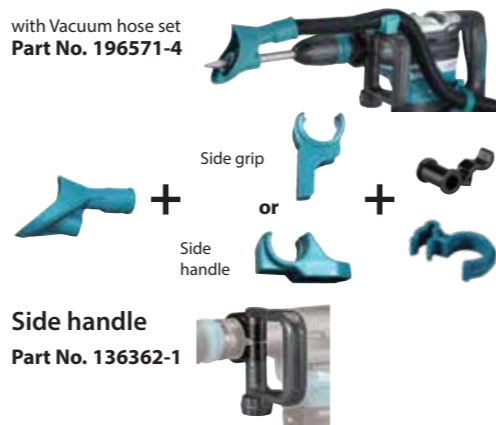


photo: HR005G

Accessories

Dust Extractor Attachment Set

with Vacuum hose set
Part No. 196571-4



Side handle
Part No. 136362-1

Charging Time Reference

	DC40RA (191E08-6) <small>Fast Charging</small>	DC40RC (191M92-9)
	45min	67min
	50min	85min

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table. Items of standard equipment and specifications may vary by country or area.

Cordless Demolition Hammer

HM001G Adapted for SDS-MAX bits

Variable Speed	Impact Energy EPTA-Procedure 05/2009: 9.4 J
SDS-MAX Shank	Blows Per Minute (BPM) 0 - 2,650
Constant Speed	Shank Diameter 18 mm (11/16")
Soft Start	Sound Pressure Level 89 dB(A)
Built-in Job Light	Sound Power Level 100 dB(A)
	Vibration Level Chiselling Function w/ Side Handle: 6.0 m/s ² Chiselling Function w/ Side Grip: 5.5 m/s ²
	Dimensions (L x W x H) w/ BL4040: 496 x 113 x 258 mm (19-1/2 x 4-7/16 x 10-1/8") w/ BL4050F: 516 x 113 x 280 mm (20-1/4 x 4-7/16 x 11")
	Net weight 6.3 - 7.1 kg (13.9 - 15.7 lbs.)

Standard Equipment: Bit Grease, Side Grip (country-specific), Wireless Unit (country-specific), Wireless Unit Adapter (country-specific), Cloth, Battery, Charger



Higher power than corded tools

Makita Singapore Pte Ltd
7, Changi South Street 3, Singapore 486348
Phone : +65-6546-8700 Fax : +65-6546-8711
Email : msgproductteam@makita.com.sg
Website : www.makita.com.sg
Facebook : www.facebook.com/MakitaSG



MakitaSG

VISIT OUR WEBSITE

DOWNLOAD LEAFLET

PRINTED IN SINGAPORE




Impact energy
[EPTA-Procedure 05/2009]
9.4
Joule

HM001G	9.4 Joule
AC tools	8.1 Joule

Anti-Vibration Technology

Vibration level at main handle
AVT **6.0 m/s²**


Active dynamic vibration absorber moves in the opposite direction to the drive piston to reduce vibration.

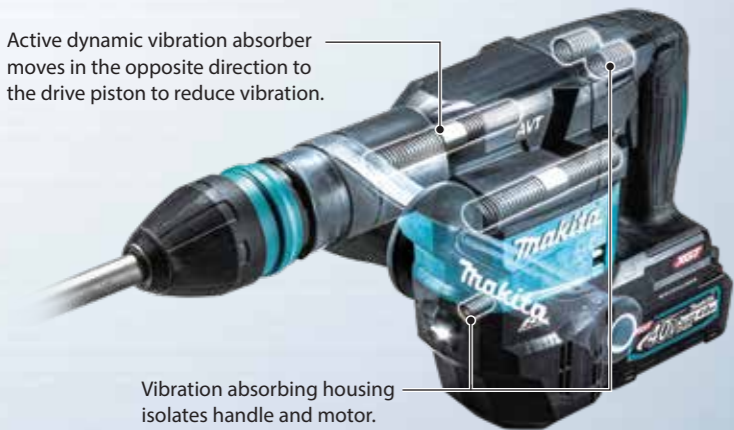

Vibration absorbing housing isolates handle and motor.

SOFT NO LOAD

Suppression of motor speed during no-load

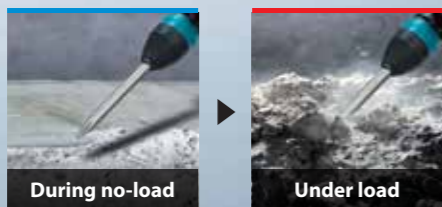

BL MOTOR High power Brushless motor




Work amount
Chipped concrete and measured the amount of concrete removed / Concrete with compressive strength of 40N/mm²
about **20% UP**
with BL4040



AWS Auto-start Wireless System

connects to compatible vacuum cleaner with Bluetooth. The vacuum cleaner automatically runs while the switch is on.

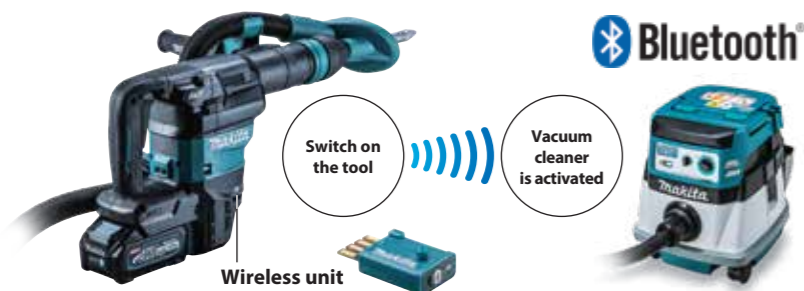

XPT eXtreme Protection Technology



Adapted for SDS-MAX bits
12 bit angle settings



Slide lever for trigger lock-on / lock-off
Trigger lock-on/lock-off can be set simply by pushing the slide lever:
• For lock-on of the trigger, pull and hold the trigger, then push the slide lever.
• For lock-off of the trigger, push the slide lever without pulling the trigger.

5-stage max speed selection by dial with variable control by trigger in each range enables user to match the speed to the application for greater versatility.