


Comparison of Efficiency

Note:

1. The test results depend to a great extent on the hardness of the material, etc.
2. Numbers in the charts below are relative values when the capacities of Competitor "B" model are indexed at 100.
3. Chipped concrete in vertical down application using $\phi 1.5\text{mm}^2 \times 50\text{m}$ cord reel, and measured the amount of concrete removed.

Test material: Concrete with compressive strength of 40N/mm²

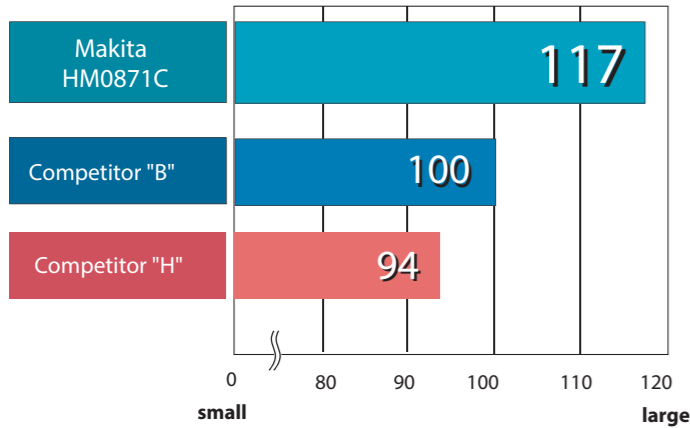


See the Result of AVT

Comparison of Vibration level* and Time to reach ELV (Exposure Limit of Vibration)**

*It is known as the tri-axial value and value at Directive of A(8).

**It means the maximum amount of vibration that an operator may be exposed to on any single day.

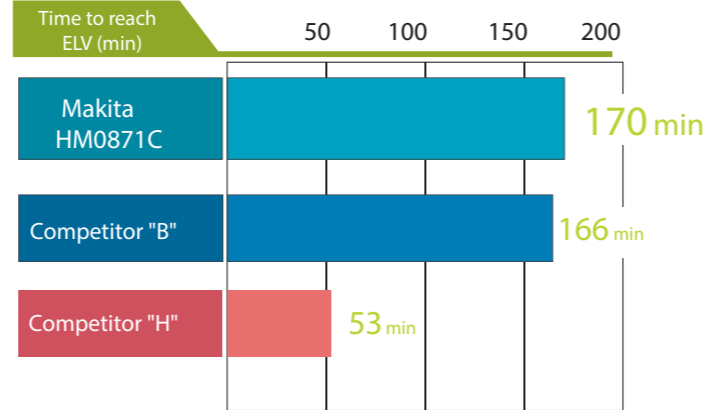

Accessories

Bull point (For demolishing concrete) <table border="1"> <thead> <tr> <th>Length(mm)</th> <th>Type</th> <th>Part No.</th> </tr> </thead> <tbody> <tr> <td>280</td> <td>-</td> <td>A-80787</td> </tr> <tr> <td>400</td> <td>-</td> <td>A-80793</td> </tr> <tr> <td>600</td> <td>-</td> <td>A-87476</td> </tr> </tbody> </table>	Length(mm)	Type	Part No.	280	-	A-80787	400	-	A-80793	600	-	A-87476	Scaling chisel (A wide chisel for chipping away scale of dried concrete spatter) <table border="1"> <thead> <tr> <th>Size(mm)</th> <th>Type</th> <th>Part No.</th> </tr> </thead> <tbody> <tr> <td>50 x 400</td> <td>-</td> <td>A-80824</td> </tr> </tbody> </table>	Size(mm)	Type	Part No.	50 x 400	-	A-80824	Rammer (For tamping) * Use with shank (A-19897) <table border="1"> <thead> <tr> <th>Dia. (mm)</th> <th>Type</th> <th>Part No.</th> </tr> </thead> <tbody> <tr> <td>140</td> <td>-</td> <td>A-19875</td> </tr> </tbody> </table>	Dia. (mm)	Type	Part No.	140	-	A-19875
Length(mm)	Type	Part No.																								
280	-	A-80787																								
400	-	A-80793																								
600	-	A-87476																								
Size(mm)	Type	Part No.																								
50 x 400	-	A-80824																								
Dia. (mm)	Type	Part No.																								
140	-	A-19875																								
Self-Sharpening Bull Point <table border="1"> <thead> <tr> <th>Length(mm)</th> <th>Type</th> <th>Part No.</th> </tr> </thead> <tbody> <tr> <td>400</td> <td>-</td> <td>B-10621</td> </tr> </tbody> </table>	Length(mm)	Type	Part No.	400	-	B-10621	Scaling chisel (for Tile) These items are available on request. Contact us for the minimum order quantity. <table border="1"> <thead> <tr> <th>Size(mm)</th> <th>Type</th> <th>Part No.</th> </tr> </thead> <tbody> <tr> <td>50 x 300</td> <td>-</td> <td>A-80830</td> </tr> </tbody> </table>	Size(mm)	Type	Part No.	50 x 300	-	A-80830	Grease vessel set 100ml (for bit) <table border="1"> <thead> <tr> <th>Part No.</th> </tr> </thead> <tbody> <tr> <td>194683-7</td> </tr> </tbody> </table>	Part No.	194683-7										
Length(mm)	Type	Part No.																								
400	-	B-10621																								
Size(mm)	Type	Part No.																								
50 x 300	-	A-80830																								
Part No.																										
194683-7																										
Cold chisel (For chipping, edging, channeling and breaking away larger chunks of concrete) <table border="1"> <thead> <tr> <th>Size(mm)</th> <th>Type</th> <th>Part No.</th> </tr> </thead> <tbody> <tr> <td>25 x 280</td> <td>-</td> <td>A-80802</td> </tr> <tr> <td>25 x 400</td> <td>-</td> <td>A-80818</td> </tr> <tr> <td>24 x 600</td> <td>-</td> <td>A-87482</td> </tr> </tbody> </table>	Size(mm)	Type	Part No.	25 x 280	-	A-80802	25 x 400	-	A-80818	24 x 600	-	A-87482	Clay spade <table border="1"> <thead> <tr> <th>Size(mm)</th> <th>Type</th> <th>Part No.</th> </tr> </thead> <tbody> <tr> <td>105 x 400</td> <td>-</td> <td>A-17653</td> </tr> </tbody> </table>	Size(mm)	Type	Part No.	105 x 400	-	A-17653	Side handle assembly (Grip assembly) <table border="1"> <thead> <tr> <th>Type</th> <th>Part No.</th> </tr> </thead> <tbody> <tr> <td>D shaped</td> <td>134909-5</td> </tr> <tr> <td>Bar style</td> <td>135332-7</td> </tr> </tbody> </table>	Type	Part No.	D shaped	134909-5	Bar style	135332-7
Size(mm)	Type	Part No.																								
25 x 280	-	A-80802																								
25 x 400	-	A-80818																								
24 x 600	-	A-87482																								
Size(mm)	Type	Part No.																								
105 x 400	-	A-17653																								
Type	Part No.																									
D shaped	134909-5																									
Bar style	135332-7																									
Bushing tool (For concrete surface removal) <table border="1"> <thead> <tr> <th>Size(mm)</th> <th>Type</th> <th>Part No.</th> </tr> </thead> <tbody> <tr> <td>67 x 67</td> <td>-</td> <td>A-19881</td> </tr> </tbody> </table>	Size(mm)	Type	Part No.	67 x 67	-	A-19881	Carrying case <table border="1"> <thead> <tr> <th>Part No.</th> </tr> </thead> <tbody> <tr> <td>824904-0 (with AVT)</td> </tr> <tr> <td>824905-8</td> </tr> </tbody> </table>	Part No.	824904-0 (with AVT)	824905-8																
Size(mm)	Type	Part No.																								
67 x 67	-	A-19881																								
Part No.																										
824904-0 (with AVT)																										
824905-8																										

Demolition Hammer	HM0871C / HM0870C	Adapted for SDS-MAX bits	350																																	
 <ul style="list-style-type: none"> Double Insulation Variable Speed Constant Speed Soft Start SDS-MAX Shank Carrying Case 	 Photo: HM0871C Photo: HM0870C	<table border="1"> <thead> <tr> <th></th> <th>HM0871C</th> <th>HM0870C</th> </tr> </thead> <tbody> <tr> <td>Continuous rating input</td> <td>1,100W</td> <td>1,100W</td> </tr> <tr> <td>Impact Energy</td> <td>EPTA-Procedure 05/2009: 8.1 J</td> <td>EPTA-Procedure 05/2009: 7.6 J</td> </tr> <tr> <td></td> <td>Our experimental conditions: 11.6 J</td> <td>Our experimental conditions: 11.4 J</td> </tr> <tr> <td>Impacts Per Minute (ipm)</td> <td>1,100-2,650</td> <td>1,100-2,650</td> </tr> <tr> <td>Sound Pressure Level</td> <td>86 dB(A)</td> <td>87 dB(A)</td> </tr> <tr> <td>Sound Power Level</td> <td>97 dB(A)</td> <td>98 dB(A)</td> </tr> <tr> <td>Vibration Level</td> <td>Chiseling: 8 m/s²</td> <td>Chiseling: 11.5 m/s²</td> </tr> <tr> <td>Dimensions (L x W x H)</td> <td>466x116x230mm (18-3/8"x4-9/16"x9")</td> <td>449x109x230mm (17-3/4"x4-1/4"x9")</td> </tr> <tr> <td>Net weight</td> <td>5.6kg (12.4lbs)</td> <td>5.1kg (11.1lbs)</td> </tr> <tr> <td>Power supply cord</td> <td>5.0m (16.4ft)</td> <td>5.0m (16.4ft)</td> </tr> </tbody> </table>		HM0871C	HM0870C	Continuous rating input	1,100W	1,100W	Impact Energy	EPTA-Procedure 05/2009: 8.1 J	EPTA-Procedure 05/2009: 7.6 J		Our experimental conditions: 11.6 J	Our experimental conditions: 11.4 J	Impacts Per Minute (ipm)	1,100-2,650	1,100-2,650	Sound Pressure Level	86 dB(A)	87 dB(A)	Sound Power Level	97 dB(A)	98 dB(A)	Vibration Level	Chiseling: 8 m/s ²	Chiseling: 11.5 m/s ²	Dimensions (L x W x H)	466x116x230mm (18-3/8"x4-9/16"x9")	449x109x230mm (17-3/4"x4-1/4"x9")	Net weight	5.6kg (12.4lbs)	5.1kg (11.1lbs)	Power supply cord	5.0m (16.4ft)	5.0m (16.4ft)	
	HM0871C	HM0870C																																		
Continuous rating input	1,100W	1,100W																																		
Impact Energy	EPTA-Procedure 05/2009: 8.1 J	EPTA-Procedure 05/2009: 7.6 J																																		
	Our experimental conditions: 11.6 J	Our experimental conditions: 11.4 J																																		
Impacts Per Minute (ipm)	1,100-2,650	1,100-2,650																																		
Sound Pressure Level	86 dB(A)	87 dB(A)																																		
Sound Power Level	97 dB(A)	98 dB(A)																																		
Vibration Level	Chiseling: 8 m/s ²	Chiseling: 11.5 m/s ²																																		
Dimensions (L x W x H)	466x116x230mm (18-3/8"x4-9/16"x9")	449x109x230mm (17-3/4"x4-1/4"x9")																																		
Net weight	5.6kg (12.4lbs)	5.1kg (11.1lbs)																																		
Power supply cord	5.0m (16.4ft)	5.0m (16.4ft)																																		

*weight according to EPTA-Procedure 01/2003
Standard Equipment : Bit Grease, Side Handle (Tool does not come with bull point.)

Items of standard equipment and specifications may vary by country or area.




Demolition Hammer
HM0871C/ HM0870C

Satisfy Professional's Needs



Adapted for
SDS-MAX bits

High Efficiency Most Lightweight in its class

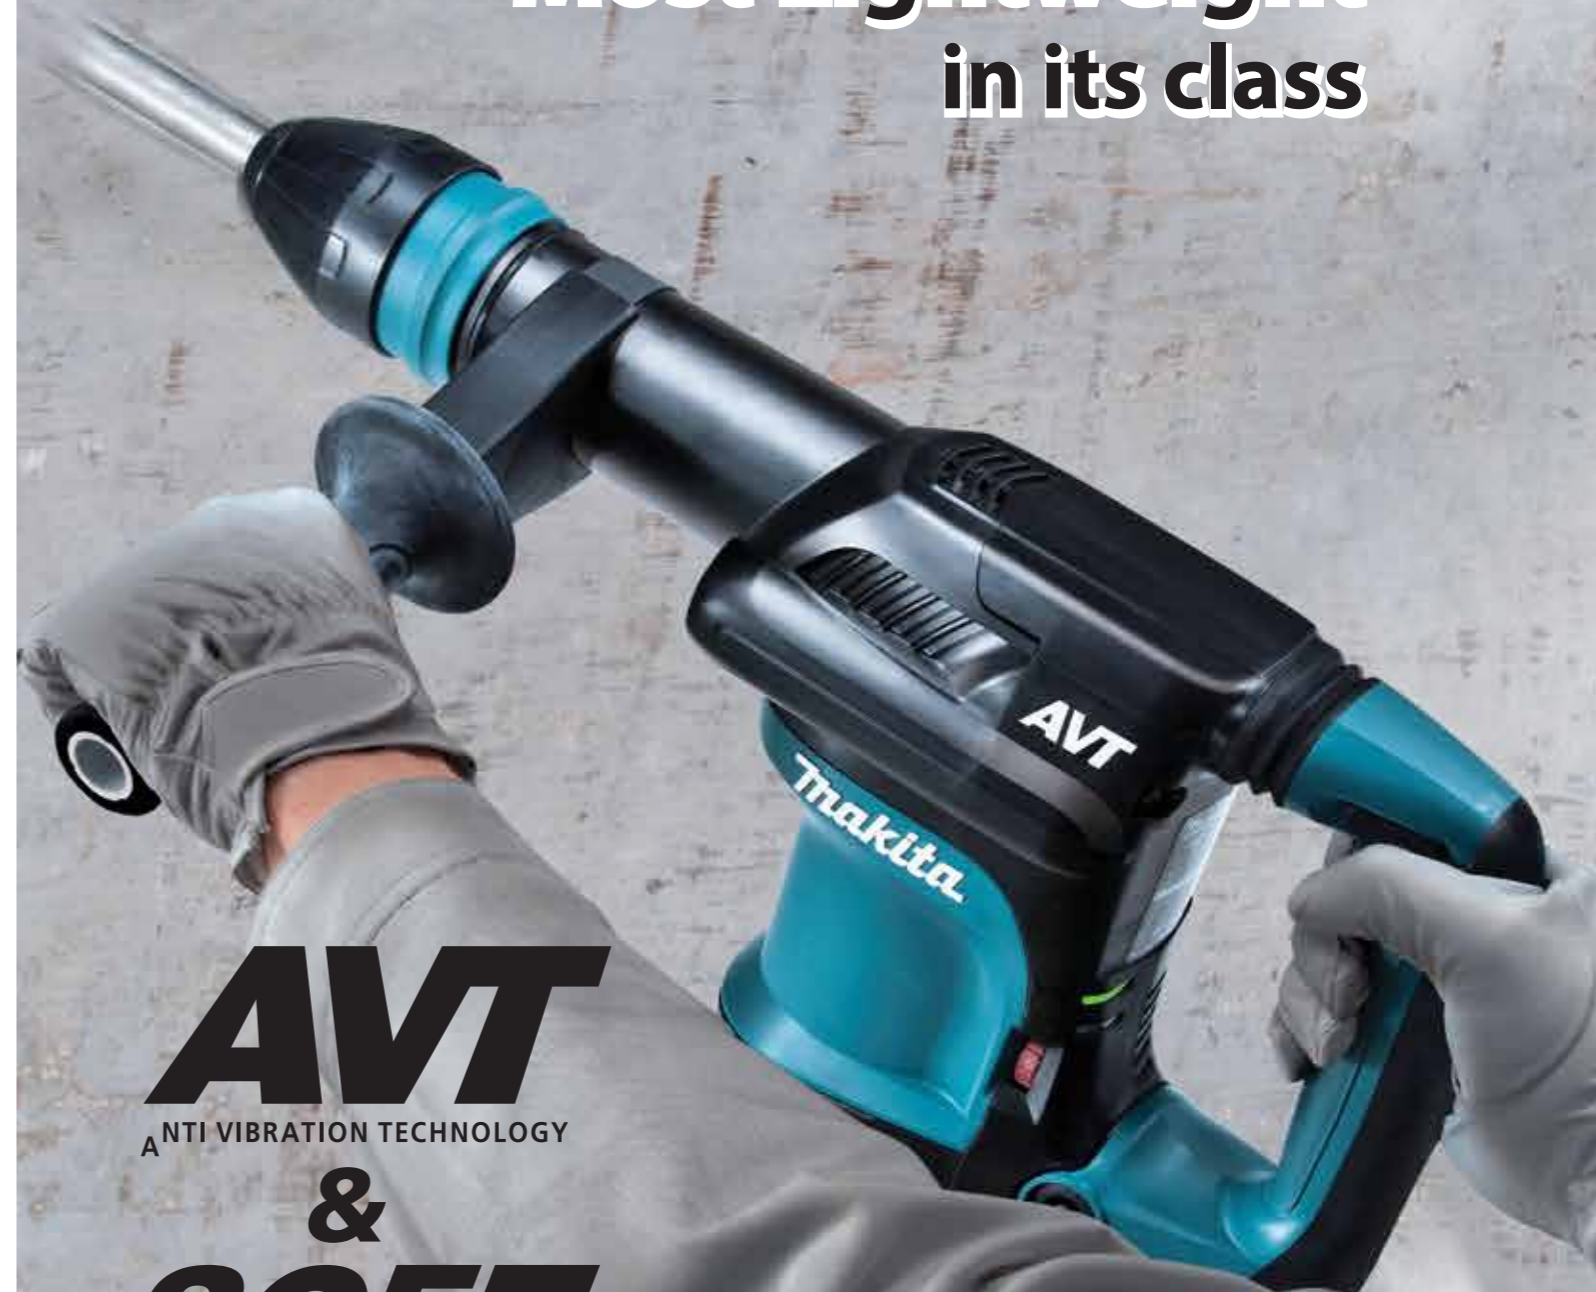

AVT

ANTI VIBRATION TECHNOLOGY

& SOFT NO LOAD

Makita Singapore Pte Ltd

7, Changi South Street 3, Singapore 486348
Phone : +65-6546-8700 Fax : +65-6546-8711
Email : msgproductteam@makita.com.sg
Website : www.makita.com.sg
Facebook : www.facebook.com/MakitaSG



MakitaSG



VISIT OUR WEBSITE



DOWNLOAD LEAFLET

PRINTED IN SINGAPORE

High performance

Superior to the competitors' models in the class



Easy-to-operate slide switch

Rubberized soft grip provides more comfort and control.

Lightweight design achieved by lightening barrel portion for better handling and higher maneuverability.

Easy-to-hold barrel design



Extended service life of carbon brush

One-touch sliding chuck for easy bit changes

Adapted for SDS-MAX bits

12 bit angle settings

Increased repairability obtained by using ingenious Brush holder unit for simplified wiring

Electronic with ;

- Variable speed control by dial
- LED service light that indicates when to replace carbon brush
- LED power light that indicates trouble with the electric circuit
- Soft start for suppressing start-up reaction
- Constant speed control



Photo : HM0871C

Dominate the Job Site

with Makita's Low Vibration Demolition Hammer


Under load

Anti Vibration Technology (HM0871C only)




A Active dynamic vibration absorber

Shift of air pressure in crank room and barrel room "actively" controls balancer to move opposite of piston.

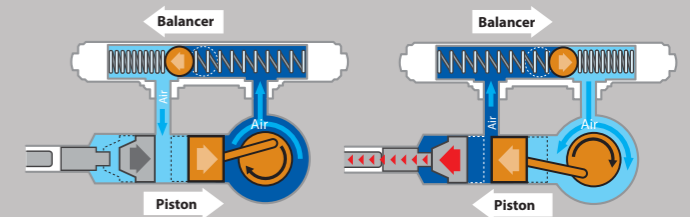

B Vibration Absorbing Grip

Spring loaded hinged grip absorbs vibration.



AVT
ANTI VIBRATION TECHNOLOGY

ALWAYS
low Vibration

HM0871C only

During no-load

SOFT NO LOAD Suppression of motor speed

- reduces vibration of tool body when idling, accordingly decreases the amount of vibration to operator's hands during a day's operation.

- minimizes deflection of bit tip from aiming point when starting chipping.

