



**Cordless Rotary Hammer**  
**HR005G** 40 mm (1-9/16") Adapted for SDS-Max bits

**High Power**  
**Durability**  
**Digital Communication**



LED Flashlight  
ML001G

LED Worklight  
ML002G

Fan  
CF001G

Recipro Saw  
JR001G

Slide Compound Miter Saw  
LS002G

Circular Saw  
HS003G / HS004G

Impact Driver  
TD001G

Impact Wrench  
TW001G  
TW004G

Driver Drill  
DF001G / DF002G

Hammer Driver Drill  
HP001G / HP002G

Angle Grinder  
GA003G - GA038G  
28 models

Combination Hammer  
HR001G / HR002G /  
HR003G / HR004G

Rotary Hammer  
HR005G

Demolition Hammer  
HM001G

Rotary Hammer  
HR006G

Demolition Hammer  
HM002G



Impact energy  
[EPTA-Procedure 05/2009]  
**8.0**  
Joule

**Portable Power Pack**

**PDC01**

Powered by up to four 18V LXT batteries



**PDC1200**

Equipped with built-in battery cells



Charger:  
DC4001  
(191L01-2)

Charging time:  
6hours

**Adapter set  
(40Vmax)**

Part No. 191N62-4




**Accessories**

**Dust Extractor Attachment Set**

**Drilling / Hammering**

Part No. 196536-6

**Drilling mode**



**Hammering mode**



**Hammering**

with Vacuum hose set  
Part No. 196571-4



**Cordless Rotary Hammer**

**HR005G** 40 mm (1-9/16") Adapted for SDS-Max bits

Variable Speed	<b>Impact Energy</b>	EPTA-Procedure 05/2009: 8 J
Brake	<b>Capacity</b>	Concrete (w/ TCT Bit): 40 mm (1-9/16")
SDS-MAX Shank	<b>Blows Per Minute (BPM)</b>	1,450 - 2,900
Torque Limiter	<b>No Load Speed (RPM)</b>	250 - 500
Constant Speed	<b>Sound Pressure Level</b>	91 dB(A)
Soft Start	<b>Sound Power Level</b>	102 dB(A)
Dust Collection	<b>Vibration Level</b>	Hammer Drilling into Concrete: 5.0 m/s <sup>2</sup> Chiselling Function w/ Side Grip: 4.0 m/s <sup>2</sup> Chiselling Function w/ Side Handle: 4.0 m/s <sup>2</sup>
Built-in Job Light	<b>Dimensions (L x W x H)</b>	w/o Battery: 477 x 115 x 286 mm (18-3/4 x 4-1/2 x 11-1/4") w/ BL4040: 500 x 115 x 286 mm (19-3/4 x 4-1/2 x 11-1/4") w/ BL4050F: 520 x 115 x 305 mm (20-1/2 x 4-1/2 x 12")
Carrying Case	<b>Net weight</b>	7.4 - 8.2 kg (17.0 - 18.1 lbs.)
	<b>Standard Equipment:</b>	Side Handle, Side Grip, Depth Gauge, Bit Grease, Cloth, Wireless Unit (country-specific), Wireless Unit Adapter (country-specific), Battery, Charger

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table. Items of standard equipment and specifications may vary by country or area.

**As powerful  
as AC tools**

**Net weight**

**7.7 kg**

with BL4040



**Makita Singapore Pte Ltd**

7, Changi South Street 3, Singapore 486348  
Phone : +65-6546-8700 Fax : +65-6546-8711  
Email : msgproductteam@makita.com.sg  
Website : www.makita.com.sg  
Facebook : www.facebook.com/MakitaSG



MakitaSG



VISIT OUR WEBSITE




DOWNLOAD LEAFLET

PRINTED IN SINGAPORE



Impact energy  
[EPTA-Procedure 05/2009]  
**8.0**  
Joule

diameter 32mm (1-1/4") / Drilled holes to a depth of 140 mm / Concrete with compressive strength of 40N/mm<sup>2</sup>

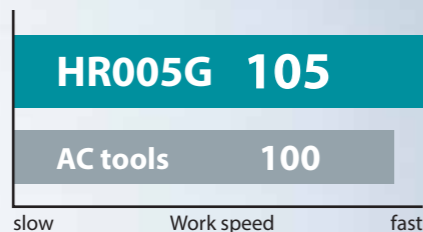

## Anti-Vibration Technology

**AVT** Vibration level at main handle  
**5.0 m/s<sup>2</sup>**

Active dynamic vibration absorber moves in the opposite direction to the drive piston to reduce vibration.



**SOFT NO LOAD**




## AFT Active Feedback sensing Technology

turns the motor off if bit rotation is suddenly forced to stop.



## AWS Auto-start Wireless System

connects to compatible vacuum cleaner with Bluetooth. The vacuum cleaner automatically runs while the switch is on.

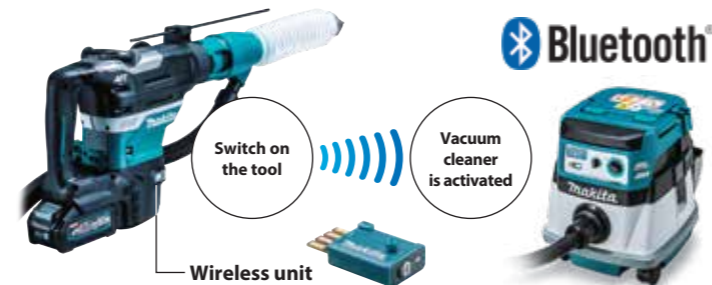

## XPT eXtreme Protection Technology

Technology



Type

Side grip



Side handle



**BL MOTOR**