


High Power
Durability
Digital
Communication



Cordless Recipro Saw Series

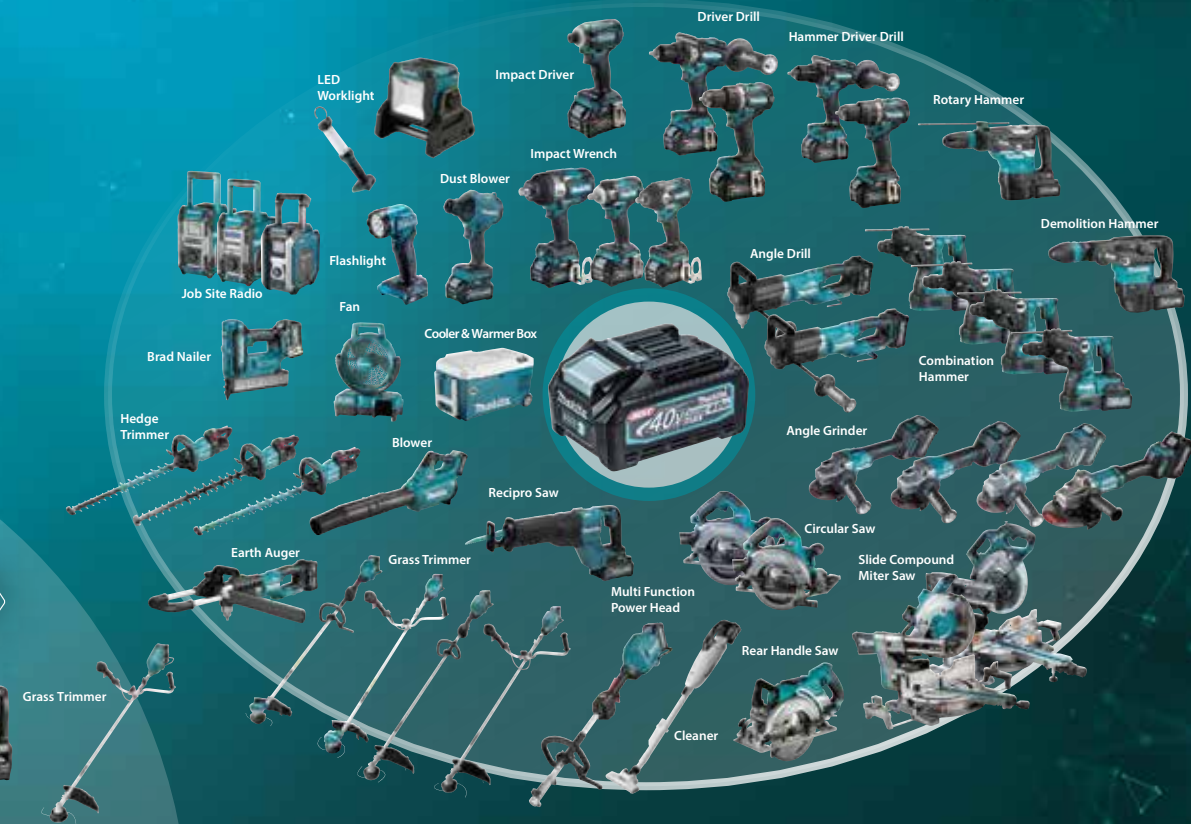

JR001G
Toolless blade change



JR001G
Length of Stroke: 32 mm (1-1/4")
Strokes Per Minute (SPM): 0 - 3,000
Capacity: Pipe / Wood: 130 / 255 mm (5-1/8" / 10")



DJR360
Toolless blade change



DJR360
Length of Stroke: 32 mm (1-1/4")
Strokes Per Minute (SPM): 0 - 3,000
Capacity: Pipe / Wood: 130 / 255 mm (5-1/8" / 10")



DJR187
Toolless blade change



DJR187
Length of Stroke: 32 mm (1-1/4")
Strokes Per Minute (SPM): High / Low: 0 - 3,000 / 0 - 2,300
Capacity: Pipe / Wood: 130 / 255 mm (5-1/8" / 10")



DJR188
Toolless blade change



DJR188
Length of Stroke: 20 mm (13/16")
Strokes Per Minute (SPM): 0 - 3,000
Capacity: Pipe / Wood: 130 / 255 mm (5-1/8" / 10")



DJR183
Toolless blade change



DJR183
Length of Stroke: 13 mm (1/2")
Strokes Per Minute (SPM): 0 - 3,000
Capacity: Pipe / Wood: 50 / 50 mm (2 / 2")

Charging Time

	Fast Charging DC40RA	DC40RC
BL4020 2.0Ah 191L29-0	22 min	30 min
BL4025 2.5Ah 191B36-3	28 min	38 min
*BL4040 4.0Ah 191B26-6	45 min	67 min
*BL4050F 5.0Ah 191L47-8	50 min	85 min
*BL4080F 8.0Ah	76 min	170 min

*1 Recommended battery

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table.
Items of standard equipment and specifications may vary by country or area.

Cordless Recipro Saw

	JR002G
Variable Speed	Length of Stroke: 32 mm (1-1/4")
Brake	Strokes Per Minute (SPM): 0 - 3,000
Torque Limiter	Capacity: Pipe / Wood: 130 / 255 mm (5-1/8" / 10")
Orbital Cutting	Vibration Level: Cutting Wooden Beams: 7.9 m/s ²
Built-in Job Light	Sound Pressure Level: 87 dB(A)
Carrying Case	Sound Power Level: 98 dB(A)
	Dimensions (L x W x H): w/ BL4020 / BL4025: 436 x 97 x 250 mm (17-1/8 x 3-13/16 x 9-7/8")
	w/ BL4040: 451 x 97 x 256 mm (17-3/4 x 3-13/16 x 10-1/8")
	w/ BL4050F: 470 x 97 x 277 mm (18-1/2 x 3-13/16 x 10-7/8")
	w/ BL4080F: 471 x 97 x 296 mm (18-1/2 x 3-13/16 x 11-5/8")
	Net weight: 4.6 - 5.8 kg (10.1 - 12.8 lbs.)
Standard Equipment: Recipro Saw Blades, Charger, Battery	



Cordless Recipro Saw
JR002G



High cutting efficiency



Efficiency of
Wood Cutting
about **30 %**
UP
Comparison with
Predecessor Model

Efficiency of
Metal Cutting
about **35 %**
UP
Comparison with
Predecessor Model

[Test material: LVL 14" x 1-3/4"]

[Carbon steel pipe (25A)]

Makita Singapore Pte Ltd

7, Changi South Street 3, Singapore 486348
Phone : +65-6546-8700 Fax : +65-6546-8711
Email : msgproductteam@makita.com.sg
Website : www.makita.com.sg
Facebook : www.facebook.com/MakitaSG



MakitaSG



VISIT OUR WEBSITE



DOWNLOAD LEAFLET

PRINTED IN SINGAPORE

Anti-Vibration Technology

Extra-Low Vibration achieved
by Counter Weight Mechanism



Redesigned lubricating
mechanism of slider section

**BL
MOTOR**
High power Brushless motor


Blade ejection lever

relocated to the side of the housing for
increased convenience in removing the blade.



Orbital mechanism

For high speed wood cutting

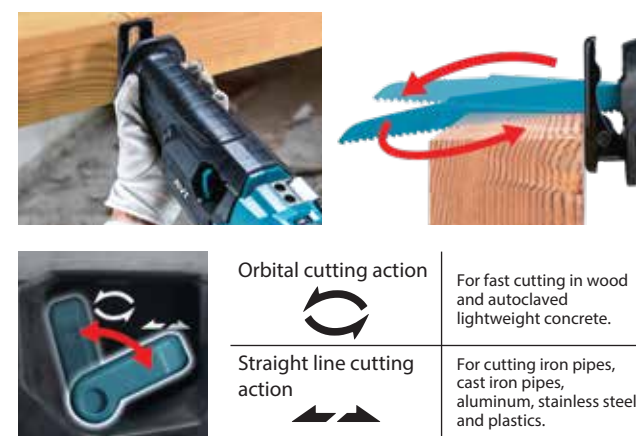

Compatible with a wide range of cutting applications



Efficiency of
Wood Cutting
about **30% UP**
Comparison with
Predecessor Model

[Test material: LVL 14" x 1-3/4"]

Efficiency of
Metal Cutting
about **35% UP**
Comparison with
Predecessor Model

[Carbon steel pipe (25A)]

Work amount
on a single full battery charge

Efficiency of Wood Cutting
about **30 cuts**
Battery: BL4025
Test material: LVL 14" x 1-3/4"

Efficiency of Metal Cutting
about **55 cuts**
Battery: BL4025
Test material: Carbon steel pipe (25A)

Dual LED job light
with preglow and
afterglow functions



Tool hook



Variable speed control by dial
enables user to adjust the max
cutting strokes to match the
materials of workpiece.



1,000 - 3,000min⁻¹



XPT
eXtreme Protection
Technology

