



Cordless Worklight ML005G 40Vmax / 18V



XGT
40V Li-ION
max

18V
LITHIUM-ION

Max luminous flux
3,600 lm



Continuous run time (approx)
on a full battery charge

High / Medium / Low

3.5 / 7.5 / 15 h

Battery: BL4040

Powered by:



- 40Vmax XGT Li-Ion battery
- 18V LXT Li-Ion battery



Max luminous flux
3,600 lm



3 brightness settings
with memory function that remembers the brightness setting last time you power off.

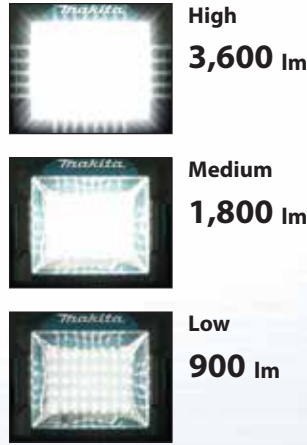

Battery capacity warning function



Automatically notifies the user about a decrease in battery capacity with a reduction in illuminance.

Carrying handle



Compact design with a short height thanks to the retractable carrying handle

Angle adjustment




Knob for free adjustment of light angle enables the light source to rotate from -30° to 210° to a desired angle.

Dust and water resistance (only with DC power)

IP65

For use in outdoor applications or harsh environments



Front: about **6 m**
Side: about **6.4 m**



Distance

Accessories

Lamp shade

Part No. GM00002358

- provides widespread illumination and reduces the glare of LED light.
- reduces multiple shadows.



Anti-glare film

Part No. GM00002359

reduces glare.



Light stand

Part No. GM00002073



Charging Time

	Fast Charging			Fast Charging	
	DC40RA	DC40RC		DC18RC	DC18SD
BL4020 2.0Ah 191L29-0	22 min	30 min	BL1815N 1.5Ah 196449-1	15 min	30 min
*BL4025 2.5Ah 191B36-3	28 min	38 min	BL1820B 2.0Ah 197254-9	24 min	45 min
*BL4040 4.0Ah 191B26-6	45 min	67 min	BL1830B 3.0Ah 197599-5	22 min	60 min
*BL4050F 5.0Ah 191L47-8	50 min	85 min	BL1850B 5.0Ah 197280-8	45 min	110 min
BL4080F 8.0Ah	76 min	170 min	BL1860B 6.0Ah 197422-4	55 min	130 min

*1 Recommended battery

The weight does not include battery cartridge

Items of standard equipment and specifications may vary by country or area.

Cordless Worklight

ML005G

Illuminance (High / Mid / Low)	at 1m from the light source : 2,100 / 1,000 / 500 lx
Luminous Flux	High / Mid / Low: 3,600 / 1,800 / 900 lm
Continuous illumination	High / Mid / Low: 3.5 / 7.5 / 15 h
Dimensions (L x W x H)	w/ Handle in Retracted Position : 248 x 309 x 296 mm (9-3/4 x 12-1/8 x 11-5/8") w/ Handle in Upright Position : 248 x 309 x 423 mm (9-3/4 x 12-1/8 x 16-5/8")
Net weight	4.6 - 6.5 kg (10.1 - 14.3 lbs.)

Standard Equipment : Anti-glare film

Battery & Charger Sold Separately

Makita Singapore Pte Ltd

7, Changi South Street 3, Singapore 486348
Phone : +65-6546-8700 Fax : +65-6546-8711
Email : msgproductteam@makita.com.sg
Website : www.makita.com.sg
Facebook : www.facebook.com/MakitaSG



f MakitaSG



VISIT OUR WEBSITE



DOWNLOAD LEAFLET

PRINTED IN SINGAPORE