


High Power
Durability
Digital
Communication

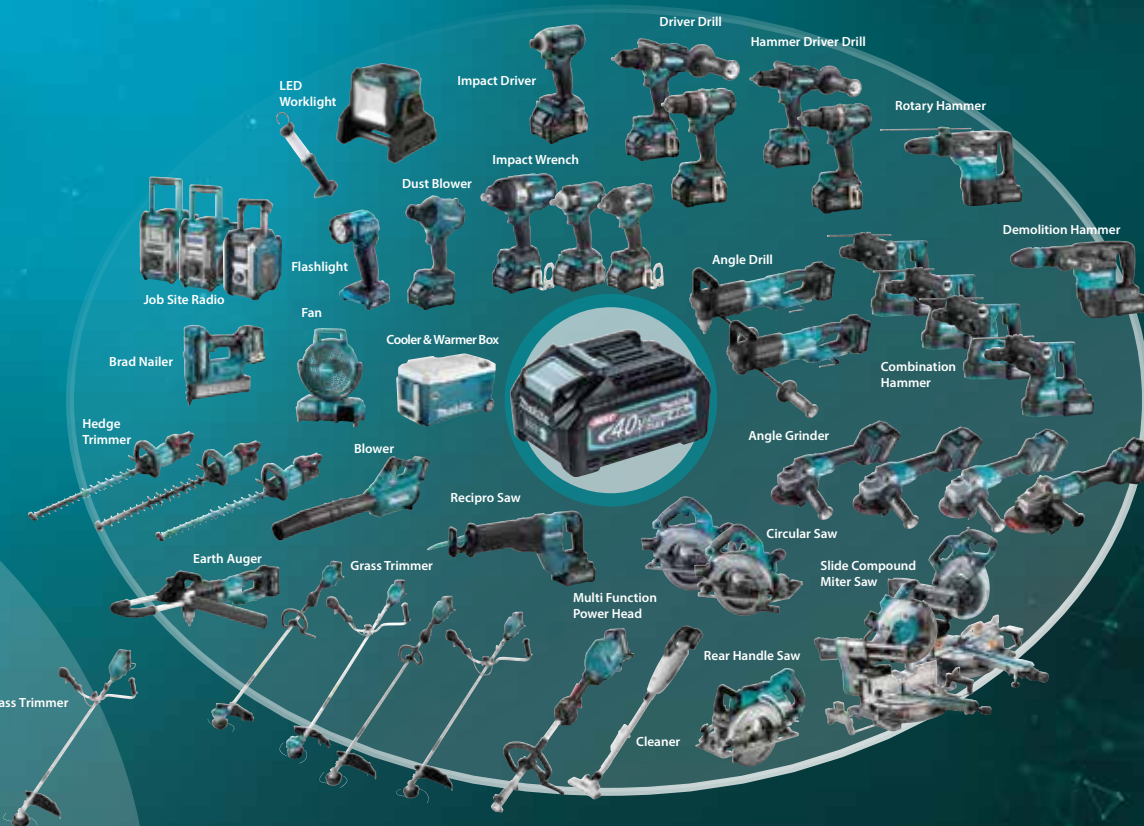

Cordless Pin Nailer
PT001G

XGT

40V^{Li-ion}max

Firing quickness
about **20%**
UP



Work volume
on a single full battery charge
about
6,000 shots
Battery: BL4025

BL MOTOR **XPT**

Cordless Pin Nailer Series

DPT353



PT354D



Accessories

Nose adapter

Part No. 422872-7

Nose adapter for flat nailing



Charging Time

	Fast Charging DC40RA	DC40RC
*1BL4020 2.0Ah 191L29-0	22 min	30 min
*1BL4025 2.5Ah 191B36-3	28 min	38 min
*1BL4040 4.0Ah 191B26-6	45 min	67 min
BL4050F 5.0Ah 191L47-8	50 min	85 min

*1 Recommended battery

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table.
Items of standard equipment and specifications may vary by country or area.

Cordless Pin Nailer

PT001G

Depth Adjustment	Capacity	Length: 15, 18, 25, 30, 35 mm (5/8, 11/16, 1, 1-3/16, 1-3/8") Dia.: 0.6 mm (1/32") Gauge: 23 Ga
Auto Firing Stop	Magazine Capacity	120
Built-in Job Light	Approx. work volume on a full battery charge	6,000
Carrying Case	Vibration Level	2.5 m/s ² or less
	Sound Pressure Level	79 dB(A)
	Dimensions (L x W x H)	w/ BL4020 / BL4025: 265 x 86 x 226 mm (10-3/8 x 3-3/8 x 8-7/8")
	Net weight	2.4 - 3.0 kg (5.3 - 6.6 lbs.)

Standard Equipment : Nose Adapter, Safety Goggles, Belt Clip, Hex Wrench, Battery, Charger

Makita Singapore Pte Ltd

7, Changi South Street 3, Singapore 486348
Phone : +65-6546-8700 Fax : +65-6546-8711
Email : msgproductteam@makita.com.sg
Website : www.makita.com.sg
Facebook : www.facebook.com/MakitaSG



MakitaSG



VISIT OUR WEBSITE



DOWNLOAD LEAFLET

PRINTED IN SINGAPORE

Quick firing thanks to BL motor



BL
MOTOR

Firing quickness

about **20% UP**

Use of BL motor and redesigned driving spring shortens the time required to compress and release the spring, providing drastically quicker firing.

PT001G	120
Predecessor Model 18V	100

slow Firing quickness fast

Beautiful finish

Actual scale




Improved Driver durability

achieved by redesigning the shape of the driver tip and reducing thin places.

PT001G




Predecessor Model



Low recoil mechanism

- enables easier nailing of long pins without pushing down the pin nailer firmly.
- achieves high-quality finish nailing.

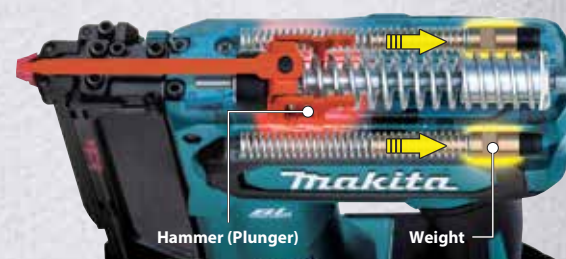

Hammer (Plunger) Weight

Nose tip (with Nose adapter)

thickness **4 mm**



Fires both vertically and horizontally

Nails can be fired in the groove of baseboard.



Work volume
on a single full battery charge

about **6,000** shots

Battery: BL4025

Pin nails

Diameter **Ø0.6 mm**

Length

15/18/25/30/35 mm

Compact & Lightweight

226mm



Net weight
2.4 kg
Battery: BL4025

Contact arm mechanism

enables "continuous nailing" and "drag nailing".
[If the nose tip isn't pressed to a workpiece, the trigger cannot be pulled.]



Ergonomically designed grip



Nose tip designed to provide better visibility

Single LED job light



with pre-glow and after-glow functions

- Able to drive up to 35mm pin nails
- Anti-dry fire mechanism

Driving depth adjustment by dial



XPT



eXtreme Protection Technology