



High power
X
Long reach
||
High efficiency

Accessories

Guide bar / Saw chain / Guide bar cover



Cutter type: CC: Chamfer chisel

Guide Bar				Saw Chain				Bar Cover		Drive sprocket		
Bar length	Motor Mount	Type	Part No.	No. of drive links	Gauge	Pitch	Type OREGON	Cutter type	Part No.	Part No.	Type	Part No.
25cm/10"	A041	Sprocket nose bar	191G14-3	40	1.1mm/.043"	3/8"LP	90PX	CC	191H00-0	458501-6	Sprocket 3/8"LP	226992-7
30cm/12"			191G15-1	46					191H01-8	419288-5		
25cm/10"			191G22-4	40	1.3mm/.050"				191H08-4	458501-6		
30cm/12"			191G23-2	46	191H10-7				419288-5			

Band assembly set Part No. 191K37-5

The weight of the tool can be distributed on shoulders for reduced operator fatigue.



Portable Power Pack

PDC1200

Powered by 36V-40Vmax built-in battery



PDC01

Powered by up to four 18V LXT batteries



Adapter set

Part No. 191N62-4



Charging Time

Battery	Fast Charging	
	DC40RA	DC40RC
*1BL4020 2.0Ah 191L29-0	22 min	30 min
*1BL4025 2.5Ah 191B36-3	28 min	38 min
*1BL4040 4.0Ah 191B26-6	45 min	67 min
BL4050F 5.0Ah 191L47-8	50 min	85 min

*1 Recommended battery

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table. Items of standard equipment and specifications may vary by country or area.

Cordless Pole Saw	UA001G 250 mm (10")	UA002G 250 mm (10")
Variable Speed		
Brake		
Soft Start		
Standard Equipment : Saw Chain, Guide Bar, Blade Cover, Wrench, Band Assembly, Hex Wrench, Battery, Charger		
Guide Bar Length	250 mm (10")	250 mm (10")
Saw chain	Gauge: 1.1 / 1.3 mm (0.043 / 0.050") Pitch: 3/8"	Gauge: 1.1 / 1.3 mm (0.043 / 0.050") Pitch: 3/8"
Chain Speed	0 - 20.0 m/s (0 - 1,200 m/min) (0 - 3,940 FPM)	0 - 20.0 m/s (0 - 1,200 m/min) (0 - 3,940 FPM)
Oil Tank Capacity	160 mL	160 mL
Dimensions (L x W x H) without guide bar and Battery or with Battery BL4040	2,230 x 156 x 187 mm (88 x 6-1/8 x 7-3/8")	2,516 - 3,748 x 156 x 187 mm (99 - 147-1/2 x 6-1/8 x 7-3/8")
with guide bar, Saw chain and Battery BL40450F	2,470 x 156 x 192 mm (97-1/4 x 6-1/8 x 7-9/16")	2,765 - 3,997 x 156 x 192 mm (109 - 157-1/2 x 6-1/8 x 7-9/16")
Net weight	6.0 - 7.2 kg (13.2 - 15.9 lbs.)	7.7 - 8.9 kg (17.0 - 19.6 lbs.)

Makita Singapore Pte Ltd

7, Changi South Street 3, Singapore 486348
Phone : +65-6546-8700 Fax : +65-6546-8711
Email : msgproductteam@makita.com.sg
Website : www.makita.com.sg
Facebook : www.facebook.com/MakitaSG



MakitaSG



VISIT OUR WEBSITE




DOWNLOAD LEAFLET

PRINTED IN SINGAPORE



photo: UA002G

250mm (10")
UA001G Fixed length UA002G Telescopic

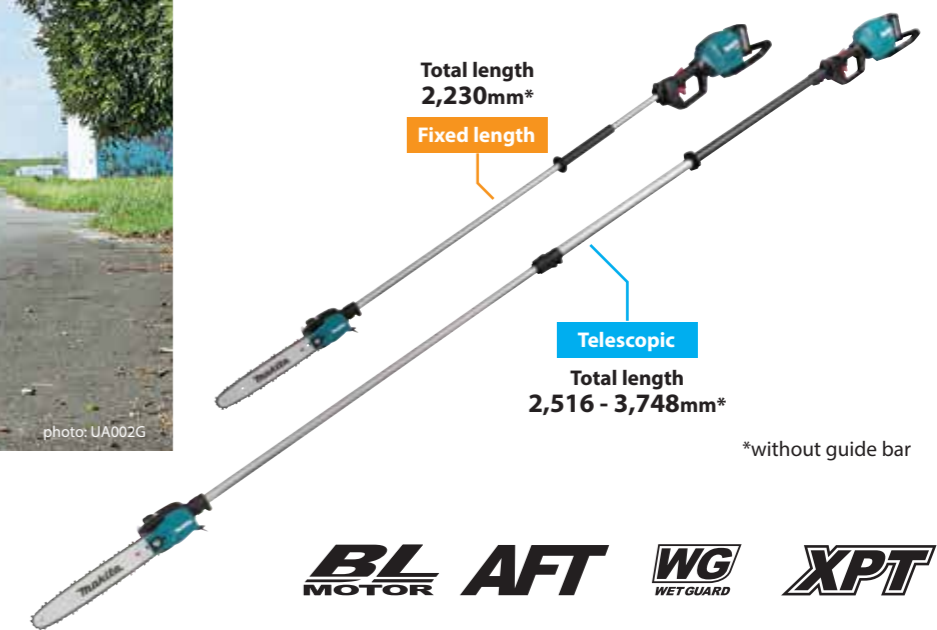

Total length 2,230mm*
Fixed length

Telescopic
Total length 2,516 - 3,748mm*
*without guide bar

No load chain speed
20.0 m/s





***Saw head weight**
0.7kg

Excellent tool balance
The motor is located in the battery housing at the bottom of the tool. This bottom-mounted motor reduces the saw head weight, allowing for:

- Ease to control the saw head for easy access to a desired cutting position
- Reduced user fatigue and stress

*without guide bar, saw chain and oil

Telescopic pole
(UA002G only)
Tool-less pole extension and fixing for easy adjustment of pole length

BL MOTOR **High operating efficiency**
High power BL motor delivers the same or higher operation efficiency than 35mL class engine models.

AFT Active Feedback sensing Technology
Torque limiter turns the motor off if the tool is suddenly forced to lock

Speed vs Time graph showing a sudden reduction of rotational speed and an Auto-Stop button.

Retractable oil tank cap knob
decreases the chance that the saw head will be snagged in branches.

Slim saw head
The same slim design as engine pole saws provides easy maneuverability into branches.

Saw head width
87mm

Chain oil tank with high transparency
allows to easily check the amount of remaining oil.

Integrated branch hook
convenient for removing cut branches from trees

Anti-fall captive nut

Maximum total length
3,748 mm

Shortest total length
2,516 mm

Total length
2,230 mm

Fixed length

Telescopic

250mm (10") UA001G Fixed length

250mm (10") UA002G Telescopic

Battery guard
also can be used as an auxiliary grip.

XPT / WG / IPX4
WET GUARD

High water-resistance
allows to operate the machine even if it is wet with water.

photo: UA002G