



Accessories

Adapter pipe 85-72 set

Part No. 191L96-5



Flat nozzle set

Part No. 197889-6
Narrow profile improves air speed for removing heavier debris such as wet leaves

Gutter nozzle set

Part No. 191B03-8



Band assembly set

Part No. 191J48-4



Portable Power Pack

Portable Power Pack

PDC1200

Charger
DC4001
Charging time:
6 hours

Battery Powered

Blower
UB001CLawn mower
LM001CGrass Trimmer
UR101C
UR201C
UR202C

Adapter set

40Vmax

Part No.
191N62-4Adapter between
Battery box of Portable
power pack and
Product on 40Vmax
XGT platform

18Vx2

Part No.
191J51-5Adapter between
Battery box of Portable
power pack and
Product on 18Vx2 LXT
platform

18V

Part No.
191J50-7Adapter between
Battery box of Portable
power pack and Product
on 18V LXT platform
*PDC01 only

PDC01

Powered by up to
four 18V LXT
batteries

Battery Powered Blower

UB001C

- Variable Speed
- Constant Speed

Standard Equipment:

Shoulder Belt, End Nozzle,
Flat Nozzle (country-specific),
Extension Nozzle
(country-specific), Adapter
Pipe (country-specific)

Max Air Volume	Cruise Control Mode: 0 - 15.0 m ³ /min Boost Mode: 17.6 m ³ /min
Max Air Velocity	Cruise Control Mode: 0 - 60 m/s Boost Mode: 70
Avg. Air Velocity	Cruise Control Mode: 0 - 50 m/s Boost Mode: 58
Blowing Force	Cruise Control Mode: 0 - 15.0 Boost Mode: 20.0
No Load Speed (RPM)	Cruise Control Mode: 0 - 21,000 Boost Mode: 24,000
Sound Pressure Level	83.4 dB(A)
Sound Power Level	91.4 dB(A)
Vibration Level	2.5 m/s ² or less
Dimensions (L x W x H)	960 - 1,060 x 295 x 180 mm (37-3/4 - 41-3/4 x 11-1/2 x 7")
Net weight	2.6 - 2.9 kg (5.7 - 6.5 lbs.)

Weight according to EPTA-Procedure 01/2014

Items of standard equipment and specifications may vary by country or area.

Makita Singapore Pte Ltd

7, Changi South Street 3, Singapore 486348
Phone : +65-6546-8700 Fax : +65-6546-8711
Email : msgproductteam@makita.com.sg
Website : www.makita.com.sg
Facebook : www.facebook.com/MakitaSG

MakitaSG



VISIT OUR WEBSITE



DOWNLOAD LEAFLET

PRINTED IN SINGAPORE



Battery Powered Blower UB001C Portable Power Pack PDC1200 / PDC01

Ideal for long hours of work

Continuous run time (approx)
on a full battery charge
with PDC1200

90 min

Variable speed control mode: 0-max



UB001C

Powerful blowing force

Max 20 N*

*Boost mode



UB001C



UB001C / PDC1200



1,200Wh high capacity

Portable Power Pack
PDC1200

Height-adjustable waist belt

The position of the waist belt can be adjusted for personal fit and comfort.



Quickly removable harness

can be attached/removed from the main unit with a single action.



Reflectors

keep operator visible from a distance even in the dark.



4-LED fuel gauge

indicates the battery status by four green LEDs. (turns on with a push of the main power switch.)

Low noise level

Smoother airflow, which is achieved by redesigning the position of controller and the air intake port, decreases noise while increasing blowing force.

BL MOTOR



Variable speed control by trigger, with Cruise control lever



Cruise control lever allows you to lock the variable speed control trigger at a desired power level.

Best grip-to-frame angle

Stand

Hole on the bottom of housing for hanging

Battery Powered Blower
UB001C

Boost mode



- In Boost mode, 20N max blowing force is always available.
- Usage time of Boost mode is restricted to protect the machine. Available operation time in boost mode, under environment temperature of 25°C

Battery	Available operation time	
	Time per run*1	Cumulative operation time*2
PDC1200	5 min	60 min
PDC01 (BL1860Bx4)	5 min	17 min

*1 Max time per run is at least 30 seconds or longer and depends on usage environment.
*2 Total operation time when the machine was intermittently used in Boost mode only.



Portable Power Pack
PDC01

Backpack harness

can be detached from the battery box, allowing for use as a stationary power pack.

Battery cover protects batteries from water and dust.

Fuel gauge for each battery

indicates the battery status by two green lamps.

Main power switch with auto-off function

Height-adjustable waist belt


The position of the waist belt can be adjusted for personal fit and comfort.

Powered by up to four 18V LXT batteries



Less user fatigue as well as more powerful air flow

Nozzle is designed so that its end points downward. This small change can displace the reaction force towards the handle side to minimize the return tilting action of the machine, reducing user's arm fatigue.

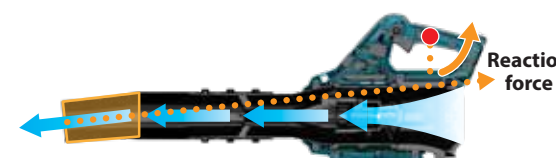

36V high power drive system using the Makita portable power pack

Up to four batteries can be carried on user's back, enabling long continuous operation while providing more lightweight tool body.

3-stage telescopic long nozzle with an adjustment range of 100mm (4")



WG
WET GUARD

UB001C / PDC1200 only
High water-resistance allows to operate the machine even if it is wet with water.

