

## Accessories

### Guide bar / Saw chain / Guide bar cover / File diameter / Drive sprocket

\*Micro-Lite  
\*\*Speedcut Nano



Cutter type:  
MC: Micro chisel,  
CC: Chamfer chisel



Drive sprocket




Guide bar		Saw chain						Bar cover Part No.	Round file diameter	Drive sprocket	
Bar length	Part No. Sprocket nose bar	No.of drive links	Gauge	Pitch	Cutter type		Saw chain Part No.			Pitch/ No. of teeth	Part No.
30cm/12"	*191G15-1	46	1.1mm/.043"	3/8"	90PX	CC	191H01-8	419288-5	4.5mm	3/8" / 6	191V90-7
30cm/12"	191G23-2	46	1.3mm/.050"	3/8"	91PX	CC	191H10-7	419288-5	4.0mm	3/8" / 6	191V90-7
30cm/12"	**191T86-6	51	1.1mm/.043"	.325	80TXL	MC	191T90-5	419288-5	4.0mm	.325 / 7	191V91-5
35cm/14"	195246-6	52	1.1mm/.043"	3/8"	90PX	CC	191H02-6	419288-5	4.5mm	3/8" / 6	191V90-7
35cm/14"	191G24-0	52	1.3mm/.050"	3/8"	91PX	CC	191H11-5	419288-5	4.0mm	3/8" / 6	191V90-7
35cm/14"	**191T87-4	59	1.1mm/.043"	.325	80TXL	MC	191T91-3	419288-5	4.0mm	.325 / 7	191V91-5
40cm/16"	*191G17-7	56	1.1mm/.043"	3/8"	90PX	CC	191H03-4	419242-9	4.5mm	3/8" / 6	191V90-7
40cm/16"	191G25-8	56	1.3mm/.050"	3/8"	91PX	CC	191H12-3	419242-9	4.0mm	3/8" / 6	191V90-7
40cm/16"	**191T88-2	64	1.1mm/.043"	.325	80TXL	MC	191T92-1	419242-9	4.0mm	.325 / 7	191V91-5
45cm/18"	191G26-6	62	1.3mm/.050"	3/8"	91PX	CC	191H13-1	419242-9	4.0mm	3/8" / 6	191V90-7

### Round file and File holder

The file can be guided more easily if a file holder is employed. The file holder has markings for the correct sharpening angle of 30° (align the markings parallel to the saw chain) and limits the depth of penetration (to 4/5 of the file diameter).



Size	Saw chain type	Round file		Round file and File holder
		Q'ty	Part No.	
4mm	91PX, 80TXL	1	953 003 090	D-70948
		12	D-67365	
4.5mm	90PX	1	953 003 100	195923-6



### Chain oil & BIOTOP Chain oil

Chain oil		BIOTOP Chain oil	
Size	Part No.	Size	Part No.
100ml	182229-1	1L	980 008 610
1L	988 002 656		

### Flat file




Q'ty	Part No.
1	953 003 060

### File handle

For flat file and round file



Q'ty	Part No.
1	953 004 010




### Depth gauge jointer

After sharpening the chain, check the height of the depth gauge using the chain gauge tool.



Part No.
D-70998



## Charging Time

	Fast Charging DC40RA	DC40RC
<b>BL4040</b> 4.0Ah 191B26-6	<b>45 min</b>	<b>67 min</b>
<b>*BL4050F</b> 5.0Ah 191L47-8	<b>50 min</b>	<b>85 min</b>
<b>*BL4080F</b> 8.0Ah	<b>76 min</b>	<b>170 min</b>

\*1 Recommended battery

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table.  
Items of standard equipment and specifications may vary by country or area.

## Cordless Chain Saw

### UC012G (Captive nuts type) 400mm (16")

### UC014G/ UC015G (Tool-less chain adjustment type) 300mm (12")/ 350mm (14")

Variable Speed	Guide Bar Length UC012G: 400 mm (16"), UC014G: 300 mm (12"), UC015G: 350 mm (14")
Brake	Chain Pitch / Chain Gauge 3/8" 1.1 for 1.3 mm (.043" or .050"), 0.325" 1.1 mm (.043")
Automatic Oiling	Chain Speed 0-25.5 m/s (0-1,530 m/min)
Chain Brake	Chain Oil Tank Volume 260 mL
	Sound Power Level 104dB(A)
	Vibration Level (Front/ Rear) 3.4/ 4.4 m/s <sup>2</sup> (saw chain: 90PX)
	Dimensions (L x W x H) UC012G w/o guide bar: 445 x 230 x 275 mm (17-1/2 x 9 x 10-7/8")
	UC014G, UC015G w/o guide bar: 445 x 234 x 275 mm (17-1/2 x 9-1/4 x 10-7/8")
	UC012G: 801 mm (31-1/2"), UC014G: 708 mm (27-7/8"), UC015G: 765 mm (30-1/8")
	Overall length (Saw chain with 90PX)
	Net weight UC012G: 6.1 - 7.4kg (13.4 - 16.3lbs.), UC014G, UC015G: 6.2 - 7.5kg (13.7 - 16.5lbs.)

#### Standard Equipment :

Saw chain, Guide bar, Guide Bar Cover, Chain oil (country-specific), Round file (country-specific), Wrench, Battery, Charger, Safety goggles (country-specific)



## Cordless Chain Saw UC012G / UC014G / UC015G



**40V<sup>Li-ion</sup>max**



photo: UC012G

### Captive nuts type

UC012G: 400mm (16")

photo: UC012G



### Tool-less chain adjustment type

UC014G: 300mm (12")

UC015G: 350mm (14")

photo: UC014G



Net weight (tool only)

**4.5 kg**

Max Chain Speed

**25.5 m/s**

## Makita Singapore Pte Ltd

7, Changi South Street 3, Singapore 486348  
Phone : +65-6546-8700 Fax : +65-6546-8711  
Email : msgproductteam@makita.com.sg  
Website : www.makita.com.sg  
Facebook : www.facebook.com/MakitaSG



VISIT OUR WEBSITE



DOWNLOAD LEAFLET

PRINTED IN SINGAPORE






## BL MOTOR

Outer Rotor Brushless Motor  
direct-drive system provides  
high operating efficiency.

High operating  
efficiency




## Powerful & durable

High power Li-ion battery



Metal handle

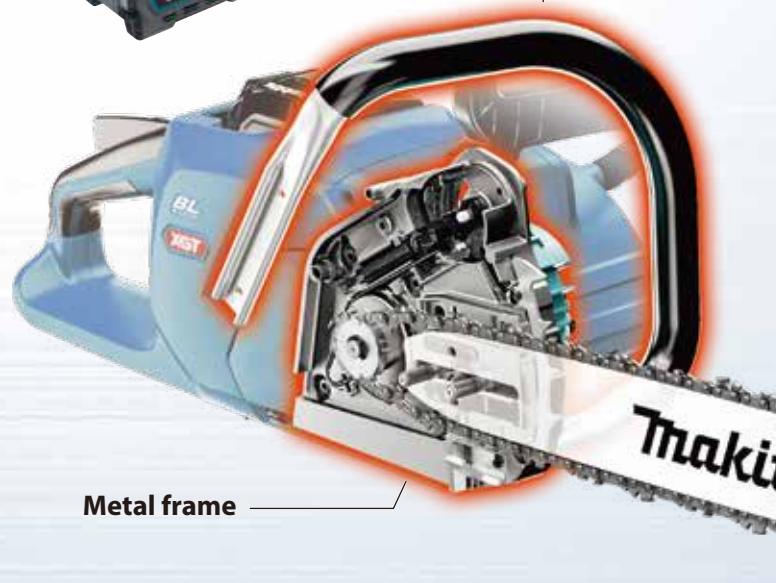

Metal frame



## Excellent tool balance



Slim body

42cc engine tool

Center of gravity



**WG / IPX4**  
**WET GUARD**

High water-resistance allows to operate  
the machine even if it is wet with water.

## High Speed cutting

Compared to predecessor model

**80% up**

- $\phi$ 300mm cedar timber
- Guide bar/ Saw chain:  
400mm/ 80TXL
- Battery : BL4050F

## Cutting work amount

Work volume on a single full battery charge

About **35** cuts

- $\phi$ 300mm cedar timber
- Guide bar/ Saw chain:  
400mm/ 80TXL
- Battery : BL4050F



Chain tensioning screw



Captive nuts prevent loss of nut  
when removing a sprocket cover to  
replace a guide bar or a saw chain.



Tool-less chain adjustment  
Easier saw chain tightening  
Higher tightening torque



Metal chain catcher



Variable speed trigger  
switch



Main power switch  
allows for easy chain oil filling.



High performance in  
close-to-the-ground cutting



Metal spike bar



Large oil tank cap  
allows for easy chain oil filling.