



Cordless Hedge Trimmer

UH014G 750 mm (29-1/2")



XGT
40V LI-ION
max

Same level performance as
petrol hedge trimmer.



UH014G

Blade Length:
750 mm (29-1/2")



BL **XPT**
MOTOR

Light weight
UH014G

4.3 kg

battery: BL4024 (2.5Ah)

Cutting strokes
per minute

5,000 min⁻¹

High speed mode

Low noise

92 dB (A)

UH014G



Maximum branch diameter
23.5 mm
Maximum cutting diameter: 18mm

Large Chip receiver

750mm

BL
MOTOR
High power
Brushless motor



XPT
eXtreme Protection
Technology




3-speed
High : 5,000 SPM
Medium : 3,600 SPM
Low : 2,000 SPM
Reverse rotation system to
frees the blade when it is
jammed by thick branches



Easy-to-use Front handle


• Redesigned the gripping position of Front handle and place the center of gravity on the line connecting Front handle and Rear handle to reduce the force applied in the direction of twisting the wrist.

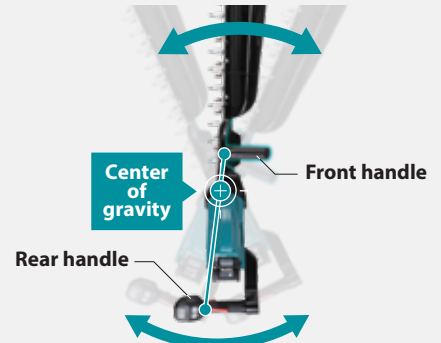

• Due to the inclination of Front handle end, it can be gripped when cutting the top surface, the angle at which the wrist is returned can be reduced, and wrist fatigue is reduced.



Twigs are caught easily and held firmly



Optimum blade shape for smooth cutting

Sharp edge blades
Upper blade: curving downward
Lower blade: curving upward



Anti-vibration structure

consisting of Motor-crank section and handle section linked by cushions to absorb vibration from blade and motor-crank section



Accessories

Shear blade

Part No. 191Y05-2
size: 750mm



Chip receiver assembly set

Part No. 191D34-9



Grease vessel set

Part No. 199450-5

Charging Time

	DC40RA	DC40RC
*1BL4020 2.0Ah 191L29-0	22 min	30 min
*1BL4025 2.5Ah 191B36-3	28 min	38 min
*1BL4040 4.0Ah 191B26-6	45 min	67 min
BL4050F 5.0Ah 191L47-8	50 min	85 min

*1 Recommended battery

Cordless Hedge Trimmer

UH014G 750 mm (29-1/2")

Brake	Blade Length 750 mm (29-1/2")
Reversing	Tooth Spacing 35 mm (1-3/8")
Electronic 3-Speed	Max Branch Capacity 23.5 mm (15/16")
Constant Speed	Max Cutting Capacity 18 mm (11/16")
Anti Vibration	Strokes Per Minute (SPM) High / Med / Low: 5,000 / 3,600 / 2,000
	Continuous Use (min.) w/ BL4040 High / Med / Low: 80 / 155 / 380
	Sound Pressure Level 81 dB(A)
	Sound Power Level 92 dB(A)
	Vibration Level Front Grip 3.2 m/s ²
	Dimensions (L x W x H) w/ BL4020 / BL4025: 1,225 x 270 x 135 mm (48-1/4 x 10-5/8 x 5-5/16")
	Net weight 4.0 - 4.7 kg (8.8 - 10.4 lbs.)

Standard Equipment : Blade Cover, Safety Goggles (country-specific), Chip Receiver (country-specific), Battery, Charger

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table. Items of standard equipment and specifications may vary by country or area.

Makita Singapore Pte Ltd

7, Changi South Street 3, Singapore 486348
Phone : +65-6546-8700 Fax : +65-6546-8711
Email : msgproductteam@makita.com.sg
Website : www.makita.com.sg
Facebook : www.facebook.com/MakitaSG



MakitaSG



VISIT OUR WEBSITE



DOWNLOAD LEAFLET