


**18V LITHIUM-ION**

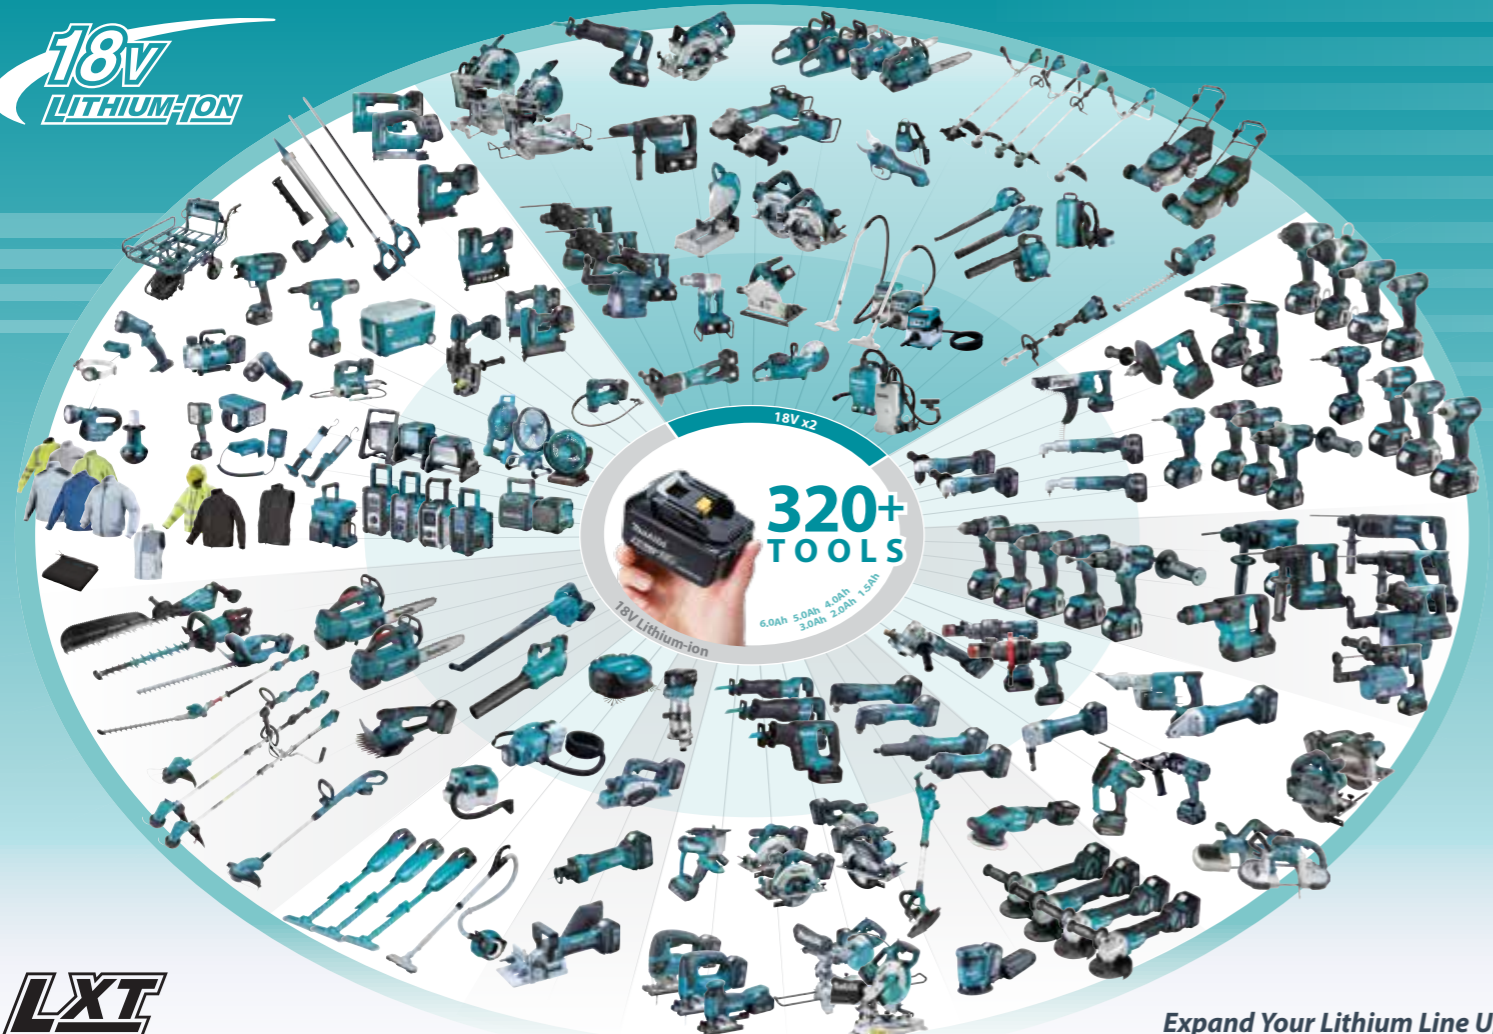

**LXT**

Expand Your Lithium Line Up

**Connect Electricity**

**Cordless Fan Jacket  
Cordless Fan Vest**

DFJ310 / DFJ416  
DFJ212 / DFJ213  
DFJ214 / DFV210



**Cordless Fan**  
DCF203



**Job Site Radio**  
DMR114



**Cordless Job Site Speaker**  
DMR203



**Cordless Coffee Maker**  
DCM501



**Cordless Heated Jacket  
Cordless Heated Vest**

DCJ205 / DCJ206  
DCV202



**Cordless Heated Blanket**  
DCB200



**Charging Time**

	DC18RC	DC18RD	DC18SD
<b>BL1815N 1.5Ah</b>	<b>15 min</b>	<b>30 min</b>	
<b>BL1830B 3.0Ah</b>	<b>22 min</b>	<b>60 min</b>	
<b>BL1850B 5.0Ah</b>	<b>45 min</b>	<b>110 min</b>	
<b>BL1860B 6.0Ah</b>	<b>55 min</b>	<b>130 min</b>	

**Cordless Cooler and Warmer Box  
DCW180**

<b>Capacity</b>	20 L (5.3 gal)
<b>Cooling System</b>	Compressor type
<b>Cooling Capacity</b>	-18 / -10 / 0 / 5 / 10°C (0 / 15 / 30 / 40 / 50°F)
<b>Warming System</b>	Heater
<b>Warming Capacity</b>	55 / 60°C (130 / 140°F)
<b>Run Time</b>	w/ BL1860B X2, -18°C / 5°C / 60°C: 5h / 17h / 4h
<b>Cord Length</b>	AC Adaptor / Cigar Socket Cable: 2 / 2.5 m (6.5 / 8.2 ft)
<b>Thermal Insulation Thickness</b>	33 mm
<b>Dimensions (L x W x H)</b>	623x341x371.5 mm (24-1/2"x13-3/8"x14-5/8")
<b>Net weight</b>	13.3 - 14.3 kg (29.3 - 32.0 lbs.)
<b>Standard Equipment:</b>	Shoulder Belt, AC Adaptor, Cigar Socket Cable

*Items of standard equipment and specifications may vary by country or area.*

**Makita Singapore Pte Ltd**  
7, Changi South Street 3, Singapore 486348  
Phone : +65-6546-8700 Fax : +65-6546-8711  
Email : msgproductteam@makita.com.sg  
Website : www.makita.com.sg  
Facebook : www.facebook.com/MakitaSG



MakitaSG



VISIT OUR WEBSITE



DOWNLOAD LEAFLET

PRINTED IN SINGAPORE

Satisfy Professional's Needs

**LXT**

**Makita**

**Cordless Cooler and Warmer Box  
DCW180**



**Keep cold, Keep warm**



**Cool**  
**-18°C ~ 10°C**  
**[0°F ~ 50°F]**

**Warm**  
**55°C ~ 60°C**  
**[130°F ~ 140°F]**

Large capacity  
**20 L**

**IPX4**

**18V LITHIUM-ION**



# Cordless Cooler and Warmer Box



**Cooling capacity**  $-18^{\circ}\text{C} \sim 10^{\circ}\text{C}$   
 $[0^{\circ}\text{F} \sim 50^{\circ}\text{F}]$   
 Five inside temperature settings

**Warming capacity**  $55^{\circ}\text{C} \sim 60^{\circ}\text{C}$   
 $[130^{\circ}\text{F} \sim 140^{\circ}\text{F}]$   
 Two inside temperature settings

## Long run time



Work amount on a single full battery charge (BL1860B x2)\*

$-18^{\circ}\text{C} [0^{\circ}\text{F}]$	$5^{\circ}\text{C} [40^{\circ}\text{F}]$	$60^{\circ}\text{C} [140^{\circ}\text{F}]$
about <b>5h</b>	about <b>17h</b>	about <b>4h</b>

## Compatible with 3 power sources:



18V LXT battery  
 (two in parallel or one)



AC (through AC adapter)



12V/24V DC (cigar socket)



## 20L (5.3gal) capacity



500mL plastic bottles x20



2L plastic bottles x4

## Seven inside temperature settings

Cooling capacity				Warming capacity	
$-18^{\circ}\text{C}/0^{\circ}\text{F}$	$-10^{\circ}\text{C}/15^{\circ}\text{F}$	$0^{\circ}\text{C}/30^{\circ}\text{F}$	$5^{\circ}\text{C}/40^{\circ}\text{F}$	$10^{\circ}\text{C}/50^{\circ}\text{F}$	$55^{\circ}\text{C}/130^{\circ}\text{F}$ $60^{\circ}\text{C}/140^{\circ}\text{F}$

\*Operating times are approximate and may differ depending on battery type, charging status, and usage condition.