


**High Power**  
**Durability**  
**Digital Communication**

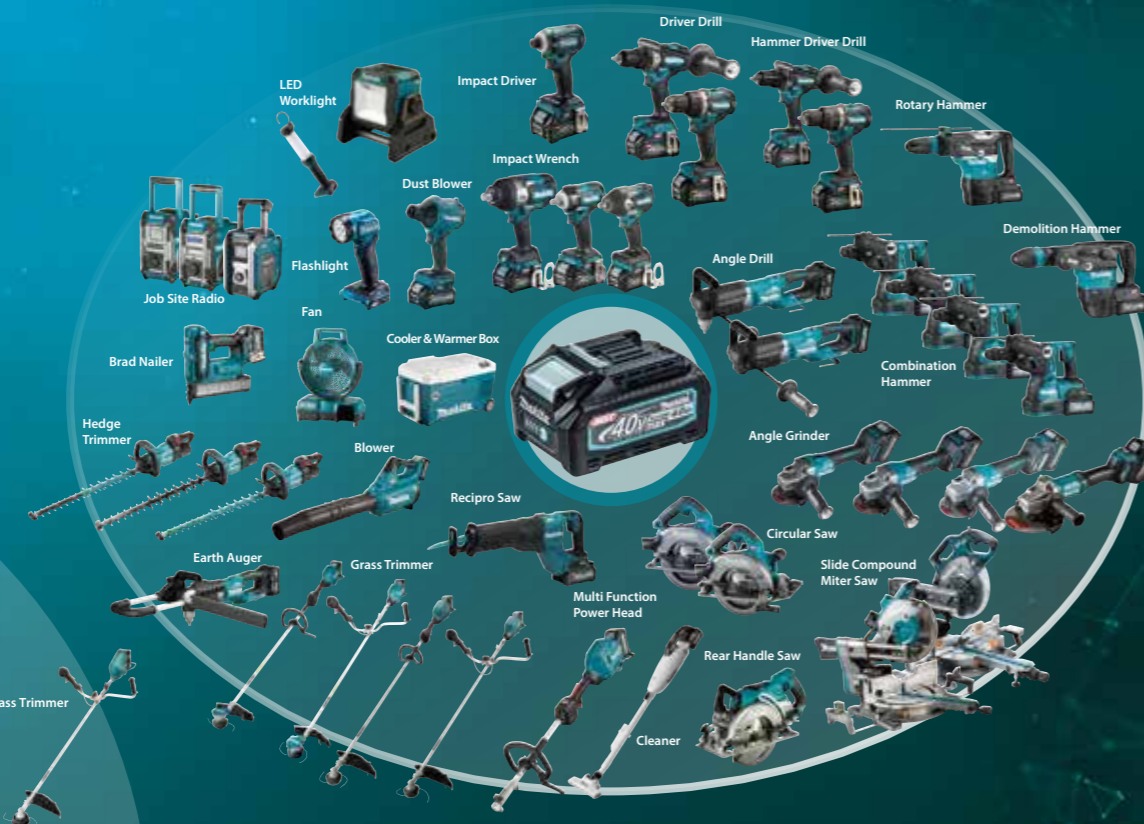

**Accessories**

Shaft	Stainless steel (M12, L: 584mm, D: 12mm)						
Part No.	168349-5			A-43773			
Mixing Blade dia (mm)	130	150	165	135	175	190	220
Shape							
Part No.	A-43670	A-43686	A-43692	A-43723	A-43701	A-33065	A-43717
Bolt Size (Bolt sold separate)	M8 x 18	*M8 x 25	M8 x 18	W5/16 x 16	W5/16 x 16	W5/16 x 16	M8 x 16
Part No.	265220-5	251686-5	265220-5	265475-2	265475-2	265475-2	265440-1

\*With Bolt

**Charging Time**

	DC40RA	DC40RC
**BL4020 2.0Ah 191L29-0	22 min	30 min
**BL4025 2.5Ah 191B36-3	28 min	38 min
**BL4040 4.0Ah 191B26-6	45 min	67 min
**BL4050F 5.0Ah 191L47-8	50 min	85 min
**BL4080F 8.0Ah 191X65-8	76 min	170 min

\*1 Recommended battery

Cordless Mixer	UT001G 240 mm (9-1/2")
Variable Speed	Blade diameter 240 mm (9-1/2")
Mechanical 2-Speed	Chuck capacity -
Constant Speed	No Load Speed (RPM) High / Low: 0 - 920 / 0 - 500
Soft Start	Sound Pressure Level 81 dB(A)
	Sound power level 92 dB(A)
	Vibration level (m/s <sup>2</sup> ) Operation w/o load: 2.5 m/s <sup>2</sup> or less
	Dimensions *414 x 458 x 235 mm
	(L x W x H) (16-1/4 x 18 x 9-1/4")
	Net weight 5.7 - 7.0 kg (12.6 - 15.4 lbs.)
	*w/o Mixing blade and Shaft
<b>Standard Equipment :</b>	
Mixing blade, Shaft (country-specific), Shaft holder (country-specific), Wrenches (country-specific), Battery, Charger	

The weight may differ depending on the attachment(s), including the battery cartridge.  
The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table.  
Items of standard equipment and specifications may vary by country or area.

**Makita Singapore Pte Ltd**  
7, Changi South Street 3, Singapore 486348  
Phone : +65-6546-8700 Fax : +65-6546-8711  
Email : msgproductteam@makita.com.sg  
Website : www.makita.com.sg  
Facebook : www.facebook.com/MakitaSG



PRINTED IN SINGAPORE

Max blade diameter  
**ø240 mm**







**Heavy duty operation such as mixing concrete**



**Mixing speed selectable according to a variety of material**



**High speed**  
**0 - 920**  
**min<sup>-1</sup>**

for fast mixing of medium viscous material such as mortar or paint

Possible to adjust blade speed even finer according to material.



+



Mechanical 2-speed gearing

Variable speed control by dial

**Low speed**  
**0 - 500**  
**min<sup>-1</sup>**

for mixing high viscous material such as concrete



**BL**  
**MOTOR**

High operating efficiency



**XPT** eXtreme Protection Technology



Switch cover is minimizes the chance that switch trigger or lock-on button might be stuck by adhered and hardened material.

Lock-off  
Lock-on  
Variable speed control by trigger



During mixing, blade speed can be adjusted by operating trigger in order to reduce the chance that material might spatter out of mixing bucket.

Battery cover is minimizes the chance that spattered material might adhere to battery.

Battery cover

Compatible battery  
BL4080F, BL4050F  
BL4040, BL4025  
BL4020



Double D-handle with ergonomic soft grip

Allows user to operate in stable work posture with less fatigue



Soft start

Slow blade speed at the start of mixing provides:  
• less reaction force to operator at start-up.  
• minimized spatter of material.

Max blade diameter



ø240 mm

photo:  
UT001G with Mixing blade

Shank holding mechanism

Screw-in type shaft holder  
M12/ M14 (Country-specific)

