

Battery

BL64100
64Vmax / Typ.10Ah battery



BL6440
64Vmax / 4.0Ah battery



Battery fuel gauge
• 4-LED gauge (green)
• With a check button



Assist handle
• assists easy installation / removal of the battery from the lawn mower or battery charger.
• allows for easy transportation of the battery to job site.



Cordless Lawn Mower
LM004J 530 mm (21")

64Vmax Cordless Lawn Mower

Plastics Deck

BL SOFT MOTOR NOLOAD XPT

LM001J
480 mm (18-7/8")

LM002J
530 mm (21")



Steel Deck




Self-Propelled

BL SOFT MOTOR NOLOAD XPT

LM004J
530 mm (21")



Accessories

Blade type	Part No.	Applications and features
2-tooth blade 	191V96-5	Standard blade for grass collection and mulching
Collecting blade 	191W87-2	Longer and higher blade tip generates larger amount of airflow, providing more efficient discharge of grass clippings. This blade, therefore, enables clog-free collection of grass clippings even in mowing a large amount of grass.
Mulching blade 	191Y65-4	This blade cuts grass clippings into small particles and scatters them evenly on the ground for mulching. The blade is, therefore, designed to generate a proper volume of airflow enough to circulate grass clippings in the cutting deck.

Mulching plug

Size: 534mm
Part No. 413L55-2



Discharge chute

Size: 534mm
Part No. 413L57-8



Charging Time

Battery Model	Capacity	Charging Time
DC64WA Part No. 191W23-8	4.0Ah	120 min
BL6440 Part No. 191R06-8	4.0Ah	120 min
BL64100 Part No. 191Y69-6	10.0Ah	300 min

Cordless Lawn Mower	
LM004J 530 mm (21")	
Brake	Cutting width: 534 mm (21")
Electronic 2-Speed	Cutting height adjustment: Adjustment range: 20 - 100 mm (13/16 - 3-15/16") Stage: 10
Constant Speed	No load speed (RPM): Normal mode: 2,800 Soft no-load mode: 2,300 - 2,800 Noise reduction mode: 2,300
	Wheel diameter: 230 / 230 mm (9 / 9")
	Grass box Capacity: 70 L (2,366 oz)
	Vibration level: 2.5 m/s ² or less
	Measured sound power level: 91 dB(A)
	Guaranteed sound power level: 94 dB(A)
	Sound pressure level: 82 dB(A)
	Dimensions (L x W x H): During operation: 1,740 - 1,810 x 595 x 970 - 1,080 mm (68-1/2 - 71-1/4 x 23-1/2 x 38-1/4 - 42-1/2")
	Net weight: 31.5 - 34.6 kg (69.5 - 76.3 lbs.)
Standard Equipment : Blade, Mulching plug, Socket wrench, Rod, Discharge chute, Battery, Charger	

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table. Items of standard equipment and specifications may vary by country or area.



Powered by 64Vmax Li-ion battery
BL64100
Powerful Li-ion battery with 564.48Wh energy capacity

Continuous run time
Push-Drive / Self-propelled
81/59 min
Battery: BL64100 on a full battery charge

Makita Singapore Pte Ltd
7, Changi South Street 3, Singapore 486348
Phone : +65-6546-8700 Fax : +65-6546-8711
Email : msgproductteam@makita.com.sg
Website : www.makita.com.sg
Facebook : www.facebook.com/MakitaSG



PRINTED IN SINGAPORE



64V Li-ion max

High power and high efficiency

Mowing area

on a full battery charge (with BL64100)

The results shown here are mowing area when cutting 20 mm off the height of grass with a fully charged battery at max speed mode, and depends to a great extent on grass density, cutting height, etc.

LM004J (534mm)

Steel Deck

Self-Propelled



Push-Drive
about
3,800 m²

Self-propelled
(6.5km/h)
about
2,800 m²



Powered by 64Vmax Li-ion battery



Typ. **10 Ah**
Battery
BL64100

Grass box with indicator




Cutting, Collecting, Mulching*², Rear discharge, Side discharge*³

*² Mulching plug required. *³ Discharge chute required.



BL
MOTOR

New outer rotor motor optimized for lawn mower

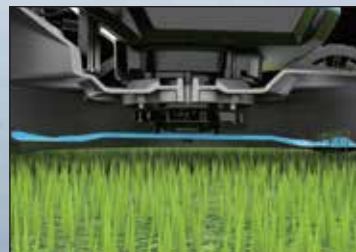

Higher mowing performance

The blade is designed so that it tilts towards the front side of the mower when attached, preventing double-cutting for reduced current consumption.

Self-Propelled

with a speed range of **1.5-6.5 km/h**

- The self-propelled speed is 6.5km/h, the same as that of engine lawn mower, making it ideal for professional work with high work efficiency.
- The lowest speed is 1.5km/h, which is suitable for small jobs.
- On/off switch lever for self-propelled function
- Quick acceleration (0.5s to full speed)

Approx speed range: km/h	Main application
1.5-2.5	Mowing a small area around tree, near obstacle, etc where lawn mower is required to turn in a small space
2.5-4.0	Heavy-duty applications such as mowing on slope, cutting dense and long grass, etc
4.0-6.5	Light- to medium-duty mowing on flat ground



Self-propelled motor unit



One hand cutting height adjustment

20 - 100mm (10 stages)



Variable speed control lever



Rigid foldable handle



The inside of cutting deck can be washed.

(Self-propelled section must not get wet with water.)



Large wheel front/rear ø230mm



Vertical storage

3 Cutting mode selection

Selectable according to operating environment:

- Normal mode
- Soft no-load mode
- Noise reduction mode

XPT eXtreme Protection Technology