


High Power
Durability
Digital Communication



Max fastening torque
210
N·m

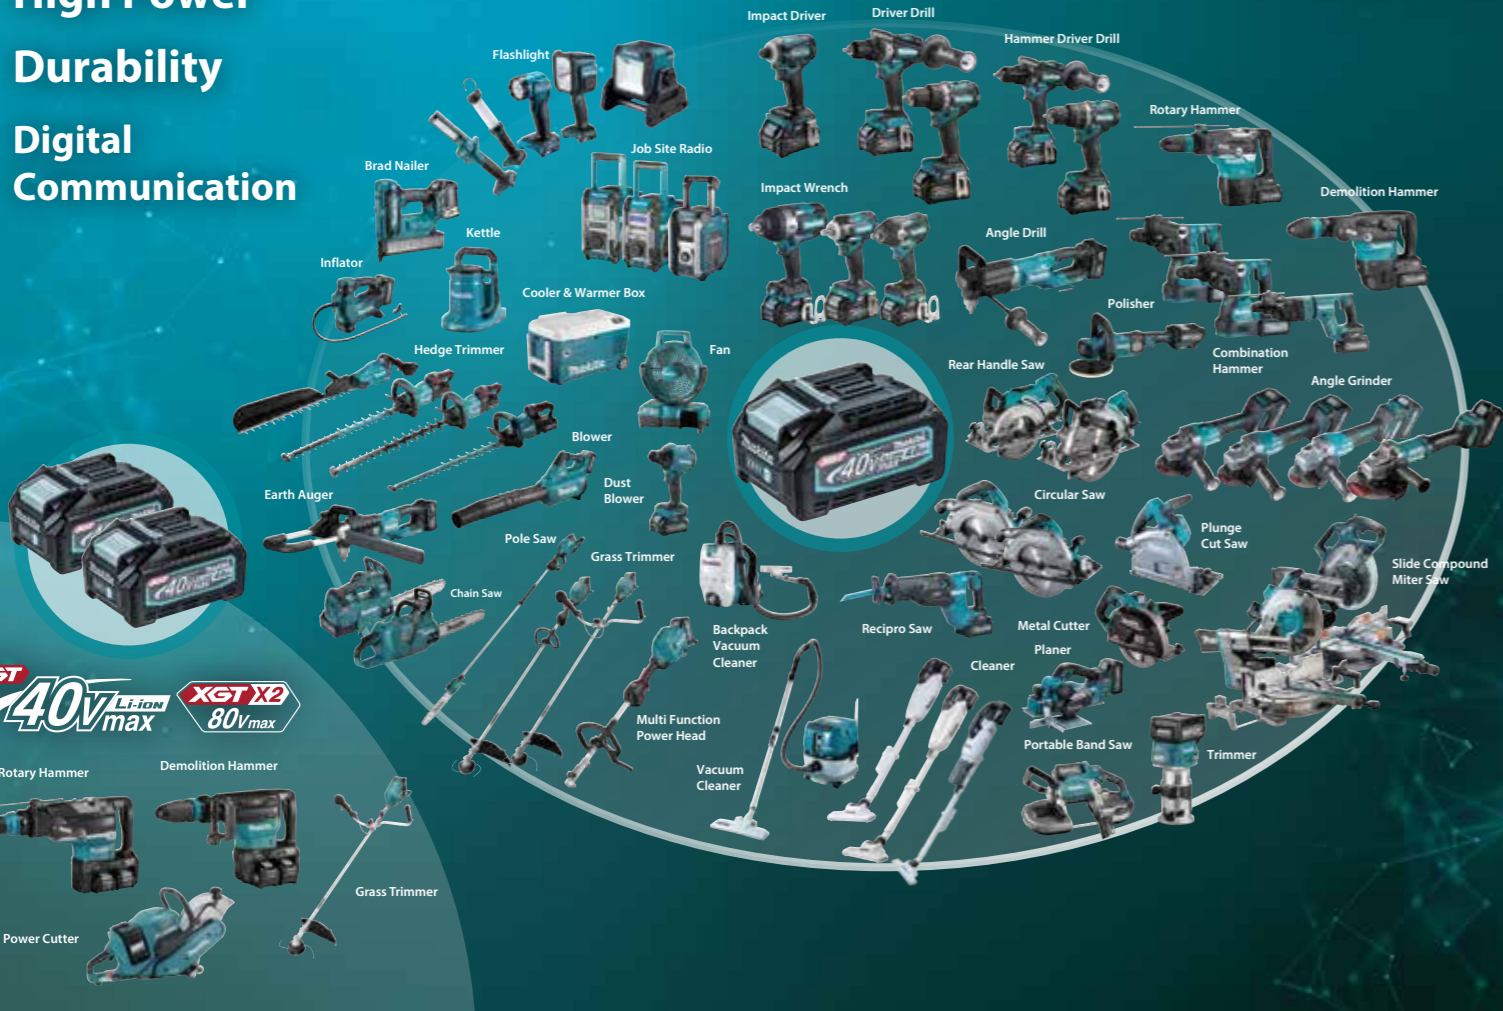

Accessories

Tool hanger set

Part No. 191F58-7

Enables to hook the machine quickly on a snap hook of waist belt, to prevent the machine from falling.



Charging Time

	DC40RA	DC40RC
*BL4020 2.0Ah 191L29-0	22 min	30 min
*BL4025 2.5Ah 191B36-3	28 min	38 min
*BL4040 4.0Ah 191B26-6	45 min	67 min
*BL4050F 5.0Ah 191L47-8	50 min	85 min
*BL4080F 8.0Ah 191X65-8	76 min	170 min

*1 Recommended battery

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table. Items of standard equipment and specifications may vary by country or area.

Cordless Impact Driver

TD003G

Variable Speed	Capacity	Machine screw: M4 - M8 (5/32 - 5/16"), Standard bolt: M5 - M16 (3/16 - 5/8") High strength bolt: M5 - M14 (3/16 - 9/16"), Steel: 22 mm (7/8") Coarse thread (in length): 22 - 125 mm (7/8 - 4-7/8")
Brake	No Load Speed (RPM)	Max / Hard / Med. / Soft / T mode: 0 - 3,700 / 0 - 3,200 / 0 - 2,100 / 0 - 1,100 / 0 - 2,400
Reversing	Impacts per minute (IPM)	Max / Hard / Med. / Soft: 0 - 4,100 / 0 - 3,600 / 0 - 2,600 / 0 - 1,400
Electronic 4-Speed	Fastening torque	Hard / Med. / Soft: 170 / 50 / 20 N·m (1,510 / 440 / 180 in.lbs.)
Constant Speed	Max fastening torque	210 N·m (1,860 in.lbs.)
Built-in Job Light	Vibration Level	Impact tightening of fasteners of the maximum capacity of the tool: 11.9 m/s ²
	Sound Pressure Level	95 dB(A)
	Sound Power Level	106 dB(A)
	Dimensions (L x W x H)	w/o Battery: 121 x 86 x 195 mm (4-3/4 x 3-3/8 x 7-5/8") w/ BL4020 / BL4025: 121 x 86 x 245 mm (4-3/4 x 3-3/8 x 9-5/8") w/ BL4040: 121 x 86 x 252 mm (4-3/4 x 3-3/8 x 9-7/8")
	Net weight	1.7 - 2.9 kg (3.7 - 6.4 lbs.)

Standard Equipment: Belt clip, Hand strap (country-specific), Battery, Charger

Makita Singapore Pte Ltd

7, Changi South Street 3, Singapore 486348
Phone : +65-6546-8700 Fax : +65-6546-8711
Email : msgproductteam@makita.com.sg
Website : www.makita.com.sg
Facebook : www.facebook.com/MakitaSG



MakitaSG



VISIT OUR WEBSITE



DOWNLOAD LEAFLET

PRINTED IN SINGAPORE

Work amount on a full battery charge BL4025

approx **280** pcs.

Drove 120mm coarse thread screws into melapi.



Aluminum hammer case

One-touch bit installation

Smoother installation of the bit has been achieved by reducing the resistance against insertion of the bit.

Anti-bit wobbling structure




**BL
MOTOR**

Max fastening torque
210
N·m



Simple impact power selection

Mode	Rotation direction	Assist function
4 modes (for bolt)	Forward	Stops the machine approx 0.2 seconds after it has stopped impact blows.
	Reverse	No
T-mode (for thin metal only)	Forward	Stops the machine at the same time as impact blow is detected.
	Reverse	No

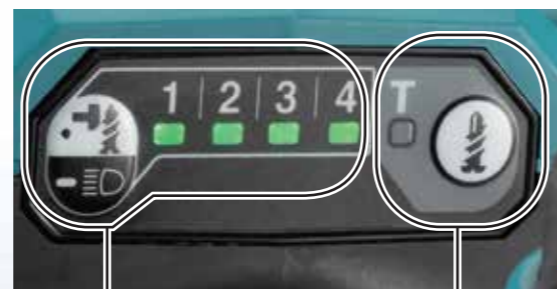

4 modes

(Max/ Hard/ Med. / Soft for bolt)

1 T-mode

(for thin metal only)

One LED job light each on both sides

Light mode

- To turn on the light, set F/R change lever in the neutral position, then pull the switch trigger. To turn off the light, pull the switch trigger again.
- The light turns off automatically one hour after turned on.



Constant speed control

Allows to operate the tool at the same speed as that at which you operate the tool on a full charged battery, even when the remaining battery capacity becomes low.

Variable speed control by trigger

XPT

eXtreme Protection Technology

