

High Power
Durability
Digital Communication



XGT **40V Li-ion max** **XGT X2** **80V max**



XGT
40V Li-ion max



Comfort/Lifestyle

Cordless Kettle
KT001G

40V max



Water Tank Capacity	800 mL
Dimensions (L x W x H)	233 x 322 x 307 mm (9-1/8 x 12-5/8 x 12-1/8")
Net weight	2.8 - 5.9 kg (6.2 - 13.0 lbs.)

Cordless Cooler & Warmer Box

CW001G

40V max
18V



CW002G

40V max
18V



CW003G

40V max
18V



	CW001G	CW002G	CW003G
Capacity	20 L (5.3 gal)	50 L (13.2 gal)	7 L (1.8 gal)
Cooling Capacity	-18 / -15 / -10 / -5 / 0 / 5 / 10°C (0 / 5 / 15 / 25 / 30 / 40 / 50°F)	-18 / -15 / -10 / -5 / 0 / 5 / 10°C (0 / 5 / 15 / 25 / 30 / 40 / 50°F)	-18 / -15 / -10 / -5 / 0 / 5 / 10°C (0 / 5 / 15 / 25 / 30 / 40 / 50°F)
Warming Capacity	30 / 35 / 40 / 45 / 50 / 55 / 60°C (85 / 95 / 105 / 115 / 120 / 130 / 140°F)	30 / 35 / 40 / 45 / 50 / 55 / 60°C (85 / 95 / 105 / 115 / 120 / 130 / 140°F)	30 / 35 / 40 / 45 / 50 / 55 / 60°C (85 / 95 / 105 / 115 / 120 / 130 / 140°F)
Dimensions (L x W x H)	663 x 341 x 372 mm (26-1/8 x 13-3/8 x 14-5/8")	867 x 465 x 476 mm (34-1/8 x 18-1/4 x 18-3/4")	456 x 245 x 308 mm (18 x 9-5/8 x 12-1/8")
Net weight	13.8 - 17.3 kg (30.4 - 38.1 lbs.)	25.6 - 29.0 kg (56.4 - 63.9 lbs.)	7.9 - 9.4 kg (17.4 - 20.7 lbs.)

Charging Time

Battery	Fast Charging			
	DC40RA	DC40RB	DC40RC	DC40WA
*BL4020 2.0Ah 191L29-0	22 min	30 min	110 min	
*BL4025 2.5Ah 191B36-3	28 min	38 min	130 min	
*BL4040 4.0Ah 191B26-6	45 min	67 min	210 min	
*BL4050F 5.0Ah 191L47-8	50 min	85 min	260 min	
*BL4080F 8.0Ah 191X65-8	76 min	170 min	420 min	

*1 Recommended battery

Not covered by EPTA-Procedure / Specifications may differ from country to country.

Cordless Microwave

MW001G

Useful cavity dimensions (W x D x H)	255 x 241 x 120 mm (10 x 9-1/2 x 4-3/4")
Cavity capacity	8 L
Microwave power	High / Low: 500 / 350 W
Operating frequency	2,450 MHz
Continuous run time on full battery charge	350 / 500 W, w/ BL4020 x2: 11 / 6 min. 350 / 500 W, w/ BL4025 x2: 14 / 8 min. 350 / 500 W, w/ BL4040 x2: 21 / 15 min. 350 / 500 W, w/ BL4050F x2: 30 / 22 min. 350 / 500 W, w/ BL4080F x2: 48 / 35 min. 350 / 500 W, w/ PDC1200: 113 / 84 min.
Dimensions (L x W x H)	w/o Battery: 318 x 343 x 338 mm (12-1/2 x 13-1/2 x 13-1/4") w/ BL4020 / BL4025: 366 x 343 x 338 mm (14-3/8 x 13-1/2 x 13-1/4") w/ BL4040: 372 x 343 x 338 mm (14-5/8 x 13-1/2 x 13-1/4") w/ BL4050F: 393 x 343 x 338 mm (15-1/2 x 13-1/2 x 13-1/4") w/ BL4080F: 412 x 343 x 338 mm (16-1/4 x 13-1/2 x 13-1/4")
Net weight	w/o Battery: 8.9 kg (19.6 lbs.) w/ Battery: 9.5-12.7 kg (20.9-28.0 lbs.)

Makita Singapore Pte Ltd

7, Changi South Street 3, Singapore 486348
Phone : +65-6546-8700 Fax : +65-6546-8711
Email : msgproductteam@makita.com.sg
Website : www.makita.com.sg
Facebook : www.facebook.com/MakitaSG



MakitaSG



VISIT OUR WEBSITE



DOWNLOAD LEAFLET

PRINTED IN SINGAPORE


Microwave power

500/350 W


Cavity capacity

8 L

Popular size food container can be heated.

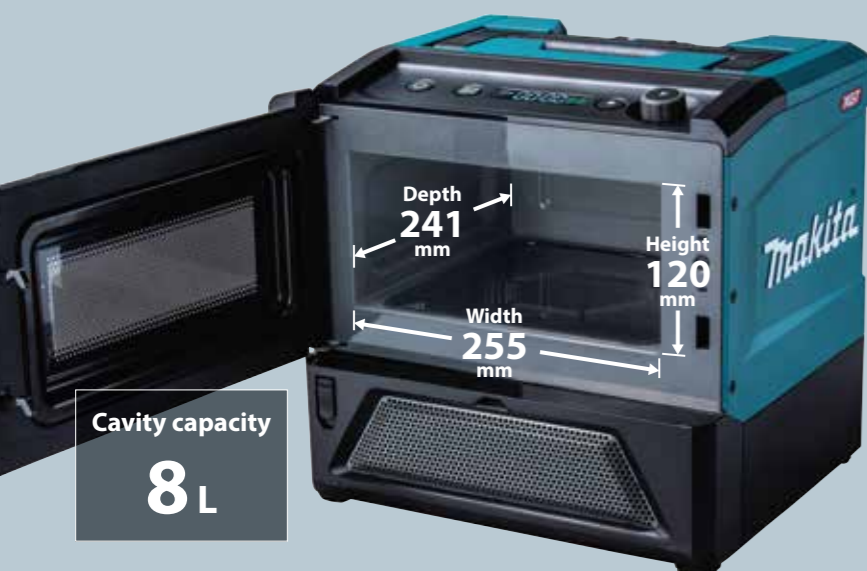

Control panel

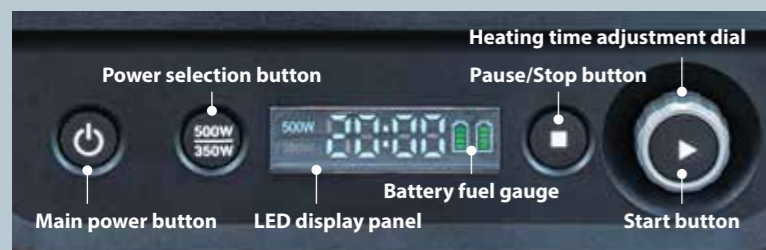

Easy to clean up and maintain

Easy to clean flat cavity plate



Continuous heating time on a full battery charge (approx)

500w: 35 min*

Battery: BL4080F x2



* This is the total time of repeated maximum 8-minute continuous heating at 500W in temporary boost mode

Continuous heating time on a full battery charge (approx)							
Battery	BL4020 x2	BL4025 x2	BL4040 x2	BL4050F x2	BL4080F x2	PDC1200	
Microwave power	350W	11 min	14 min	21 min	30 min	48 min	113 min
	500W	6 min	8 min	15 min	22 min	35 min	84 min



Approx number of times an item can be heated With two fully charged BL4040 batteries	
food container of chilled items	mug of drink (200mL)
5 times	8 times



Three user-oriented functions

1. Stops heating promptly and automatically when tilted.

Does not heat while being tilted for increased relief even in the case of tipping over.



2. Stops heating promptly and automatically when the door is opened during heating.



3. Reminder beep for items left in the cavity

If the microwave door is not opened for 1 minute after heating, a sequence of 3 short beeps sounds every 1 minute for 2 minutes, notifying user of items left in the microwave.



Internal cavity light

Lights up when the door is opened and during heating.

Tempered door glass

- Hard-to-break
- The inside of cavity can be checked during heating.
- Left-hinged side opening door

USB output port

- 1 port (Type A for DC5V / 2.4A)
- With rubber cap for reduced chance of damage to terminal



Excellent portability

- Easy-to-carry compact design yet with proper cavity dimensions where popular size food container can be heated
- Large retractable carrying handle



Accessories

Shoulder belt set
Part No. 196817-8

