


**High Power**  
**Durability**  
**Digital Communication**



**Accessories**

**Diffusion cover**  
Part No. 453506-1

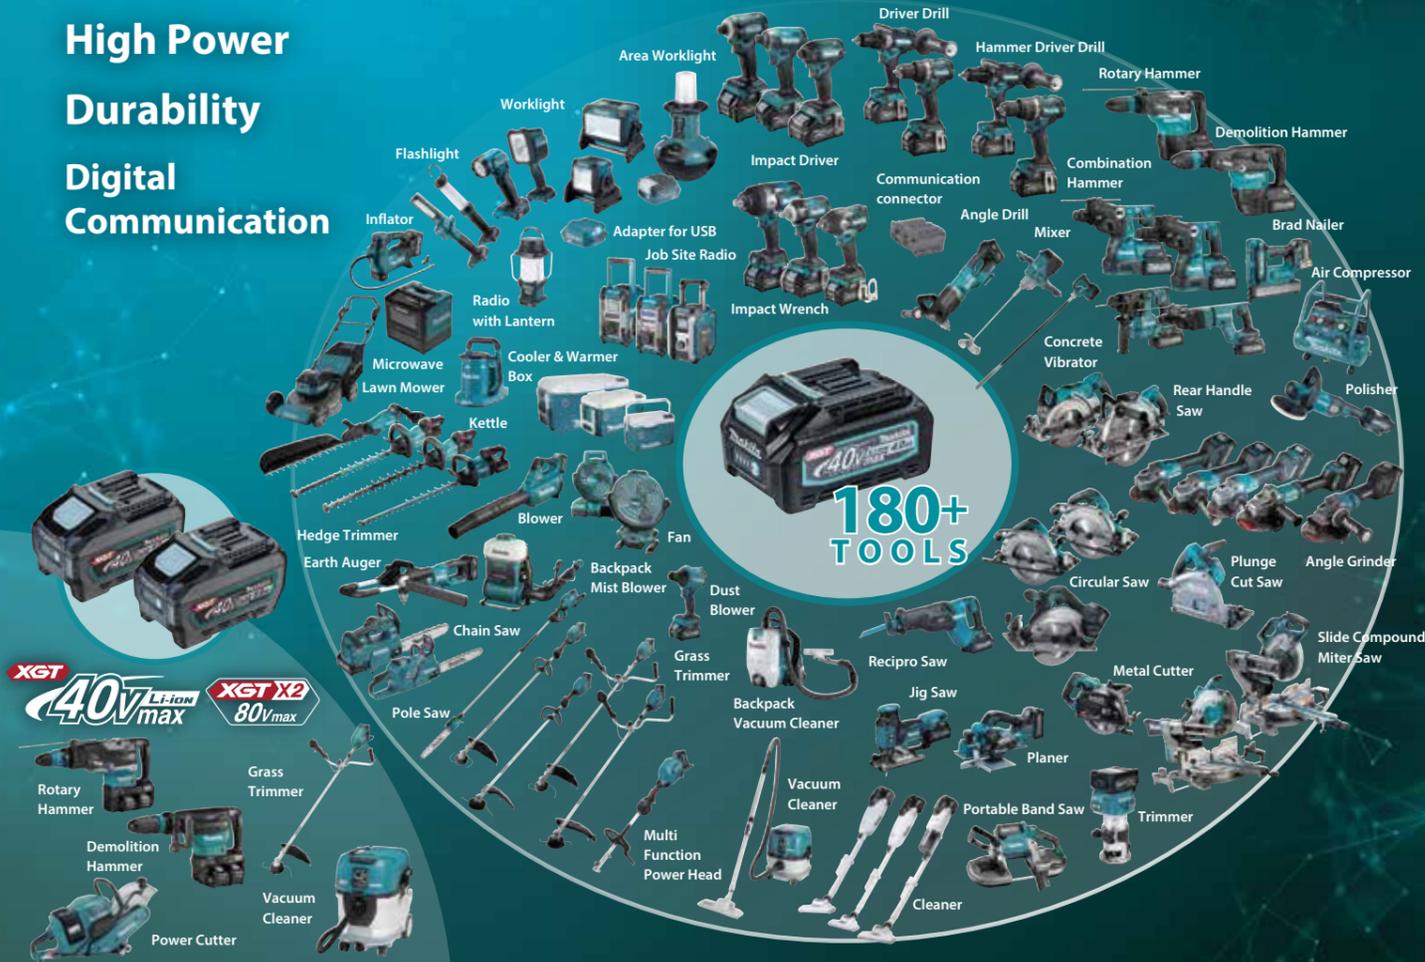

**Deflector cover**  
Part No. 198248-7



**Band 25 set**  
Part No. 196733-4



**Charging Time**

40V Li-ion max	Fast Charging			
	DC40RA	DC40RB	DC40RC	DC40WA
*1BL4050F 5.0Ah 191L47-8	50 min	85 min	260 min	
*1BL4080F 8.0Ah 191X65-8	76 min	170 min	420 min	

**Cordless Backpack Mist Blower**

PM001G	
Variable Speed	Chemical tank capacity 15.0 L (507 oz)
Electronic 3-Speed	Max air volume High/Med./Low: 14.3/11.0/9.0 m <sup>3</sup> /min
Constant Speed	Max air velocity High/Med./Low: 64.0/52.0/42.0 m/s
	Avg. air velocity High/Med./Low: 53.0/43.0/34.0 m/s
	Vibration level 2.5 or less
	Sound pressure level 84.5 dB (A)
	Sound power level 103.3 dB (A)
	Continuous Use (min.) w/ BL4080F x2 High: 20
	Dimensions (L x W x H) w/o Nozzle: 320 x 600 x 690 mm (12-5/8 x 23-5/8 x 27-1/4")
	Net weight 13.2 - 15.7 kg (29.1 - 34.6 lbs.)
Standard Equipment : Diffusion cover, Wrench, Nozzle, Battery, Charger	

\*1 Recommended battery  
The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table.  
Items of standard equipment and specifications may vary by country or area.

**Makita Singapore Pte Ltd**  
7, Changi South Street 3, Singapore 486348  
Phone : +65-6546-8700 Fax : +65-6546-8711  
Email : msgproductteam@makita.com.sg  
Website : www.makita.com.sg  
Facebook : www.facebook.com/MakitaSG



VISIT OUR WEBSITE

DOWNLOAD LEAFLET

PRINTED IN SINGAPORE

**Solution tank capacity**

**15 L**

**Max spray range**  
High spraying speed mode

**14 m**  
(horizontal)

**Continuous run time**  
on a full battery charge  
High spraying speed mode

**22 min**  
Battery: BL4080F x2

**Average particle size**  
High spraying speed mode

**50/150 µm**  
ULV nozzle/Standard nozzle





### Switch Interlocking Valve

The opening/closing operation of the solution supply valve is interlocked with the switch trigger to suppress dripping of solution.

### Max spray distance: 14m



### 3 spraying speed modes



- Selectable with the button on control handle
- With mode memory function (In the next operation, the machine will resume operation in the same mode as last time user turn off.)

High spraying speed mode	Long distance spraying allows for outdoor operation.
Medium spraying speed/Low spraying speed mode	For indoor operation or runtime-oriented operation

### ULV compatibility

- Compatible with ULV (Ultra Low Volume) spray for pesticides, etc.
- Only available in High spraying speed mode

Nozzle type	Average particle size
ULV nozzle	50µm
Standard nozzle	150µm

### Powered by 40Vmax XGT Li-ion battery (two in parallel or one)



### Automatic battery switching

If two batteries are installed and one battery in use has run out of power, the battery system automatically switches to use to the other one.

**Continuous run time**  
on a full battery charge  
High spraying speed mode


**22 min**  
Battery: BL4080F x2

### A variety of front covers

**Diffusion cover**  
You can diffuse the mist by attaching the diffusion cover to the end nozzle



**Deflector set (Option)**  
You can discharge the mist upward or downward by attaching the deflector to the end nozzle



Spray amount adjusting dial



Variable grip



Variable speed trigger



Tank filter port diameter: 0.5mm (max)