

40V^{Li-ion} max + 40V^{Li-ion} max

XGT X2
80V^{max}

High Power
Durability
Digital Communication



XGT 40V^{Li-ion} max **XGT X2** 80V^{max}



Satisfy Professional's Needs



Cordless Power Cutter
CE002G 355 mm (14") Dry
CE001G 355 mm (14") Dry & Wet



XGT X2
80V^{max}

40V^{Li-ion} max + 40V^{Li-ion} max



CE002G
355 mm (14") Dry



CE001G
355 mm (14") Dry & Wet



Accessories

Diamond wheel for concrete

Segmented type 355 x 25.4
Part No.
Dry *D-56998 (EN)
Dry & Wet E-12996 (EN)
*Laser Welding



Abrasive cut-off wheel for Metal CE001G only

355 x 4.3 x 25.4 A24T
5per set
Part No.
E-12790



Wireless unit set

CE002G only
Part No.
199393-1



Charging Time

	Fast Charging			
	DC40RA	DC40RB	DC40RC	DC40WA
BL4040 4.0Ah 191B26-6	45 min	67 min	210 min	
* BL4040F 4.0Ah 1910N6-8	45 min	67 min	210 min	
* BL4050F 5.0Ah 191L47-8	50 min	85 min	260 min	
* BL4080F 8.0Ah 191X65-8	76 min	170 min	420 min	

*1 Recommended battery

Cordless Power Cutter

	CE002G	CE001G
Brake	355 mm (14")	355 mm (14")
Dust Collection (CE002G only)	25.4 mm (1")	25.4 mm (1")
Built-in Job Light	4.0 mm (5/32")	5.0 mm (3/16")
Standard Equipment: CE002G: Wrench, Ring set, Hose clamp, Wireless unit (country-specific), Wireless unit adapter (country-specific), Battery, Charger CE001G: Wrench, Coupling sleeve, Ring set, Battery, Charger	Min. wheel thickness	2.0 mm (5/64")
	Max cutting capacity	127 mm (5")
	No load speed (RPM)	4,200
	Vibration level	2.5 / 2.5 m/s ² or less
	Concrete cutting, Left / Right:	106 dB(A)
	Sound pressure level	117 dB(A)
	Sound power level	109 dB(A)
	Dimensions (L x W x H) w/ BL4040/F, BL4050F:	825 x 272 x 487 mm (32-1/2 x 10-3/4 x 19-1/4")
	w/ BL4080F:	825 x 283 x 487 mm (32-1/2 x 11-1/8 x 19-1/4")
	Net weight	13.1 - 15.1 kg (28.9 - 33.3 lbs.)

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table. Items of standard equipment and specifications may vary by country or area.

Makita Singapore Pte Ltd
7, Changi South Street 3, Singapore 486348
Phone : +65-6546-8700 Fax : +65-6546-8711
Email : msgproductteam@makita.com.sg
Website : www.makita.com.sg
Facebook : www.facebook.com/MakitaSG



MakitaSG



VISIT OUR WEBSITE



DOWNLOAD LEAFLET

PRINTED IN SINGAPORE

Max. cutting capacity
127mm



CE002G only CE001G only

40V Li-ion max + 40V Li-ion max **XGT X2** 80V max

More powerful than engine tools



Equipped with anti-vibration housing

with built-in spring to absorb the vibration from cutting to integrated front and rear handles.

Low vibration
Front handle Rear handle
2.0/1.2
m/s
Concrete cutting




BL MOTOR High power Brushless motor



AFT Active Feedback sensing Technology

shuts down current to the motor, if the rotation speed suddenly slows down (in the case of kick-back, etc.).

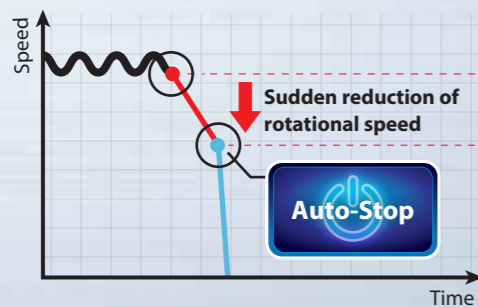

Dust collection rate
90%
or more
Concrete cutting

Max. cutting capacity
127 mm

photo: VC006G

photo: CE002G

Can be used with Vacuum cleaner. CE002G only

Dust collection rate during operation is 90% or more in cutting concrete with vacuum cleaner*1 connected.

- Designed specially for cutting with diamond wheel
 - Our recommended vacuum cleaners *1 are those with air flow of 1.8m³/min or more.
- *1 VC4210M, VC002G series, etc

AWS Auto-start Wireless System

(CE002G only)

connects to compatible vacuum cleaner with Bluetooth. The vacuum cleaner automatically runs while the switch is on.



CE002G 355 mm (14") Dry



Electric brake

XPT eXtreme Protection Technology

(CE001G only)
Enhanced Dust and Drip-proof Performance ensure reliable operation even under bad weather



LED job light



- can be turned on/off with a button conveniently located on the rear handle.
- automatically shuts off when the switch trigger is not pulled for 60 seconds.

LED on/off button



Overload indicator lamp



CE001G 355 mm (14") Dry & Wet



Water supply kit can be connected.