



# Cordless Worklight ML011G / DML817 / ML107



**XGT**  
**40V<sup>max</sup>**  
LITHIUM-ION

**18V**  
LITHIUM-ION

**12V<sup>max</sup>**  
LITHIUM-ION

Max luminous flux  
ML011G / DML817 | ML107  
**300 lm** | **200 lm**



photo: ML011G



photo: DML817



photo: ML011G



photo: DML817



photo: ML107

**ML011G**

**XGT**  
**40V<sup>max</sup>**  
LITHIUM-ION

**USB**



**DML817**

**18V**  
LITHIUM-ION

**USB**



**ML107**

**12V<sup>max</sup>**  
LITHIUM-ION

**USB**




### LED light

Daylight white LED  
(with color temperature  
of 5,000K)



### Three lighting modes

Equipped with 2 LEDs, one for sidelighting and the other for uplighting, for wide-angle illumination.

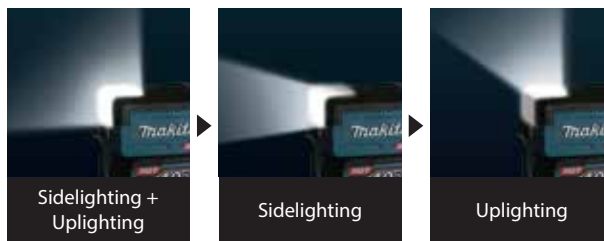

Mode memory function:  
The appliance saves the lighting mode at the time when turned off by press and holding the light switch button.  
(This mode is remembered even if the battery is removed after that.)

### Supplied with Warm white lamp shade

Allowing for changing to warm white tone lighting (with color temperature of 2,500K), which has a high relaxing effect



### Compact design

Minimal size of the appliance has been achieved for space saving use and storage by designing it on the basis of the size of compatible battery.



### USB output port

ML011G/DML817:  
1 port (Type A for DC5V/2.4A)  
ML107:  
1 port (Type A for DC5V/2.1A)  
• With Auto-off function(after 30 minutes of no operation)  
• With Output indication lamp



**USB**

### Also can be used for downlighting

With optional "Strap with hook" fastened to the two Strap holes on the appliance, the light can be used for downlighting by hanging it upside down.



Strap with hook  
(optional accessory)

### Charging Time

	Fast Charging	
	DC40RA	DC40RC
**BL4020 2.0Ah 191L29-0	22 min	30 min
**BL4025 2.5Ah 191B36-3	28 min	38 min
**BL4040 4.0Ah 191B26-6	45 min	67 min
**BL4050F 5.0Ah 191L47-8	50 min	85 min
**BL4080F 8.0Ah 191X65-8	76 min	170 min

\*1 Recommended battery

	Fast Charging	
	DC18RC	DC18SD
BL1815N 1.5Ah 196449-1	15 min	30 min
BL1820B 2.0Ah 197254-9	24 min	45 min
BL1830B 3.0Ah 197599-5	22 min	60 min
BL1850B 5.0Ah 197280-8	45 min	110 min
BL1860B 6.0Ah 197422-4	55 min	130 min

	Fast Charging	
	DC10SB	DC10WD
BL1016 1.5Ah 197393-5	22min	50min
BL1021B 2.0Ah 197396-9	30min	70min
BL1041B 4.0Ah 197406-2	60min	130min

### Accessories

#### Strap with hook

Part No. SE00001178

Strap with hook is fastened to the two Strap holes on the appliance, the light can be used for downlighting by hanging it upside down.



### Cordless Worklight

#### ML011G / DML817 / ML107

	ML011G	DML817	ML107
Illuminance (at 0.5 m from the light source)	Sidelighting + Uplighting / Sidelighting only / Uplighting only: 240 / 190 / 190 lx	Sidelighting + Uplighting / Sidelighting only / Uplighting only: 240 / 190 / 190 lx	Sidelighting + Uplighting / Sidelighting only / Uplighting only: 175 / 130 / 130 lx
Luminous flux	Sidelighting + Uplighting / Sidelighting only / Uplighting only: 300 / 150 / 150 lm	Sidelighting + Uplighting / Sidelighting only / Uplighting only: 300 / 150 / 150 lm	Sidelighting + Uplighting / Sidelighting only / Uplighting only: 200 / 100 / 100 lm
Run time (hrs)	w/ BL4040, at 300 lm: 37 w/ BL4040, at 150 lm: 64 w/o Battery: 107 x 77 x 50 mm (4-1/4 x 3 x 2")	w/ BL1860B, at 300 lm: 28 w/ BL1860B, at 150 lm: 49 w/o Battery: 107 x 77 x 50 mm (4-1/4 x 3 x 2")	w/ BL1041B, at 300 lm: 17 w/ BL1041B, at 150 lm: 29 w/o Battery: 92 x 54 x 47 mm (3-5/8 x 2-1/8 x 1-7/8")
Dimensions (L x W x H)			
Net weight	0.19 kg (0.42 lbs.)	0.21 kg (0.46 lbs.)	0.29 kg (0.13 lbs.)

Standard Equipment : Warm color cover

not covered by EPTA-Procedure

Items of standard equipment and specifications may vary by country or area.

### Makita Singapore Pte Ltd

7, Changi South Street 3, Singapore 486348  
Phone : +65-6546-8700 Fax : +65-6546-8711  
Email : msgproductteam@makita.com.sg  
Website : www.makita.com.sg  
Facebook : www.facebook.com/MakitaSG



**f** MakitaSG



VISIT OUR WEBSITE



DOWNLOAD LEAFLET

PRINTED IN SINGAPORE