

Accessories

Shoulder strap assembly
Comfort
Part No.122A37-4



Chisel blade
Part No. 199872-9
Blade dia.: 225mm



Protector 225 set MG
Part No. 1911Y0-3



Shredder blade
Part No. 199874-5
Blade dia.: 270mm



Protector set MG
Part No. 1911Y1-1



Brushcutter blade

	2-tooth blade	3-tooth blade	4-tooth blade
Blade dia			
255mm	197808-2	D-66020	B-14118

Plastic blade

	Plastic blade Set	Replacement plastic blade
Cutting width		
305mm	199868-0	199870-3



Trimmer head


Part No. 199884-2
Cord/Line: 2.7mm
Ref.: 105-M10L



Part No. 1911Y2-9
Cord/Line: 2.7mm
Ref.: 121-M10L





Four-leaf Spiral Nylon cord

Red	Size	Part No.
	2.7mmx15m	E-01828
	2.7mmx30m	E-01834








Charging Time

	 DC40RA	 DC40RC
*BL4020 2.0Ah 191L29-0	22 min	30 min
*BL4025 2.5Ah 191B36-3	28 min	38 min
*BL4040 4.0Ah 191B26-6	45 min	67 min
*BL4050F 5.0Ah 191L47-8	50 min	85 min
*BL4080F 8.0Ah 191X65-8	76 min	170 min

*1 Recommended battery

Cordless Grass Trimmer

UR013G

 Variable Speed	Cutting Width	Metal blade: 255 mm (10") Chisel blade: 225 mm (8-7/8") Nylon Cutting Head: 450 mm (17-3/4")
 Brake		Shredder blade: 270 mm (8-7/8")
 Grass tangle removing function	No Load Speed (RPM)	Plastic Blade: 3,500-6,700 Metal blade: 3,500-5,000 Nylon Cutting Head: 3,500-5,000
 Constant Speed	Spindle size	M10 x 1.25 LH
 Soft Start	Dimensions (L x W x H)	Tool only: 1,863 x 690 x 546 mm (73-1/2 x 27-1/4 x 21-1/2") w/ Nylon cutting head and BL4080F: 1,966 x 690 x 546 mm (77-1/2 x 27-1/4 x 21-1/2")
	Net weight	5.9 - 7.2 kg (13.0 - 15.9 lbs.)

Standard Equipment: Metal blade/ Nylon cutting head / Plastic blade, Tool cover, Accessory bag, Hex wrench, Box driver, Shoulder belt, Battery, Charger

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table. Items of standard equipment and specifications may vary by country or area.

Makita Singapore Pte Ltd

7, Changi South Street 3, Singapore 486348
Phone : +65-6546-8700 Fax : +65-6546-8711
Email : msgproductteam@makita.com.sg
Website : www.makita.com.sg
Facebook : www.facebook.com/MakitaSG



MakitaSG



VISIT OUR WEBSITE



DOWNLOAD LEAFLET

PRINTED IN SINGAPORE



Max Output
1.5 kW (with BL4080F)

High power as 35cc engine tool



Multi functional control panel: near right hand position for easy access and operation



Indication of Grass tangles removing function

High-torque mode indicator

Mode selection button

Main power button

Variable speed control by lever

Enables user to adjust to desired speed and to hold on the speed.

Offset bike Handle



Trigger switch

Rigid ø25.4mm shaft pipe

ensures high rigidity equivalent to that of 35 mL class

Compatible with ø450mm Nylon cutting head

High output power




BL MOTOR

Max Output
1.5 kW
(with BL4080F)

AFT

Active Feedback sensing Technology

Torque limiter turns the motor off if the tool is suddenly forced to lock

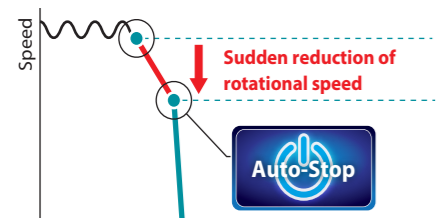

Time

High-torque mode

- Applicable to heavy duty operation.
- Recommended for heavy-duty operation where particularly high torque is required, such as shredding operation.

Low noise

Model UR013G
(w/ Plastic blade)

95 dB(A)

Guaranteed value according to European Outdoor Noise Directive 2000/14/EC (with the blade which generates the highest noise levels)

Run Time

Model UR013G

81-11 min


with Nylon cutting head and BL4050F on a single full battery charge / No load

IPX4-compatible



Enhanced Dust and Drip-proof Performance

Tool-less handle angle adjustment

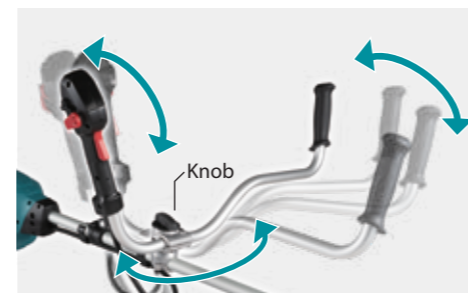

Left/right separate type bike handle

Shredder blade/ Chisel blade can be used.




270mm Shredder blade



225mm Chisel blade

Grass tangles removing function

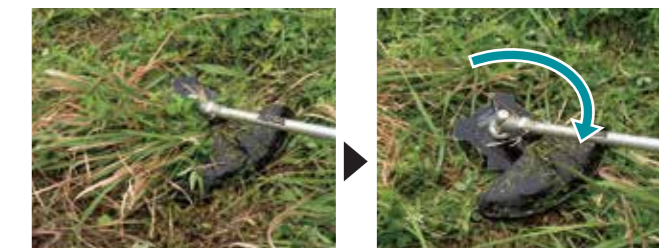

Reverse rotation or Grass tangles removing function