

Various options

Cyclone jet nozzle set
A spiral jet is ejected. Suitable for removing stubborn dirt.

Cyclone guard set
Reduces splash back when cleaning corners with the cyclone jet nozzle.

Variospray nozzle set
Variospray nozzle ext. set
Jet pressure can be adjusted by rotating the nozzle.

Variospray lance set
Jet pressure can be adjusted by rotating the nozzle.

Variable nozzle set
Jet width can be adjusted from 0° to 25° by rotating the front end of the nozzle.

Foam nozzle set
Detergent can be sprayed as foam.

Wash brush set
A nozzle equipped with a brush. Useful for washing out dirt while scrubbing with brush.

Rotating brush set
Three brushes inside rotate slowly when ejecting the jet. Suitable for cleaning light dirt on an exterior wall, car body, bath tub, etc.

Under body spray lance set
An extra long spray lance with angled nozzle. Best for cleaning hard-to-reach areas such as car under body and roof gutter.

Extension pipe set
Pipes to extend the length of the trigger gun. Three different lengths are available by changing the number of the pipes to be used.

Accessory joint set
A joint to connect with a nozzle from other model.

High pressure extension hose
5m, 8m, 10m
Total length up to 20m
Extension hose to connect the high pressure washer body with the trigger gun.

High pressure hose
Length: 5m (PVC), 10m (PVC), 10m (Rubber)

Twist prevention joint set
Prevents the high-pressure hose from being twisted.

One touch joint set
For commercial hose connection


Hose assembly set
Length: 3m
A hose assembly to connect a faucet to the product, or the strainer assembly to the product.

Strainer assembly set
A strainer assembly to supply water from a tank or reservoir. Use the hose assembly to connect to the product.

Self-suction hose set
Replace the water hose with this set to supply water from a tank or reservoir.

Absorption connector G3/4
With filter

Pipe cleaning hose
10m, 15m
For cleaning and unclogging plumbing and downpipes.

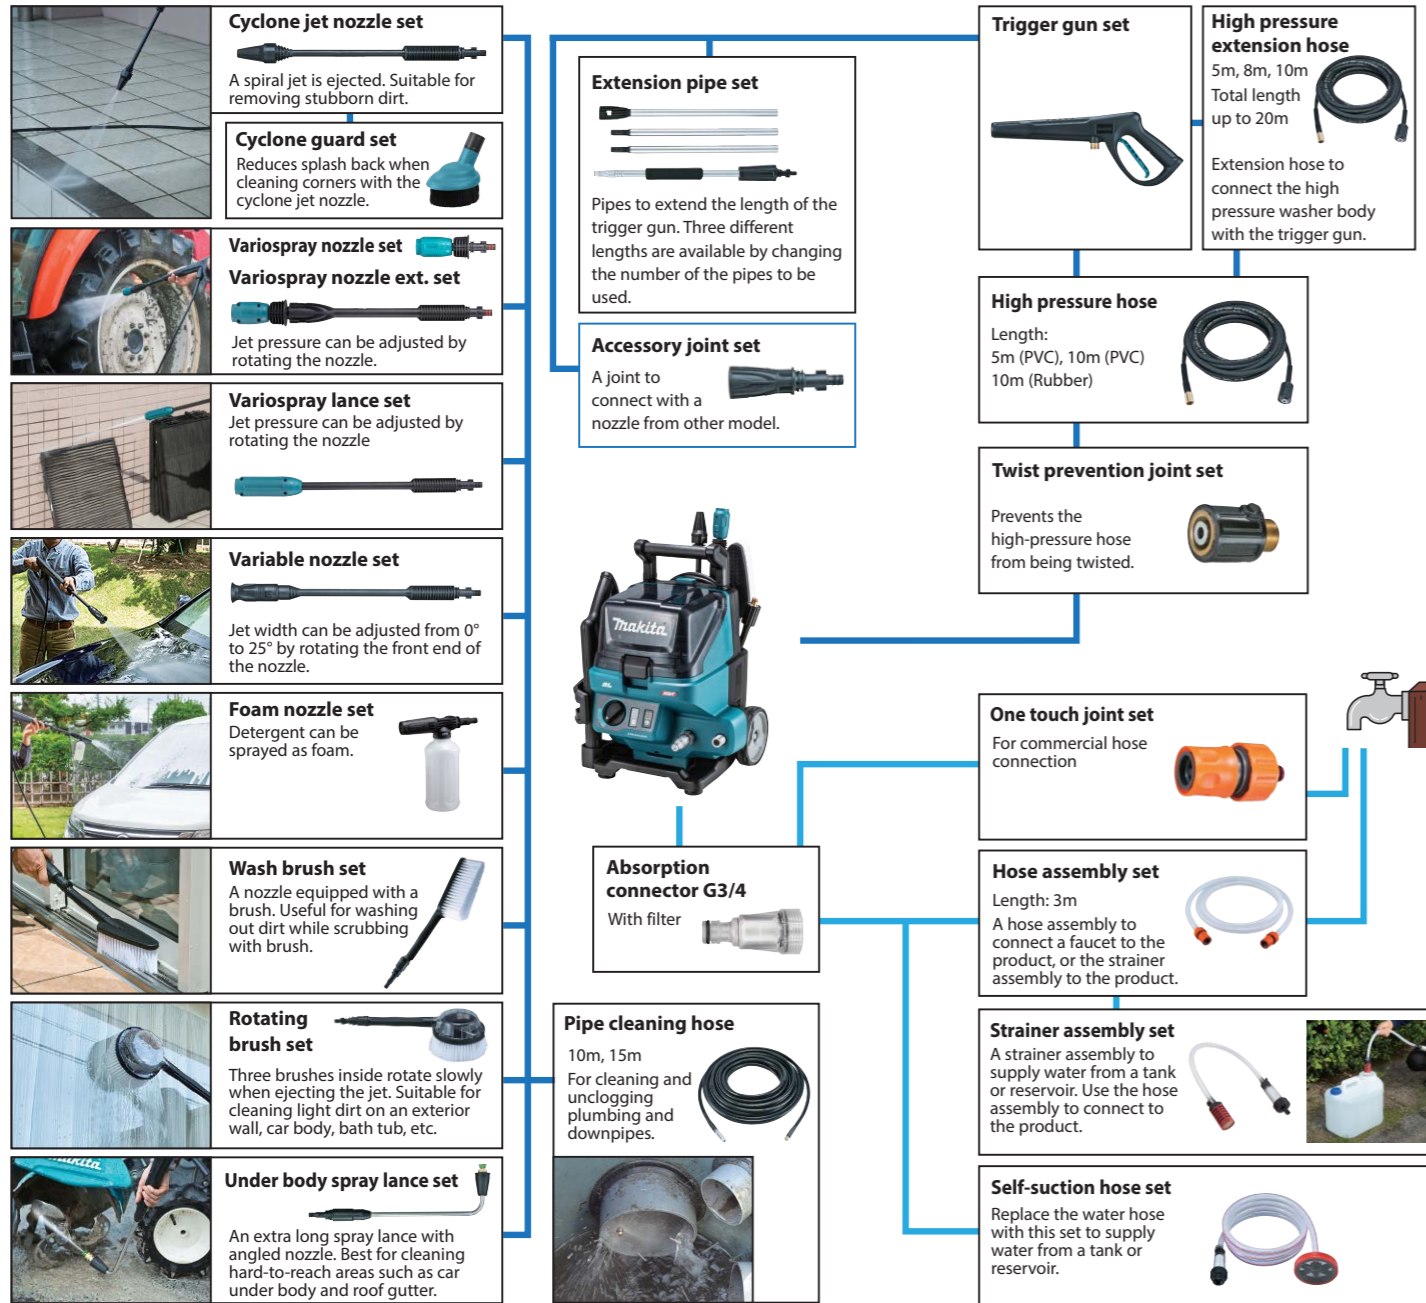

Charging Time

	DC40RA	DC40RC
BL4020 2.0Ah 191L29-0	22 min	30 min
BL4025 2.5Ah 191B36-3	28 min	38 min
BL4040/F 4.0Ah 191B26-6	45 min	67 min
*BL4050F 5.0Ah 191L47-8	50 min	85 min
*BL4080F 8.0Ah 191X65-8	76 min	170 min

*1 Recommended battery

Cordless High Pressure Washer

HW001G

- Electronic 3-Speed
- Anti-restart function

Standard Equipment:

Trigger gun set, High pressure hose 5m, Strainer assembly set, Absorption connector G3/4, Cleaner pin, Variospray nozzle set*1, Extension*1, Variospray lance set*1, Cyclone jet nozzle set*1, Variable nozzle set*1, Foam nozzle set*1, Wash brush set (Vertical form)*1, Hose assembly set*1, Hose clamp*1, Battery, Charger
*1 Country specific

Max. Flow Rate	7.0 L/min
Regular Flow Rate	Mode 1/2/3: 3.0/4.2/5.5 L/min
Max Permissible Pressure	11.5 MPa
Regular Pressure	Mode 1/2/3: 3.0/5.5/8.5 MPa
Max Feed Temperature	40 °C
Max Suction Height	1 m
Max Run Time	w/ BL4050F x2: Mode 1/2/3: 60/30/18 min
Hose Length	5 m
Noise level	84 dB(A)
Dimensions (L x W x H)	334 x 383 x 520mm (13-1/2 x 15-1/8 x 20-1/2")
Net weight	10.3 - 13.4 kg (22.7 - 29.5 lbs.)

The weight may differ depending on the attachment(s), including the battery cartridge.

The lightest and heaviest combination, according are shown in the table.

Items of standard equipment and specifications may vary by country or area.



Max. permissible pressure

11.5 MPa

Makita Singapore Pte Ltd

7, Changi South Street 3, Singapore 486348
Phone : +65-6546-8700 Fax : +65-6546-8711
Email : msgproductteam@makita.com.sg
Website : www.makita.com.sg
Facebook : www.facebook.com/MakitaSG



MakitaSG



VISIT OUR WEBSITE



DOWNLOAD LEAFLET

PRINTED IN SINGAPORE



Two in parallel or one

Good mobility and transportability



Large diameter wheels

Equipped with $\phi 140\text{mm}$ wheels, allowing for good mobility even on bumpy road surfaces.



BL MOTOR

High power brushless motor

IPX5

rated for weather and water resistance



Telescopic handle for easy transportation and storage



3 operation modes; operation mode can be selected to suit the contamination degree of the object to be cleaned.

Self-priming function

- Water can be supplied not only from faucet but also from water reservoirs, such as poly tanks, large buckets, using this function.
- Max suction height: 1m
- Minimal water level: 15mm
- No need to operate air drain valve



Max permissible pressure **11.5** MPa

3 operation modes

Mode With Vario-spray nozzle	Mode 3	Mode 2	Mode 1
Regular pressure	8.5Mpa	5.5Mpa	3.0Mpa
Regular flow rate	5.5L/min	4.2L/min	3.0L/min
Continuous use*	18min	30min	60min
Examples of recommended work	Washing of building exterior, etc.	Washing of vehicles, farm equipment, etc.	Light washing work

* (approx) on fully charged batteries (with two BL4050F batteries)



Accessory storage

Side section: Trigger gun
Rear section: High pressure hose, Foam nozzle, Lance



NEW Foam nozzle set

- New foam nozzle with improved foaming performance
- Bottle capacity: 350mL

