




Heat Gun Series HG6531C / HG6530V HG6031V / HG6030 / HG5030

For Various Applications

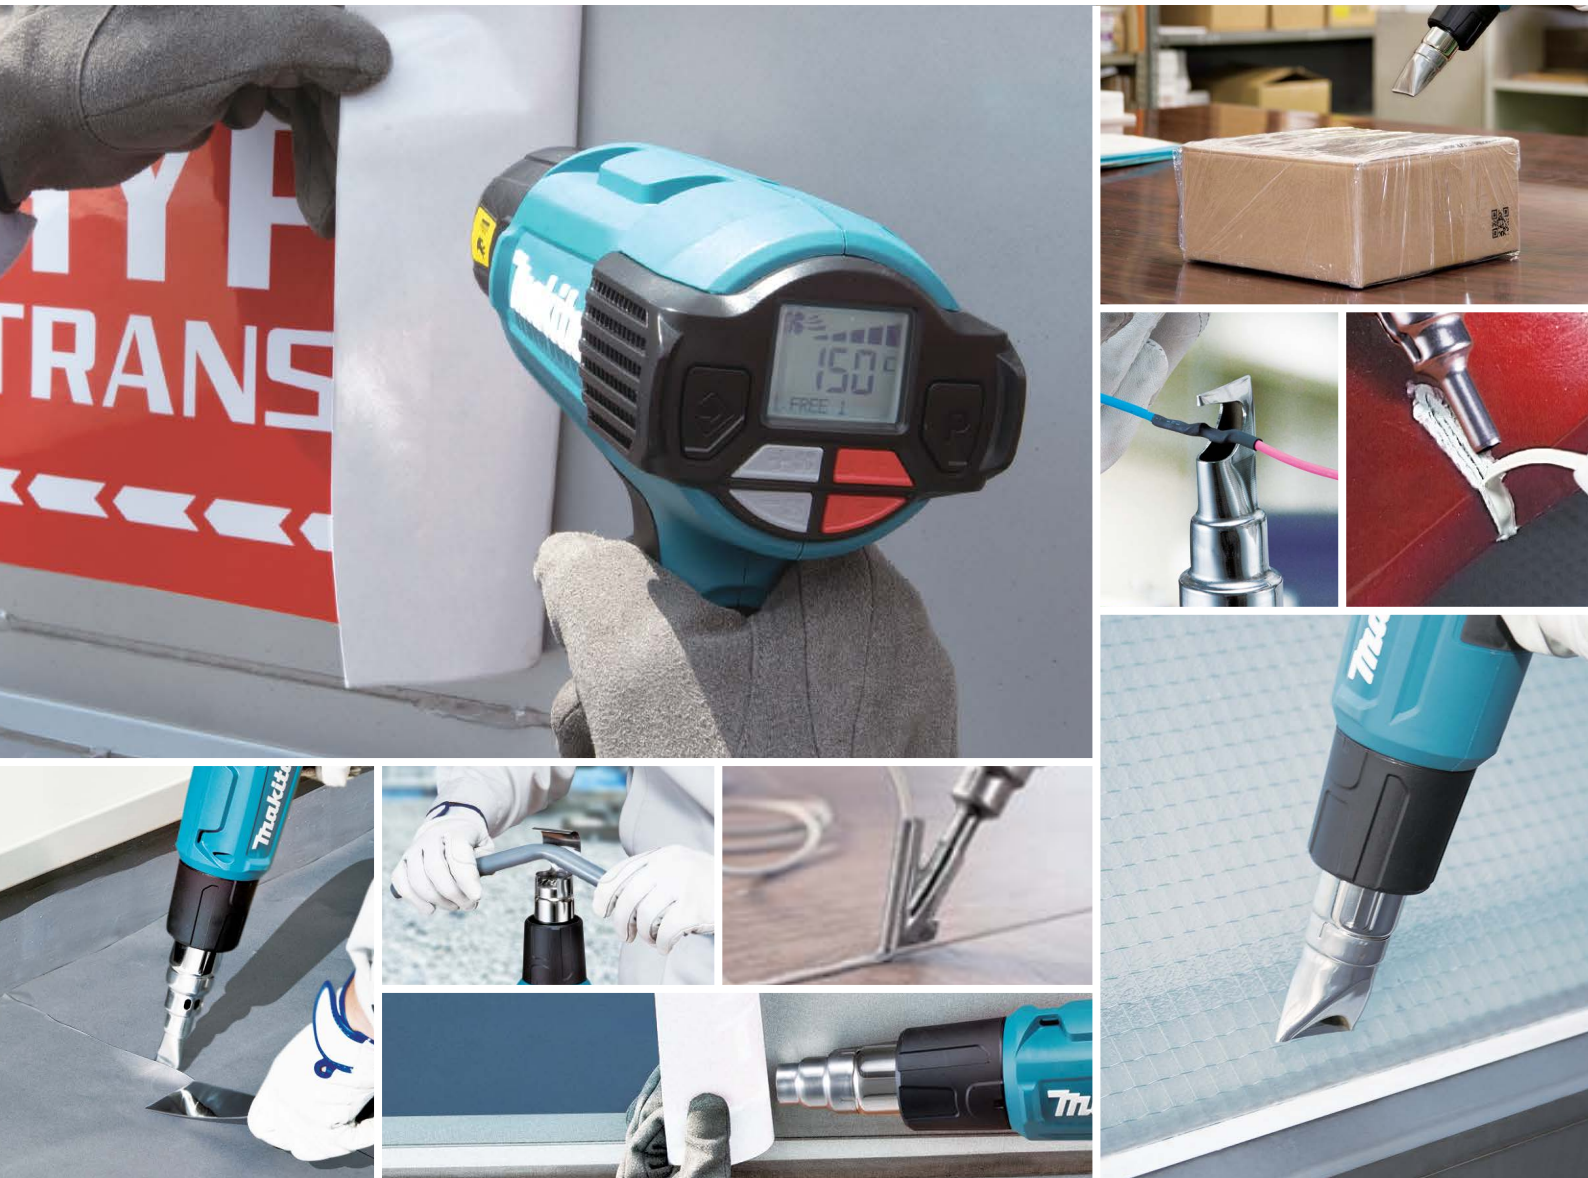

Heat Gun Line-ups

HG6531C **new**



Air flow volume adjustment



5 stages

Temperature adjustment



by every 5 °C

HG6530V **new**



3 stages



by every 10 °C

HG6031V



2 stages



9 stages

HG6030



3 stages



2 stages + Cooling mode

HG5030




2 stages




2 stages

| | HG6531C | HG6530V | HG6031V | HG6030 | HG5030 |
|-------------------------------|--------------------|--------------------|--------------|-------------------------|--------------|
| Temperature setting | Push button switch | Push button switch | Dial | Slide switch | Slide switch |
| Temperature adjustment | by every 5 °C | by every 10 °C | 9 stages | 2 stages + Cooling mode | 2 stages |
| Temperature : °C | 50 - 650 | 50 - 650 | 50 - 600 | 50/300/600 | 350/500 |
| Air flow setting | Push button switch | Slide switch | Slide switch | Slide switch | Slide switch |
| Air flow adjustment | 5 stages | 3 stages | 2 stages | 3 stages | 2 stages |
| Air flow : (L/min) | 200 - 550 | 500*/280/550 | 250/500 | 250*/250/500 | 300/500 |

*Cooling mode

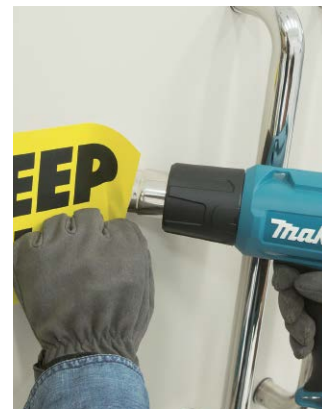

HG6531C new

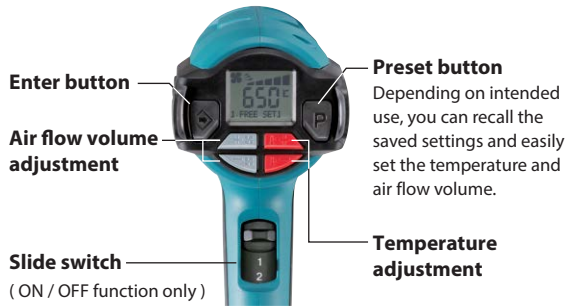

HG6530V new



Easy-to-operate slide switch

Various optional nozzles

Diameter of the joint portion :
34.5mm (1-3/8")

Fast cooling down at 50°C

HG6530V / HG6531C / HG6030 / HG6031V

Wide Variety of Accessories

Glass protection nozzle



Wide-slot nozzle




Reflector nozzle



Reduction nozzle 20




Overlap welding nozzle




Solder sleeves reflector





Welding nozzle




Pressure roller



Speed welding nozzle



Scraper



Scraper set



Heat Gun

HG6531C / HG6530V / HG6031V / HG6030 / HG5030

| | HG6531C | HG6530V | HG6031V | HG6030 | HG5030 |
|--------------------|------------------------------------------------------------------------|----------------------------------------------------------------|------------------------------------------|----------------------------------------------|------------------------------------------|
| Double Insulation | Continuous rating input 2,000W | 2,000W | 1,800W | 1,800W | 1,600W |
| Variable Speed | Air Temperature (°C) 50 - 650 | 50 - 650 | Stage 1: 50 - 400 Stage 2: 100 - 600 | Stage 1: 50 Stage 2: 300 Stage 3: 600 | Stage 1: 350 Stage 2: 500 |
| Electronic 3-Speed | Air Flow 200 - 550 L/min | Stage 1: 500 L/min Stage 2: 280 L/min Stage 3: 550 L/min | Stage 1: 250 Stage 2: 500 | Stage 1: 250 Stage 2: 250 Stage 3: 500 | Stage 1: 300 Stage 2: 500 |
| Carrying Case | Dimensions (L x W x H) 257x85x206 mm (10-1/8"x3-3/8"x8-1/8") | 257x85x206 mm (10-1/8"x3-3/8"x8-1/8") | 257x85x206 mm (10-1/8"x3-3/8"x8-1/8") | 233x80x208 mm (9-1/8"x3-1/8"x8-3/16") | 233x80x208 mm (9-1/8"x3-1/8"x8-3/16") |
| | Net weight 0.71 kg (1.6 lbs.) | 0.72 kg (1.6 lbs.) | 0.67 kg (1.5 lbs) | 0.57 kg (1.3 lbs) | 0.56 kg (1.2 lbs) |
| | Power supply cord 2.0 m (6.6 ft) | 2.0 m (6.6 ft) | 2.0 m (6.6 ft) | 2.0 m (6.6 ft) | 2.0 m (6.6 ft) |

Standard Equipment : HG6531C : Glass protection nozzle, Wide slot nozzle, Reflector nozzle (Nozzle B), Reduction nozzle, Overlap welding nozzle, Weld Nozzle, Solder sleeves reflector, Pressure roller
HG6530V : Glass protection nozzle, Wide slot nozzle, Reflector nozzle (Nozzle B)
HG6031V : Glass protection nozzle, Reflector nozzle, Reduction nozzle, Wide slot nozzle, Scraper

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table.

Items of standard equipment and specifications may vary by country or area.

Makita Singapore Pte Ltd

7, Changi South Street 3, Singapore 486348
Phone : +65-6546-8700 Fax : +65-6546-8711
Email : msgproductteam@makita.com.sg
Website : www.makita.com.sg
Facebook : www.facebook.com/MakitaSG



MakitaSG



VISIT OUR WEBSITE



DOWNLOAD LEAFLET

PRINTED IN SINGAPORE