



Battery Powered Wheelbarrow DCU601 / DCU602

Battery Powered Wheelbarrow series



DCU603

- Manual dump + Dump bucket
- Rust-free plastic bucket accepts wet loads.
- Inside bottom and front faces are angled for easy dump operation.



Bucket capacity	
Heaped capacity	200 L
Full liquid capacity	100 L

DCU604

- Manual dump + Pipe frame carrier
- Ideal for container boxes or bagged materials



DCU605

- Flat bucket
- Rust-free plastic bucket accepts wet loads.
- Optimal for operations not requiring dump function such as feeding in stables



Bucket capacity	
Heaped capacity	295 L
Full liquid capacity	250 L

Manual dump

designed for increased efficiency in unloading




Manual dump

High unloading efficiency



Telescopic loading platform



There is no screw on the inside of the bucket, allowing for smooth unloading operation using tool such as a clay-spade.



Capped nozzle for draining liquid is convenient when carrying liquid or cleaning the bucket.



Accessories

Tire 330 (single) set

Part No. 1911K4-7
For lawn and pavement



- Tubed tire
- Color: Black
- Includes one tire.

Gray tire 330 (single) set

Part No. 1911K5-5
For use in industrial sites, such as factory, where black tire marks on the floor are undesirable.



- Tubed tire
- Color: Gray
- Includes one tire.

Gray tire 210 (single) set

Part No. 1911K6-3
For use in industrial sites, such as factory, where black tire marks on the floor are undesirable.



- Tubed tire
- Color: Gray
- Includes one tire.

Carrier set

Part No. 191B67-2
DCU602 only

- Pipe frame carrier
- Variable-size loading platform



DCU601 Electric lift type



DCU602 Electric dump type



Charging Time

Model	Fast Charging	
	DC18RC	DC18RD
BL1815N 1.5Ah 196449-1	15 min	30 min
BL1820B 2.0Ah 197254-9	24 min	45 min
BL1830B 3.0Ah 197599-5	22 min	60 min
BL1850B 5.0Ah 197280-8	45 min	110 min
BL1860B 6.0Ah 197422-4	55 min	130 min

Battery Powered Wheelbarrow DCU601 / DCU602

Variable Speed	Traveling speed	Forward: 5.0, 3.5, 1.5 km/h Reverse: 1.0 km/h
Brake	Potential travel distance	7.2 km (with four BL1860B batteries, on flat ground, with lights off, loaded with 300 kg, at 5.0 km/h)
Reversing	Continuous run time on full battery charge	100 min (with four BL1860B batteries, on flat ground, with lights off, loaded with 300 kg, at 5.0 km/h)
Electronic 3-Speed	Max load capacity	Flat ground (0 - 3°): 300 kg (661 lbs), Slope (3 - 12°): 180 kg (397 lbs)
Constant Speed	Max climbing capacity	12°
Soft Start	Tire size	Front / Rear: 330 / 210 mm (13 / 8-1/4")
Built-in Job Light	Handle height adjustment	740 / 780 / 820 / 860 / 900 / 940 / 980 mm (29-1/8 / 30-3/4 / 32-1/4 / 33-3/4 / 35-1/2 / 37 / 38-1/2")
	Dimensions (L x W x H)	DCU601: When carrier is installed, during operation: 1,400 x 730 x 820 - 1,260 mm (55 x 28-3/4 x 32-1/4 - 49-1/2") DCU602: When carrier is installed, during operation: 1,480 x 730 x 820 - 1,260 mm (58-1/4 x 28-3/4 x 32-1/4 - 49-1/2")
	Net weight	DCU601: 145 kg (320 lbs.) DCU602: 147 kg (324 lbs.)

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table. Items of standard equipment and specifications may vary by country or area.

Makita Singapore Pte Ltd

7, Changi South Street 3, Singapore 486348
Phone : +65-6546-8700 Fax : +65-6546-8711
Email : msgproductteam@makita.com.sg
Website : www.makita.com.sg
Facebook : www.facebook.com/MakitaSG



MakitaSG



VISIT OUR WEBSITE



DOWNLOAD LEAFLET

PRINTED IN SINGAPORE



Electric lift type



Electric lift type

DCU601



Electric lift type



(elevated to 1,020mm in approximately 30 seconds.)

- The electric lift is limited to use on a flat ground, therefore, the machine is equipped with a level gauge to check the leveling of the machine.




Compatible with various sizes of loads

The front, left, and right guards are designed to be easily lowered below the flat frame by lifting and sliding them, allowing for easy loading and unloading while dragging loads without lifting up them.



Loading platform size: 965 x 645 mm (L x W)

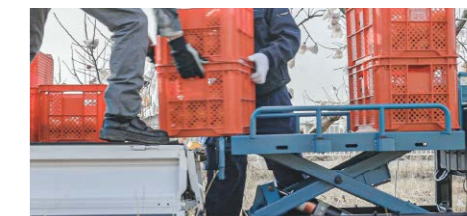

Electric dump type



Electric dump type

DCU602



Electric dump

- Reduces workload when dumping soil and other materials on the ground that are too heavy to lift manually.



[Tilts electrically up to 75°]
(Tilts to 75° in approx. 30 seconds.)



[Can be manually tilted for more than 75°]

- The electric dump is limited to use on a flat ground, therefore, the machine is equipped with a level gauge to check the leveling of the machine.



Bucket capacity	
Heaped capacity	Full liquid capacity
200 L	100 L

Max load capacity
on flat ground (0 - 3 degrees)

300 kg

on slope (3 - 12 degrees)

180 kg

Traveling distance **7.2 km**

with BL1860B x 4
On flat ground, with lights off, loaded with 300kg, at 5.0km/h

Traveling speed change

- Selection of 3 Forward speeds and F/R rotation by push button
- Stepless variable speed control by switch trigger in each range

Forward	Reverse
3 speeds (1.5/3.5/5.0 km/h)	1 speed (1.0 km/h)

Max climbing ability

12°



Hand brake lever

- Brake for speed reduction while driving the wheelbarrow
- Can be used as a parking brake by locking this lever.



Electric brake

- You can minimize the chance of load collapse by releasing the switch trigger to activate soft electric brake.

Electromagnetic brake


- Powerful electromagnetic brake is activated to keep the motor braked when the driving speed decreases almost to 0km.

High power
Brushless motor **BL MOTOR**




Tilt mechanism of rear wheels

Rear wheel axle is designed to tilt to enable Front wheels (driving wheels) to stably touch the ground for reliable driving even on bumpy road surfaces.

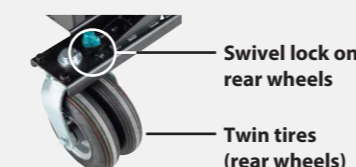


Swivel lock on rear wheels

Twin tires (rear wheels)




Headlights

- turn off automatically with no operation for 10 minutes.



Tool-less handle height adjustment

Handle height can be adjusted according to user's height without tool simply by turning 2 knob screws.




Neutral mode

shuts off the power transmission between the motor shaft and the axle in case of no battery installation, low battery capacity or broken motor, enabling to drive the wheelbarrow manually.

*This function is for emergencies. Refer to the instruction manual for details.




Two or four batteries can be installed for a 2-series / 2-parallel connection for a secure amount of work.



XPT

IPX4-compatible

High water-resistance allows to operate the machine even if it is wet with water.



Power button

3-speed selection

F/R selection



Warning beeper

Switch trigger

Red LED taillight