

Comfort/Lifestyle

Cordless Radio with Lantern



Cordless LED Worklight



LED Flashlight



Cordless Worklight



Job Site Radio



Cordless Fan



Cordless Kettle



Cordless Coffee Maker



Cordless Microwave



Charging Time

40V max	Fast Charging		18V LITHIUM-ION	Fast Charging	
	DC40RA	DC40RC		DC18RC	DC18RD
BL4020 2.0Ah 191L29-0	22 min	30 min	BL1815N 1.5Ah 196449-1	15 min	30 min
*BL4025 2.5Ah 191B36-3	28 min	38 min	BL1820B 2.0Ah 197254-9	24 min	45 min
*BL4040 4.0Ah 191B26-6	45 min	67 min	BL1830B 3.0Ah 197599-5	22 min	60 min
*BL4050F 5.0Ah 191L47-8	50 min	85 min	BL1850B 5.0Ah 197280-8	45 min	110 min
BL4080F 8.0Ah 191X65-8	76 min	170 min	BL1860B 6.0Ah 197422-4	55 min	130 min



Top cover that can be opened from both sides

photo: CW004G

photo: CW004G

Cordless Cooler & Warmer Box

CW003G / CW001G / CW004G / CW002G


	CW003G	CW001G	CW004G	CW002G
Capacity	7 L (1.8 gal)	20 L (5.3 gal)	29 L (7.7 gal)	50 L (13.2 gal)
Temperature setting	14 settings: -18/-15/-10/-5/0/5/10/30/35/40/45/50/55/60°C (0/5/15/25/30/40/50/85/95/105/115/120/130/140°F)	14 settings: -18/-15/-10/-5/0/5/10/30/35/40/45/50/55/60°C (0/5/15/25/30/40/50/85/95/105/115/120/130/140°F)	17 settings: -18/-15/-10/-5/0/5/10/15/20/25/30/35/40/45/50/55/60°C (0/5/15/25/30/40/50/60/70/75/85/95/105/115/120/130/140°F) (Settable max temperature difference between two rooms: 30°C)	14 settings: -18/-15/-10/-5/0/5/10/30/35/40/45/50/55/60°C (0/5/15/25/30/40/50/85/95/105/115/120/130/140°F)
Run time (hrs)	w/ BL4040, -18 / 5 / 60°C: 5.5 / 13.5 / 5.5	w/ BL4050Fx2, -18 / 5 / 60°C: 10 / 28 / 8.5	w/ BL4050Fx2, -18 / 5 / 60°C: 12.5 / 30.0 / 11.5	w/ BL4050Fx2, -18 / 5 / 60°C: 10 / 24.5 / 6
Cord length	AC adaptor / Cigar socket cable: 2 / 2.5 m (6.5 / 8.2 ft)	AC adaptor / Cigar socket cable: 2 / 2.5 m (6.5 / 8.2 ft)	AC adaptor / Cigar socket cable: 2.2 / 2.5 m (7.2 / 8.2 ft)	AC adaptor / Cigar socket cable: 2 / 2.5 m (6.5 / 8.2 ft)
Wheel size	-	100 mm	130 mm	130 mm
Storage dimensions (L x W x H)	210 x 150 x 220 mm (8-1/4 x 5-7/8 x 8-5/8")	322 x 240 x 261 mm (12-3/4 x 9-1/2 x 10-1/4")	343 x 240 x 338 mm (13-1/2 x 9-1/2 x 13-3/4")	500 x 320 x 320 mm (19-3/4 x 12-5/8 x 12-5/8")
Dimensions (L x W x H)	456 x 245 x 308 mm (18 x 9-5/8 x 12-1/8")	663 x 341 x 372 mm (26-1/8 x 13-3/8 x 14-5/8")	676 x 345 x 471 mm (26-5/8 x 13-5/8 x 18-1/2")	867 x 465 x 476 mm (34-1/8 x 18-1/4 x 18-3/4")
Net weight	w/ Battery: 7.9 - 9.4 kg (17.4 - 20.7 lbs.)	w/ Battery: 13.8 - 16.1 kg (30.4 - 35.5 lbs.)	w/ Battery: 17.5 - 20.9 kg (38.6 - 46.1 lbs.)	w/ Battery: 25.6 - 29.0 kg (56.4 - 63.9 lbs.)

Standard Equipment: Shoulder belt (CW003G/CW001G/CW004G only), AC adaptor, Cigar socket cable, Inner tray (CW002G/CW004G only), Inner basket (CW004G only)

Not covered by EPTA-Procedure
Items of standard equipment and specifications may vary by country or area.

CW004G

Dual room mode is available by using the partition plate.

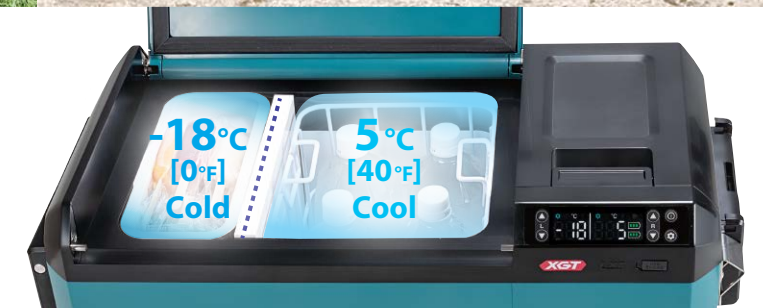

CW003G

Capacity
7 L

CW001G

two in parallel or one battery

Capacity
20 L

CW004G

two in parallel or one battery

Capacity
29 L

CW002G

two in parallel or one battery

Capacity
50 L



Makita Singapore Pte Ltd

7, Changi South Street 3, Singapore 486348
Phone : +65-6546-8700 Fax : +65-6546-8711
Email : msgproductteam@makita.com.sg
Website : www.makita.com.sg
Facebook : www.facebook.com/MakitaSG



MakitaSG



VISIT OUR WEBSITE




DOWNLOAD LEAFLET

PRINTED IN SINGAPORE



-18°C ~ 60°C
[0°F ~ 140°F]



Cool storage
-18°C ~ 10°C [0°F ~ 50°F]



Hot storage
30°C ~ 60°C [85°F ~ 140°F]



Compatible with 4 power sources




*Also can be powered by the combination of one XGT battery and one LXT battery. (CW002G/CW004G/CW001G only)

USB output port



IPX4-rated water resistance



CW004G

17 inside temperature settings

29L
(7.7gal)


Left **9L**
(2.4gal) | Right **18L**
(4.8gal)



The maximum number of 2L plastic bottles that can be stored upright is:

- Six in single room mode
- Two in left and four in right rooms in dual room mode

Dual room mode is available by using the partition plate.



- Two different temperature settings can be made according to application requirements by dividing the storage box into two rooms with the partition plate.
- Even in dual room mode, only desired one of the two rooms can operate independently as in single room mode.
- Single room mode can be changed to dual room mode automatically by setting the partition plate.
- Settable maximum difference between the temperatures of two storage rooms: 30°C

Inner tray



Three 350mL cans can be stored upright.

Inner basket



Four 2L plastic bottles can be stored upright.

Hooks for hanging plastic dust bag



Hooks are added to the carry handle for hanging plastic dust bag, etc.

Pull drag handle that can be locked at 110°



for easier transportation on casters.

Detachable top cover



allows for easy cleaning of the top cover and the inside of the storage box.

Drain cock



When cleaning the storage box, open the cap to drain water from the box.

Bottle opener



Carry handle on both sides



Work amount on full battery charge

with two BL4050F batteries / When used as one room

-18°C [0°F] about **12.5 h** | 5°C [40°F] about **30 h** | 60°C [140°F] about **11.5 h**



CW003G

Compact design

Convenient size for one to several people.

14 inside temperature settings

7L
(1.8gal)



Able to store six 500mL plastic bottles vertically (up to 220mm in height).

Work amount on full battery charge

with BL4040 batteries


-18°C [0°F] about **5.5 h** | 5°C [40°F] about **13.5 h** | 60°C [140°F] about **5.5 h**



CW001G

14 inside temperature settings

20L
(5.3gal)



Able to store up to four 2L plastic bottles or twenty 500mL plastic bottles.

Work amount on full battery charge

with two BL4050F batteries

-18°C [0°F] about **10 h** | 5°C [40°F] about **28 h** | 60°C [140°F] about **8.5 h**



CW002G

The large capacity of 50L, which can be used by multiple persons, enables to keep a lot of items cold or hot.

14 inside temperature settings

50L
(13.2gal)




About 15 x 2L PET bottles can be stored vertically.

Work amount on full battery charge

with two BL4050F batteries

-18°C [0°F] about **10 h** | 5°C [40°F] about **24.5 h** | 60°C [140°F] about **6 h**

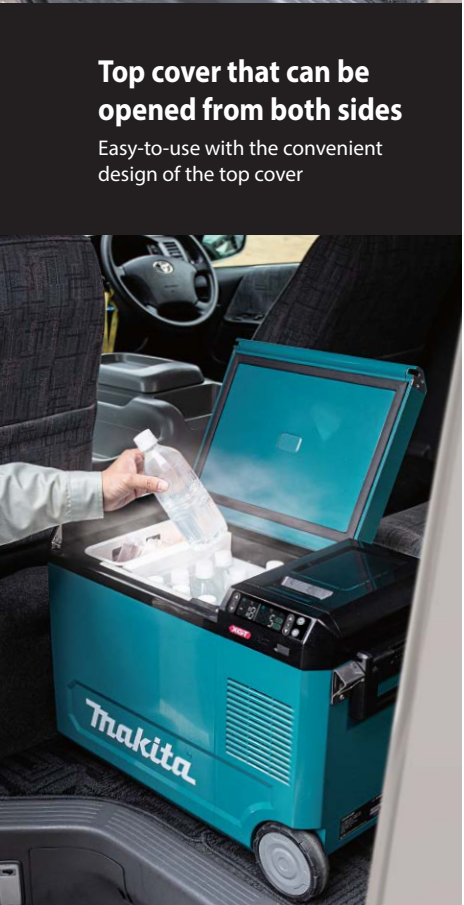

Top cover that can be opened from both sides

Easy-to-use with the convenient design of the top cover