



**Accessories**

**Adapter pipe 85-72 set**

Part No. 191L96-5



**Flat nozzle set**

Part No. 197889-6

Narrow profile improves air speed for removing heavier debris such as wet leaves



**Battery Powered Blower UB003C**  
**Portable Power Pack PDC1500**



**UB003C**  
Continuous run time (approx)  
on a full battery charge  
with PDC1500  
**60 min**  
Maximum speed mode or maximum  
speed with the cruise control lever /  
With standard nozzle attached

**Portable Power Pack**

**Portable Power Pack**

**PDC1500** **PDC1200**

**Charger DC4001**  
Charging time  
PDC1500: 450 min.  
PDC1200: 360 min.

**PDC01**

**Powered by up to four 18V LXT batteries**

**Battery Powered**

Blower **UB003C** Grass Trimmer **UR202C**  
Backpack Blower **UB002C** Lawn mower **LM001C**

**Adapter set**

**40Vmax**  
Part No. 191N62-4

Adapter between Battery box of Portable power pack and Product on 40Vmax XGT platform

**18Vx2**  
Part No. 191J51-5

Adapter between Battery box of Portable power pack and Product on 18Vx2 LXT platform

**18V**  
Part No. 191J50-7

Adapter between Battery box of Portable power pack and Product on 18V LXT platform \*PDC01 only

**Battery Powered Blower**

**UB003C**

	Variable Speed	Max air volume w/ End nozzle, w/ PDC1500, Max speed mode: 2.9 - 17.2 m <sup>3</sup> /min
	Anti-restart function	Max air velocity w/ End nozzle, w/ PDC1500, Max speed mode: 86.0 m/s
	Electronic 3-Speed	Avg. air velocity w/ End nozzle, w/ PDC1500, Max speed mode: 11.7 - 71.9 m/s
	Constant Speed	Blowing force w/ End nozzle, w/ PDC1500, Max speed mode: 0.7 - 24 N
		No load speed Mode1 / Mode2 / Mode3: 4,000-10,600 / 17,700 / 22,100 min <sup>-1</sup>
		Continuous use (approx.) on a full battery charge w/ End nozzle, w/ PDC1500, Max speed mode: 60 min
		Sound pressure level 82.2 dB(A)
		Sound power level 92.4 dB(A)
		Vibration level 2.5 m/s <sup>2</sup> or less
		Dimensions (L x W x H) w/ Nozzle: 913 - 1,013 x 178 x 298 mm (36 - 40 x 7 x 11-3/4")
		w/o Nozzle: 662 x 178 x 298 mm (26 x 7 x 11-3/4")
		Net weight 2.8 - 3.1 kg (6.2 - 6.8 lbs.)

Standard Equipment : End nozzle, Band assembly

Weight according to EPTA-Procedure 01/2014

Items of standard equipment and specifications may vary by country or area.

**Makita Singapore Pte Ltd**

7, Changi South Street 3, Singapore 486348  
Phone : +65-6546-8700 Fax : +65-6546-8711  
Email : msgproductteam@makita.com.sg  
Website : www.makita.com.sg  
Facebook : www.facebook.com/MakitaSG



VISIT OUR WEBSITE



DOWNLOAD LEAFLET

PRINTED IN SINGAPORE

**Portable Power Pack**

**PDC1500**

Capacity	43.55 Ah
Energy capacity	1,567.8 Wh
Number of cells	130
Charging time	450 min.
Dimensions (L x W x H)	w/o Harness: 369 x 312 x 131 mm (14-1/2 x 12-1/4 x 5-1/8")
Net weight	10.9 - 12.9 kg (24.0 - 28.4 lbs.)*
Power supply cord	Battery side: 1.2 m (3.9 ft) Adapter side: 0.6 m (2.0 ft)

\*not covered by EPTA-Procedure

Standard Equipment : Harness, Charger

**UB003C**

Average blowing force

**24 N**

Max air volume

**17.6 m<sup>3</sup>/min**

Max air velocity

**86.0 m/s**

Maximum speed mode or maximum speed with the cruise control lever, with PDC1500 / With standard nozzle attached



UB003C

UB003C

PDC1500

## High output power



## 1,500Wh-class high capacity

Portable Power Pack  
**PDC1500**



Charging time  
**450 min.**  
with DC4001


### More robust appearance and increased strength

- Achieved by:
- New stand with increased strength obtained by using a larger diameter metal pipe
  - Metalized junctions between battery and harness

### Reflectors



### Quickly removable harness

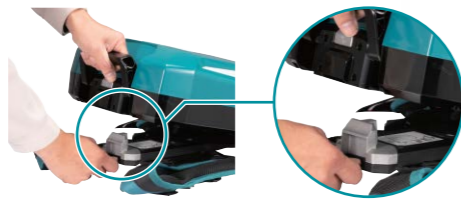

### Height-adjustable waist belt

The position of the waist belt can be adjusted for personal fit and comfort.



### Compatible with a wide range of applications

(both in backpack and stationary styles)



### Battery fuel gauge



## High power & Lightweight design

Net weight  
**2.8 kg**  
With End nozzle 72 and without Band assembly



### 3 Speed mode button



### Variable control trigger + Cruise control lever



Battery Powered Blower  
**UB003C**



### Best grip-to-frame angle



Hole on the bottom of housing for hanging the machine on a wall-mounted hook for storage



Easy-to-hold machine bottom design for added comfort and control in double handed operation



## Improvements for more comfortable backpacking experience



Plastic back plates have been extended up to the rear of user's shoulders to distribute the pressure on the shoulders.



Chest belt added to minimize the chance that both shoulder belts might slip outward.




Swivel mechanism on waist belt reduces user's fatigue. The waist belt section swivels around the fulcrum to adapt to the user's working posture.



## Nozzle reducing reaction force

The recoil of the machine tilting is reduced with the grip as the fulcrum since the reaction force is directed toward the grip by tilting the nozzle tip downward, therefore, the burden on the user's arm is reduced.

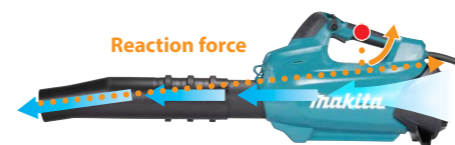

## 3-stage telescopic long nozzle



## Harness can be attached

The machine can be hung by connecting the band to the harness of PDC1500, therefore, the burden on the user's hand can be reduced.

