

















Powered by 40Vmax XGT Li-lon battery (two in parallel or one)



Max Pressure Max Flow Rate Pump Speed (RPM) Continuous use

(approx) on fully charged batteries Mode 3: 18 min

Max Feed Temperature High Pressure Hose 40 °C 5 m (16 ft.) Length Dimensions (L x W x H)

11.5 MPa 7.0 L/min Mode 1/Mode 2/Mode 3: 1,870/2,580/3,350 w BL4050F: Mode 1: 60 min Mode 2: 30 min

344x383x520 mm 8.5 kg (18.7 lbs.)

40Vmax 🕲 🚮 🕰 🗸 🗸 🗸 🗓 1 Z: Battery and Charger are sold separately



- Powered by 40Vmax XGT Li-lon battery (two in parallel or one)
- 140mm diameter large wheels enable to move even on bumpy road surfaces
- Good mobility and transportability
- 3 operation modes; operation mode can be selected to suit the contamination degree of the object to be cleaned
- Telescopic handle for easy transportation and storage
- New foam nozzle features a foaming mesh newly added to improve the foaming performance of detergent
- WetGuard/IPX5-compatible







- High power with 40Vmax specification
- Equipped with BL motor to increase cutting speed
- Can also cut aluminum and mild steel plates at high speed
- Improved stability when cutting
- Adoption of "new soft no-load", low noise and vibration except when cutting
- Speed adjustment dial 6-step switching with Lock-on switch
- Can be connected to a dust collector







JV002GM201(RM2J) / GZ Cordless Jig Saw

 ${\it 3~Orbital~settings+Straight~cutting, 6~speed~adjustment~dial}\\$



Capacity Wood: 135 mm (5-5/16") Mild Steel: 10 mm (3/8") Aluminum: 20 mm (25/32") Stroke length 26 mm (1") 0 - 3,500 0 - 45° Strokes per minute (S Bevel range Woodwork: 6 1m/s2 Vibration level Metalwork: 4.2m/s² Dimensions w/BL4025: 272×84×208mm Net weight 2.6 kg (5.7 lbs.)







Jig Saw Blade, Hex Wrench, Cover Plate, Dust Nozzle (country-specific), Dust Cover (country-specific), Battery, Charger, Z: Battery and Charger are sold separately

CE002G Dust Cordless Power Cutter collection rate makita or more Concrete cutting Inakita

- Dry cutting model
- Dust collection rate during operation is 90% or more in cutting concrete with vacuum cleaner connected
- Auto-start Wireless System (AWS) connects to compatible vacuum cleaners via Bluetooth
- Max cutting depth: 127mm (5")
- Active Feedback sensing Technology (AFT)
- Lock-off button minimizes accidental start up







CE002GZ (Dry) 355mm (14") Cordless Power Cutter

40Vmax X2 (80Vmax) XGT BL AFT AWS Cordless 355 mm Power Cutter, Electric Brake 355 mm (14") Wheel Diameter

Li-ion Ab 8.0 5.0 4.0 2.5 2.0



Max Cutting Capacity No Load Speed (RPM) Dimensions (L x W x H)

Net weight

127 mm (5") 4.200 w/BL4040: 825 x 272 x 487 mm (32-1/2 x 10-3/4 x 19-1/4") 13.1 - 15.1 kg

(28.9 - 33.3 lbs.)







Wrench, Ring, Hose clamp, Battery, Charger, Z: Battery and Charger are sold separately



- Compatible with 18Vx2 LXT, 40Vmax XGT, 36V direct power connection, High Output Power
- Energy capacity of 1,500Wh, Equipped with built-in battery cells
- Height-adjustable waist belt for personalized fit and comfort
- Quickly removable harness allows for use as a stationary power pack
- Main power switch with 8-hour auto-off function
- Battery fuel gauge indicates the battery status by four green LEDs
- Wet Guard / IPX4 compatible when used with the compatible tool / machine
- 7.5 hours to full charge with the charger DC4001



€XSI LXT IPX4 WG



- Powered by 40Vmax XGT/18V LXT, 12V/24V DC and AC power, up to two batteries can be installed simultaneously
- Two different temperature settings
- Top cover is designed to be opened from both sides, and also to be completely removable
- The inside of the storage box can be washed with water
- Inner tray (Three 350 mL cans) and Inner basket (Four 2 L plastic bottles), both can be stored upright







CW004GZ Cordless Cooler & Warmer Box

A combination of XGT battery and LXT battery is also accepted

Li-ion Ah 8.0 5.0 4.0 2.5 2.0

40Vmax 18V

40Vmax 18V x2

Harness, Charger * PDC1500A01 (1x 18V+18V Adaptor)



	X ⊝T	<u>[XT</u>	C
•			

29 L (7.7 gal) -18°C (0°F) 60°C (140°F) Capacity Cooling System Warming System 17 settings: -18/-15/-10/-5 /0/5/10/15/ 20/25/30/35/ 40/45/50/55/60°C w/BL4050Fx2, -18/5/ Run Time 60°C: 12.5/30.0/11.5 AC Adapter/ Cord Lenath Cigar Socket Cable: 2.2/2.5 m (7.2/8.2 ft) Storage Dimensions 343 x 240 x 338 mm 676 x 345 x 471 mm (26-5/8 x 13-5/8 x 18-1/2") Dimensions (LxWxH) 7.5 - 20.9 kg (38.6 - 46.1 lbs.)

Shoulder belt, AC adaptor, Cigar socket cable, Inner tray, Inner basket, Z: Battery and Charger are sold separately



- Powered by 40Vmax XGT Li-lon battery (two in parallel or one)
- Automatic battery switching

Trakita

- Toolless handle height adjustment (2 stages)
- Grass catcher capacity: 50L
- Large Front/Rear tires with wheel diameter of 180/180m
- Two different blades available for different applications: Vertical cutter and Thatching blade
- Highly durable vertical cutter and low vibration







UV001GZ Cordless Scarifier

Li-ion Ah 8.0 5.0 4.0 2.5 2.0

40Vmax XGT BL Cordless 380mm (15") Scarifier

Cutting width Working depth

Continuous run time on full battery charge

Actual mowing area on full battery charge No load speed (RPM)

Grass catcher capacity Dimensions (L x W x H)


Net weight

380 mm (15 ") -12 mm (-15/32") to 5 mm (+3/16") w/BL4080F x2.

Vertical cutter: 38 min Thatching blade: 41 min w/BL4080F x2. Vertical cutter: 500 m² Thatching blade: 510 m²

3,200 50 L 1,020-1,240 x 680 x 915-1,155 mm 18.7-23.8 kg (41.2-52.5 lbs.)

W CO SL XPT Vertical cutter, Thatching blade, Socket wrench, Grass catcher, Battery, Charger,

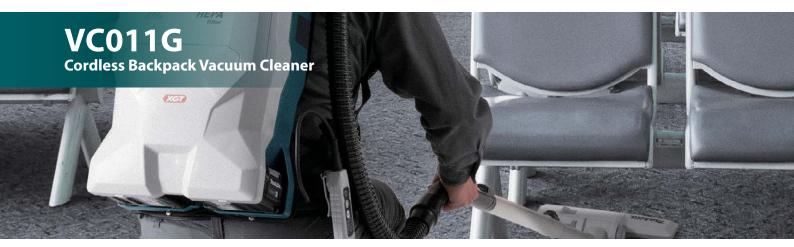







- Efficient cleaning work with large capacity 6L (paper pack) & battery with 2 parallel specifications
- Powerful suction power & low noise
- Clean exhaust with high performance HEPA filter
- Telescoping pipe (telescoping width 520-870mm)
- Mechanism to prevent forgetting to attach dust bag
- Ideal for cleaning large spaces such as lobbies, theaters, station premises, and commercial facilities

VC011GZ Cordless Backpack Vacuum Cleaner

40Vmax XGT BL Brushless Cordless HEPA Backpack Vacuum Cleane



Max Air Flow Max Sealed Suction Continuous use (approx.) on a full battery charae Suction Power

Capacity

Dimensions (LxWxH) Net weiaht

Paper Dust Baa: 6.0 L Cloth Dust Bag: 5.5 L 2.4 m³/min 20 kPa w/BL4050F x2: Mode 1/2/3/4: 260 / 130 / 75 / 40 min Mode 1/2/3/4: 25W/ 55W/ 100W/ 195W w/BL4040 x2: 301 x 185 x 526 mm (11-7/8 x 7-1/4 x 20-3/4 ") 6.4 - 9.5 kg (14.1-20.9 lbs.)









Hose, Hose band, Dust bag, Switching nozzle, Bent pipe with pipe locking mechanism, Aluminum telescopic pipe with pipe locking mechanism (country-specific), Long sash nozzle, Battery, Charger, Z: Battery and Charger are sold separately



- 40Vmax XGT / 18V, 14.4V LXT Li-lon batteries, AC power
- Self-righting design won't fall over even if tilted up to 80 degrees
- 3 brightness settings: 5,500 lumens on high mode, 3,000 lumens on medium mode or 1,500 lumens on low mode
- IP54 certified dust and water resistance
- LED color is daylight white
- Equipped with AC outlet for connecting up to 8 units together







ML010G 40Vmax, 18V, 14.4V / AC Cordless Area Worklight

New

40Vmax XGT / 18V, 14.4V LXT Li-Ion Cordless Area Worklight, 5,500 Lumens



Luminous flux

Illuminance (High / Med. / Low)

Continuous run time on full battery charge (High / Med. / Low)

Dimensions (L x W x H) Net weight

at 1 m from the light source: 550/300/150 lx at 3 m from the light source: 70/40/20 lx at 5 m from the light source: 25/15/7 lx High/Med./Low: 5,500/3,000/1,500 lm w/BL1860B x2: 4.5/8.5/16 hours w/BL4040 x2: 6.5/11/21 hours

veight 14.4 - 19.2 kg (31.7 - 42.3 lbs.)

AC power cord. Battery and Charger are sold separately









- Air flow volume of 120 m³/min, which is larger than our current model, has been achieved by 450 mm diameter fan and redesigned fan cover
- Compatible with 40Vmax / 18V Li-Ion battery /AC power
- Variable speed control dial switch
- Stepless air flow volume setting
- Fan cover can be removed for cleaning
- Can be mounted onto MAKPAC cart

CF003GZ 450mm (17-3/4") Cordless Fan

 $40 V max \ XGT \ / \ 18 V \ LXT \ Li-lon \ Cordless \ 450 \ mm \ (17-3/4") \ Fan$



Air velocity
Air flow
Fan diameter
Fan head angle
adjustment
Automatic oscillation

Continuous use (min.) w/o oscillation

Dimensions (LxWxH) Up: 90° / Down: 45° Left: 90' / Right: 90° Right: 60, 90, 120° Right: 60, 90, 120° W/BL4040: 115 / W/BL4080F: 230 / W/BL1860B: 90 W/O Battery: 312 x 633 x 770 mm (12-1/4x 25 x 30-1/4") W/O Battery: 7.9 kg (17.4 lbs.)

96-300 m/min

38-120 m³/min 450 mm (17-3/4")

AC Adaptor, Z: Battery and Charger are sold separately

W EXE LXI

40Vmax 18V










- Easy-to-operate handle lock levers
- Easier cutting height adjustment;
 - Easy-to-grip egg-shaped lever top
 - U-shaped notches, which provide positive stops for lever
- Less force required to turn on the mower
- Warning lamp for Battery capacity, High temperature and Overload
- Upright storage for space saving



40Vmax XGT BL Cordless 43 cm (17") Lawn Mower



Cutting Width 430 mm (17") 20 - 75 mm (13/16 - 2-15/16") Cutting Height Grass Box Capacity No Load Speed (RPM) 50 L 3,800 min ⁻¹ w/BL4080F: 52 min Continuous use (approx.) on a full battery charge

Wheel diameter 140 / 165 mm Dimensions (L x W x H) During operation: 1,390 - 1,440 x 460 x 990 - 1.020 mm Net weight

15.6 - 18.2 kg (34.4 - 40.1 lbs.)

Socket wrench, Blade, Mulching plug, Grass catcher, Battery, Charger, Z: Battery and Charger are sold separately



- Automatic chain lubrication minimizes the chance that saw chain will stall due to forgetting to supply chain oil
- Easy-to-use, lightweight and compact product enables easy pruning of garden or orchard trees
- Lock-off lever accessible from both sides
- Rear hand guard
- Movable guard covers the upper side of guide bar, and opens gradually wider as saw chain cuts deeper in branch







DUC150Z 150mm (6") Cordless Pruning Saw

New

Easy-to-use, compact product enables easy pruning of garden or orchard trees

Guide bar lenath

Li-ion Ab 6.0 5.0 3.0 1.5



Type: 80TXL Pitch: 0.325' Gauge: 1.1 mm (0.043") 8.0 m/s (480 m/min) Chain speed (1,570 FPM) Max cuttina lenath 161 mm Chain oil tank volun 55 mL (1.9 USoz) w/BL1830B/BL1850B/ (LxWxH) BL1860B: 459 x 90 x 249 mm

150 mm (6")

(18 x 3-1/2 x 9-3/4") 1.7-2.0 kg (3.7-4.4 lbs.) Net weiaht







Saw chain, Guide bar, Guide bar case, Round file (country-specific), Chain oil (country-specific), Battery, Charger, Z: Battery and Charger are sold separately





- The switch on the battery box enables the user to lift up the flat frame to 1,020mm above ground level electrically (elevated to 1,020mm in approximately 30 seconds
- 4-wheel barrow (with front-wheel drive system) for stable load-carrying even with heavy loads
- Traveling speed change
- Tubed tire (used for both front and rear wheels)
- Driving wheels (Front wheels) touch the ground stably
- XPT (eXtreme Protection Technology) / IPX4-compatible
- Swivel lock fixes the direction of rear wheels

Electric dump

- Reduces workload when dumping soil and other materials on the ground that are too heavy to lift manually
- The bucket can be tilted electrically up to 75° with a reference to the ground, and then the bucket can be tilted manually up to 110°
- Dump bucket
 - Bucket capacity:
 - Heaped capacity 200 L
 - Full liquid capacity 100 L
 - Rust-free plastic bucket accepts wet loads
- Dump bucket can be replaced with Carrier (optional)







BAC01

Power Converter

- Power converter powered by Makita portable power pack
- Turns DC power into AC power, is optimal for a wide range of applications
- Battery charging or use of corded tools in outdoor job sites where AC outlet is not available
- Emergency power source of outdoor leisure activities
- 7-stage output indication by 7 LED lamps
- Can be connected firmly with accessories of MAKPAC system, allowing for easy transportation on MAKPAC trolley or cart
- Carrying handle

















D-44286

Diamond Wheel Segmented for Concrete

- 10pcs per set
- Masonry work for cutting concrete
- Diameter: 180 mm
- Suitable for 9" grinder









D-77263

Diamond wheel Continuous rim 76mm for Tile

- Constructor, interior decorator, DIY user
- Suitable for Cordless Cutter DMC300
- Excellent cutting speed and clean cut surface due to thin blade design





E-14635 / E-14691

SDS-PLUS NEMESIS II (Dia.14 / Dia.15)

- Nemesis II drill bits provide better breaking strength and drilling speed in reinforced concrete
- For drilling into masonry and concrete
- Centering point and symmetrical 4-cutter head guarantee a more precise drilling



E-14635- 14mm E-14691- 15mm

E-22218

Jig saw blade B shank wood finish

- Jigsaw blade for woodwork finishing that can cut curved lines of 2x4 materials
- With an effective length of 80mm, possible to cut 2 x 4 materials (thickness of 38mm)
- Contractors, Furniture Makers, DIY Users









Visit us at: www.makita.com.sg