

MAINTENANCE & OUTDOOR POWER EQUIPMENT CATALOGUE



2





A	
AS001GZ02	77
С	
CF001GZ	68
CF002GZ	68
CF003GZ NEW	68
CL001GD115(RD/T+B)	15
CL001GD126(RD/T+W)	15
CL001GZ04(Z/T+B)	15
CL001GZ12(Z/T+W)	15
CL002GZ03(ZB)	15
CL002GZ07(ZW)	15
CL003GD114(RDW)	15
CL003GD115(RDB)	15
CL003GZ09(ZB)	15
CL003GZ14(ZW)	15
CL100DW	16
CL106FDSAW	16
CL106FDZ	16
CW001GZ	69
CW002GZ	69
CW003GZ	69
CW004GZ NEW	69
D	
DAS180Z	77
DCF102ZX1	68
DCF203Z	68
DCF301Z	68
DCL184Z	14
DCL280BX12 / FZB	16
DCL283FRTB / FZB	16
DCL284FRTB / FZB	16
DCL286FRTB / FZB	15
DCU180Z	35
DCU601Z NEW	34
DCU602Z NEW	34
DCU603Z	35
DCU604Z	35
DCU605Z	35
DDG460ZX4	46
DG001GZ02	46

D	
DHW080ZK	46
DLM230RG / Z	43
DLM330RG	43
DLM382CF2	43
DLM382Z	43
DLM460Z	42
DLM462Z	42
DLM480Z	42
DLM481Z	42
DLM530Z	42
DLM532Z	42
DLM533Z	42
DLM538Z	42
DLM539Z	41
DML805	74
DML807	75
DML809	74
DML810	74
DML811	73
DML812	75
DML813	74
DML814	74
DML815	75
DML816	76
DML817	76
DMP180Z	77
DMR057	71
DMR108	71
DMR300	70
DRC200Z	14
DRC300Z	13
DUA301ZB	33
DUB184Z	29
DUB185Z	30
DUB186Z	29
DUB187Z	29
DUB362Z	29
DUB363ZV	29
DUC150Z NEW	32
DUC254Z	32

D	
DUC306ZB	32
DUC353ZB	31
DUC355Z	32
DUC357ZX4	32
DUH502Z	36
DUH506Z	36
DUH507F001 / Z	36
DUH601Z	36
DUH604SZ	36
DUH606Z	36
DUH751Z	36
DUH754SZ	35
DUM111SYX	37
DUM604SF / Z	37
DUN461WSF/WZ	37
DUN500WZ	37
DUP361ZN	44
DUR181Z	39
DUR189Z	39
DUR193SF / Z	39
DUR194SFX2	39
DUR368LZ	39
DUR369LZ	39
DUS054Z	45
DUS108Z	45
DUS158Z	45
DUX18Z	31
DUX60Z	30
DVC150LZ	11
DVC155LZX2	11
DVC350Z	16
DVC560PG2	12
DVC560Z	12
DVC660ZX7	13
DVC665Z	13
DVC750LZX1	14
DVC860LZ	11
DVC865LZX2	12
DVC867LZX4	12
DVF104Z	46







D	
DVF154Z	46
E	
ELM3320	43
ELM3720	43
ELM4121	43
ELM4620	43
H	
HW001GZ NEW	46
HW102	47
HW1300	47
HW132	47
HW151	47
L	
LM001CZ	41
LM001GZ	40
LM001JM101	40
LM002GZ	40
LM002JM101	40
LM003GZ NEW	41
LM004GZ NEW	41
LM004JZ	40
M	
ML001G	75
ML002G	75
ML003G	73
ML005GX	72
ML006G	76
ML007G	75
ML009G	72
ML010G	74
ML011G	76
ML106	75
ML107	76
MP001GZ	76
MP100DZ	77
MR002G	70
MR006G	70
MR010G	71
MW001GZ NEW	70
PDC01 (191A62-6 / 191A67-6)	27

P	
PDC1200A01 / A02	27
PDC1500A01 NEW	27
PM001GT202(PT2) / GZ01 NEW	45
U	
UA001GM102(RM) / GZ01	33
UA002GM102(RM) / GZ01	33
UB001CZ	28
UB001GM201(RMX) / GZ	28
UB002CZ01	28
UB003CZ NEW	28
UB100DZ	30
UB101DZ	29
UB1102	30
UB1103	30
UB1103/B	30
UC003GZ01	31
UC012GT101(RT) / GZ	31
UC014GT101(RT) / GZ	31
UC015GT101(RT) / GZ	31
UC022GZ NEW	31
UC100DZ	33
UC3541A	33
UC3551A	33
UC4041A	33
UC4051A	33
UC4551A	33
UH006GZ	35
UH014GM101(RM) / GZ	35
UH201DZ	37
UH353DSA / DZ	37
UM600DSYEX / DWA / Z	38
UN460WDWA / WDZ	37
UP100DZ NEW	44
UR003GZ	38
UR008GM101(RM) / GZ01	38
UR012GZ04	38
UR013GZ03	38
UR017GZ	38
UR100DWA / DZ	40
UR202CZ	38

U	
UR3000	40
US053DZ	45
UV001GZ NEW	43
UX01GZ	30
V	
VC003GLZ	11
VC004GLZ	11
VC006GMZ03	11
VC008GZ04	12
VC009GZ	12
VC011GZ NEW	12
VC2000L	15
VC2510L	15
VC3210L	14
VC3210L/B	14
VS001GZ NEW	13

Li-ion Battery & Charger Time Reference, Compatibility Chart

40Vmax



















				batteries	batteries	(198446-3)	(194621-9)
	8.0Ah BL4080F (191X65-8)	76 min.	170min.	-	-	-	-
	5.0Ah BL4050F (191L47-8)	50min.	85min.	-	-	-	-
40V max Lithium-ion	4.0Ah BL4040F (1910N6-8) BL4040 (191B26-6)	45 _{min} .	67min.	-	-	-	-
	2.5Ah BL4025 (191B36-3)	28 _{min} .	38min.	-	-	-	-
	2.0Ah BL4020 (191L29-0)	22min.	30 _{min} .	-	-	-	-
	6.0Ah BL1860B (197422-4)	-	-	40 min.	85min.	55min.	130 _{min.}
	5.0Ah BL1850B (197280-8)	-	-	35min.	70min.	45 _{min.}	110min.
18V Lithium-ion	4.0Ah BL1840B (197265-4)	-	-	29 _{min.}	58min.	36min.	90min.
	3.0Ah BL1830B (197599-5)	-	-	22 min.	42min.	22min.	60min.
	2.0Ah BL1820B (197254-9)	-	-	24 _{min.}	33 _{min.}	24 _{min.}	45 _{min} .
	1.5Ah BL1815N (196449-1)	-	-	15 _{min.}	22min.	15 _{min.}	30 _{min.}
			DC10WD -		DC4001		















12V_{max} Lithium-ion CXT,

5.0Ah BL1050B (1913G0-9)	75 _{min.}	160min.
4.0Ah BL1041B (197406-2)	60 min.	130 _{min.}
2.0Ah BL1021B (197396-9)	30 _{min.}	70min.
1.5Ah BL1016 (197393-5)	22min.	50min.



35.5Ah 360min. PDC1200 43.55Ah 450 min. PDC1500



Powerd by up to four 18V LXT **Batteries**











G -Series	
18V	14.4V
18V/	1





70

64V_{max} Lithium-ion

10.0Ah BL64100 (191Y69-6) 4.0Ah BL6440 120min.

300 min.

10.8V Lithium-ion 7.2V Lithium-ion

1.3Ah BL1013 (196066-7) BL0715

50 min. 35

min.

Lithium-ion 14.4V Lithium-ion

.5_{Ah} BL1815G | BL1415G (198186-3) | (198192-8) 2.0_{Ah} BL1820G

min. 90





MAKPAC Power Source Kit Fast Charger (DC40RC), 2X40Vmax - 2.0Ah Batteries QADPSKG1 (191V23-2) (BL4020), Makpac **QAEPSKG1** Fast Charger (DC40RC), 2X40Vmax - 2.5Ah Batteries (191V31-3) (BL4025), Makpac MKP1G001 Rapid Charger (DC40RA), 2X40Vmax - 2.5Ah Batteries (191J85-8)(BL4025), Makpac MKP1G002 Rapid Charger (DC40RA), 2X40Vmax - 4.0Ah Batteries (BL4040), Makpac (191K01-6) MKPPSKG2 Rapid Charger (DC40RA), 2X40Vmax - 5.0Ah Batteries (BL4050F), Makpac (191V42-8) Dual Port Multi Rapid Charger (DC40RB), **QAAPSKG3** 2X40Vmax - 4.0Ah Batteries (BL4040), Makpac (191U06-6) Dual Port Multi Rapid Charger (DC40RB), **QABPSKG3** 2X40Vmax - 5.0Ah Batteries (BL4050F), Makpac (191U20-2) Dual Port Multi Rapid Charger (DC40RB), **QAPSKG3** 2X40Vmax - 8.0Ah Batteries (BL4080F), Makpac (1910A2-5) **QACPSKG3** Dual Port Multi Rapid Charger (DC40RB), (191U34-1) 4X40Vmax - 4.0Ah Batteries (BL4040), Makpac **QADPSKG3** Dual Port Multi Rapid Charger (DC40RB), 4X40Vmax - 5.0Ah Batteries (BL4050F), Makpac (191U48-0)

MAKP	AC Power Source Kit	LXT (18V)
MKP1RF182 (197974-5)	Rapid Charger (DC18RC), 2X18V - 3.0Ah Batteries (BL1830B), Makpac	
MKP1RT182 (197803-2)	Rapid Charger (DC18RC), 2X18V - 5.0Ah Batteries (BL1850B), Makpac	
MKP1RG182 (198119-8)	Rapid Charger (DC18RC), 2X18V - 6.0Ah Batteries (BL1860B), Makpac	
MKP3PT182 (198182-1)	Dual Port Rapid Charger (DC18RD), 2X18V - 5.0Ah Batteries (BL1850B), Makpac	
MKP3PG182 (198081-7)	Dual Port Rapid Charger (DC18RD), 2X18V - 6.0Ah Batteries (BL1860B), Makpac	
MKP3PT184 (197627-6)	Dual Port Rapid Charger (DC18RD), 4X18V - 5.0Ah Batteries (BL1850B), Makpac	
MKP3PG184 (198095-6)	Dual Port Rapid Charger (DC18RD), 4X18V - 6.0Ah Batteries (BL1860B), Makpac	

MKP1SY122 Fast Charger (DC10SB), 2X12Vmax - 1.5Ah Batteries (BL1016), Makpac MKP1SA122 (191K13-9) Fast Charger (DC10SB), 2X12Vmax - 2.0Ah Batteries (BL1021B), Makpac MKP1SM122 Fast Charger (DC10SB), 2X12Vmax - 4.0Ah Batteries (BL1041B), Makpac



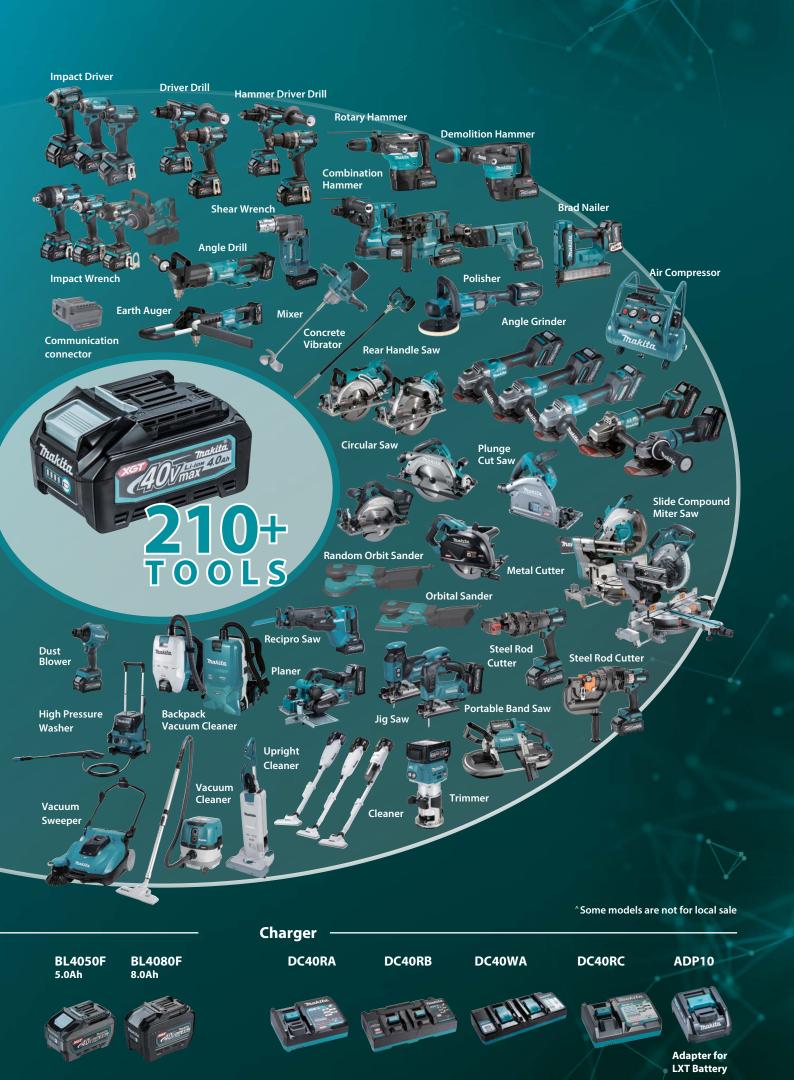

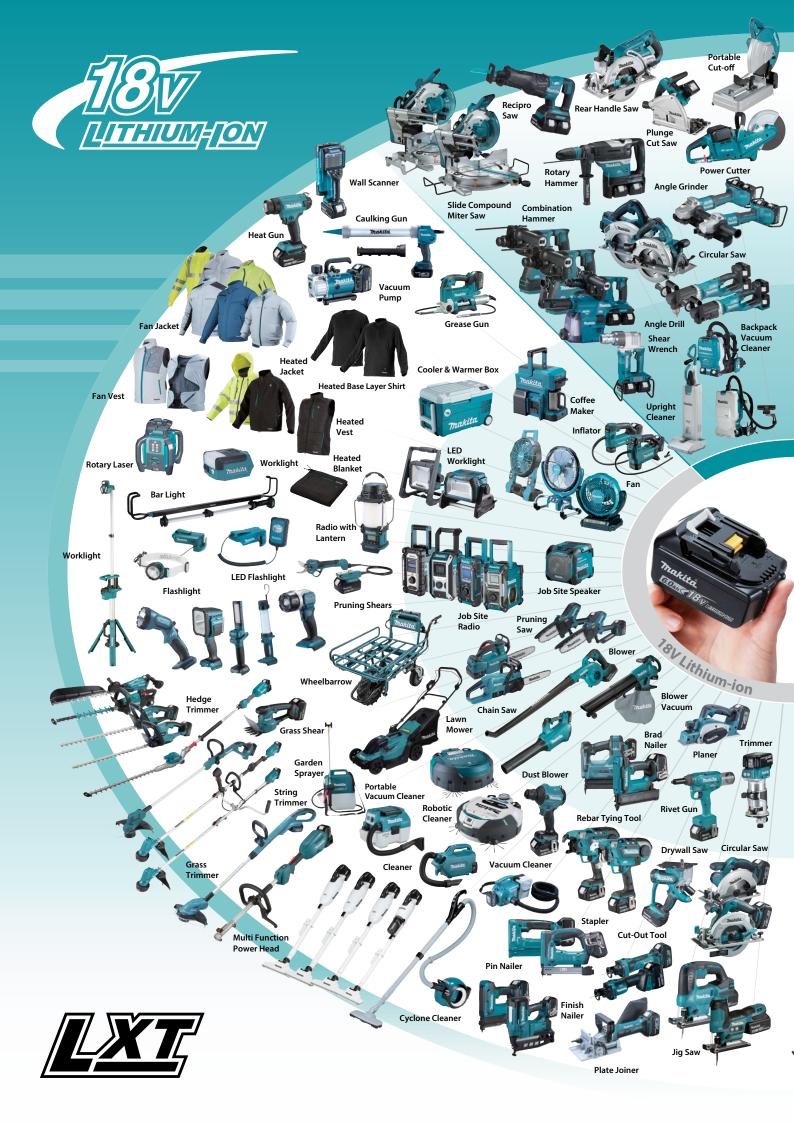





Trakita

CLEANING EQUIPMENT

Trakita

VC006GMZ03 (Wet & Dry) Cordless Vacuum Cleaner

80Vmax XGT BL AWS Cordless 40L Dust Class M GYUPPA Vacuum Cleaner





Capacity	Dust/Water: 40/30L
Max Air Flow	w/Hose 28-3.5: 2.0 m³/min w/Hose 38-2.5: 3.7 m³/min
Max Sealed Suction	18 kPa
Suction Power	350 W
Dimensions	586 x 385 x 598 mm
(LxWxH)	(23 x 15-1/8 x 23-1/2")
Net weight	18.4 - 20.8 kg (40.6 - 45.9 lbs.)

VC003GLZ (Wet & Dry) Cordless Vacuum Cleaner

40Vmax BL Cordless 15L Vacuum Cleaner



Capacity	Dust/Water: 15/12 L
Continuous Use (min.)	BL4050F x2: 220
Max Air Flow	3.2 m³/min
Max Sealed Suction	23 kPa
Suction Power	310W
Dimensions	366 x 334 x 475 mm
$(L \times W \times H)$	(14-3/8 x 13-1/8 x 18-3/4")
Net weight	8.3 - 10.2 kg
	(18.3 - 22.5 lbs.)

CLEANING EQUIPMENT













Floor nozzle, Straight pipe, Bent pipe, Hose, Dust bag, Corner nozzle, Front cuffs (22, 24), Wireless unit, Cap, Joint, Battery, Charger, Z: Battery and Charger are sold separately

40Vmax WAR CO BL XPT





Floor Nozzle, Long Sash Nozzle, Telescopic pipe assembly, Bent Pipe, Pipe, Hose, Plastic Dust Bag x10, Filter, Tool Box, Battery, Charger, Z: Battery and Charger are sold separately

Dust class M approved Tank capacity Dry / Wet 40 / 30 L

Automatic self-cleaning filter system

Automatically removes dust adhering to filter even in continuous use, reducing clogging of the filter to suppress decrease in suction power.



Max air flow

Hose size: ø38mm x 2.5m

Hose size: ø28mm x 3.5m

3.7 m³/min.

2.0 m³/min.



Continuous use

Battery: BL4050F x2 [at dial Min] [at dial Max]

80 min. 25 min.



VC004GLZ (Dry) Cordless Vacuum Cleaner

40Vmax BL AWS Cordless 15L HEPA GYUPPA Vacuum Cleaner

Li-ion Ab 8.0 5.0 4.0 2.5 2.0



Capacity Dust: 15 L Continuous Use (min.) BL4050F x2: 220 Max Air Flow Max Sealed Suction 1.8 m³/min 23 kPa Suction Power 205 W 366 x 334 x 475 mm Dimensions (LxWxH) (14-3/8 x 13-1/8 x 18-3/4") 8.5 - 10.4 kg Net weight (18.7 - 22.9 lbs.)

DVC150LZ (Wet & Dry) Corded and Cordless Vacuum Cleaner

Powered by AC and Two 18V Li-lon Batteries in Series

Li-ion Ah 6.0 5.0 3.0 1.5



353 //// Capacity Max Air Flow Dust/Water: 15/12L AC/DC: 3.6/2.1 m³/min Max Sealed Suction AC/DC:24/9kPa Suction Power AC/DC: 320/25-70 W Vibration Level Sound Pressure Level 2.5 m/s² or less 75 dB(A) 366x334x421 mm Dimensions (L x W x H) (14-3/8"x13-1/8"x16-1/2") Net weight 8.9 - 9.6 kg (19.7 - 21.1 lbs.)





DVC155LZX2 (Wet & Dry)

Li-jon Ab 6.0 5.0 3.0 1.5







Dust/Water: 15/12 L

105 W 366x334x421 mm

(14-3/8"x13-1/8"x16-1/2")

7.2 - 7.9 kg (16.1 - 17.4 lbs.)

2.1 m³/min 11 kPa

Powder Filter H Set, Damper Set, Pre Filter Set, Hose (38mm-2.5m), Cuff Lock, Stopper, Sleeve, Front cuffs (38,22, 24) Battery, Charger, Wireless Unit, Z: Battery and Charger are sold separately

18V X2 (36V) LXT BL Cordless 15 L Dust Class L Vacuum Cleaner (Wet & Dry)

Capacity Max Air Flow

Net weiaht

Max Sealed Suction

Suction Power
Dimensions (L x W x H)

DVC860LZ (Wet & Dry) Corded and Cordless Vacuum Cleaner

8L Large dust bag capacity enables continuous cleaning work

Li-ion Ah 6.0 5.0 3.0 1.5



Dust/Water: 8/6L Capacity With BL1850B x 2: 65 AC/DC: 3.6/2.1 m³ Continuous Use (min.) Max Air Flow /min AC / DC: 24 / 9 kPa Max Sealed Suction Suction Power AC/DC: 320/25 - 70 W Dimensions 366x334x368mm (LxWxH) (14-3/8"x13-1/8"x14-1/2") Net weight 8.6 kg (19.0 lbs)











 $Floor \, Nozzle, Long \, Sash \, Nozzle, Telescopic \, pipe \, assembly, \, Bent \, Pipe, \, Pipe, \, Plose, \, Plastic \, Dust \, Bag \, x \, 10, \, Filter, \, Tool \, Box, \, Battery, \, Charger, \, Z: \, Battery \, and \, Charger \, are \, sold \, separately$





DVC860L: Floor Nozzle, Corner Nozzle, Straight Pipe, Bent Pipe, Hose (38mm-25m), Plastic Dust Bag, Plastic Dust Bag x10, Cloth Filter, Tool Box, Connection cord (country-specific), 2: Battery and Charger are sold separately

Floor Nozzle, Corner Nozzle, Straight Pipe, Bent Pipe, Hose (38mm-2.5m), Plastic Dust Bag, Plastic Dust Bag x10, Cloth Filter, Tool Box, Connection cord (country-specific), Battery, Charger, Z: Battery and Charger are sold separately

CLEANING EQUIPMENT

Trakita

DVC865LZX2 (Wet & Dry)

18V X2 (36V) LXT BL Cordless 8 L Dust Class L Vacuum Cleaner (Wet & Dry)



Capacity	Dust/Water:8/6L
Max Air Flow	2.1 m³/min
Max Sealed Suction	11 kPa
Suction Power	105 W
Dimensions (L x W x H)	366x334x368 mm
	(14-3/8"x13-1/8"x14-1/2")
Net weight	7.0 - 7.7 kg (15.7 - 17.0 lbs.)

DVC867LZX4 (Dry) Cordless Vacuum Cleaner

18V X2 (36V) LXT BL AWS Cordless 8 L Dust Class L HEPA Vacuum Cleaner (Dry only)

Li-ion Ab 6.0 5.0 3.0 1.5



Capacity	Dust/Water:8/-L
Max Air Flow	2.4 m³/min
Max Sealed Suction	11 kPa
Suction Power	110W
Dimensions (L x W x H)	366x334x368 mm (14-3/8"x13-1/8"x14-1/2")
Net weight	7.7 - 8.4 kg (17.2 - 18.5 lbs.)









Floor Nozzle, Corner Nozzle, Straight Pipe, Bent Pipe, Hose (38mm-2.5m), Plastic Dust Bag, Plastic Dust Bag x10, Cloth Filter, Tool Box, Battery, Charger, Wireless Unit, Z: Battery and Charger are sold separately







Floor Nozzle, Long Sash Nozzle, Telescopic pipe assembly, Bent Pipe, Pipe, Hose, Plastic Dust Bag x10, Filter, Tool Box, Battery, Charger, Z: Battery and Charger are sold separately

DVC560PG2 / Z Cordless Upright Cleaner

18V X2 (36V) LXT BL Brushless Cordless 5 L HEPA Upright Cleaner



Capacity Dust: 5 L Continuous Use w/BL1860B x2 Max/Normal/Low (min.) Noise: 30/60/120 1.9 m³/min Max Air Flow Max Sealed Suction 12 kPa Max/Normal/Low Noise: Suction Power 85 / 50 / 25 W 318 mm Cleaning Width **Brushroll Rotation** Max / Normal / Low Noise: 3,500/2,500/1,000 RPM Speed Dimensions 326 x 318 x 1.146 mm (LxWxH) (12-7/8 x 12-1/2 x 45") Net weight 8.3 - 9.0 kg (18.3 - 19.8 lbs.)



Long Sash Nozzle, Round Brush, Filter Bag, Filter H, Filter Bag Set, Z: Battery and Charger are sold separately

VC011GZ Cordless Backpack Vacuum Cleaner

New

40Vmax XGT BL Brushless Cordless HEPA Backpack Vacuum Cleaner



Capacity Paper Dust Bag: 6.0 L Cloth Dust Bag: 5.5 L 2.4 m³/min Max Air Flow Max Sealed Suction 20 kPa w/BL4050F x2: Continuous use (approx.) on a full Mode 1/2/3/4: 260 / 130 /75 /40 min battery charge Suction Power Mode 1/2/3/4: 25W/55W/100W/195W Dimensions w/BL4040 x2: 301 x 185 x 526 mm (LxWxH) (11-7/8 x 7-1/4 x 20-3/4 ") 6.4 - 9.5 kg (14.1-20.9 lbs.) Net weight







For Cleaning

VC011G

Powered by

40Vmax XGT

Li-lon battery (two in parallel or one)

Hose, Hose band, Dust bag, Switching nozzle, Bent pipe with pipe locking mechanism, Aluminum telescopic pipe with pipe locking mechanism (country-specific), Long sash nozzle, Battery, Charger, Z: Battery and Charger are sold separately

VC008GZ04 Cordless Backpack Vacuum Cleaner

40Vmax XGT BL Brushless Cordless HEPA Backpack Vacuum Cleaner



Paper Dust Bag: 2.0 L Capacity Cloth Dust Bag: 1.5 L Max Air Flow 2.4 m³/min Max Sealed Suction 18 kPa w/ Hose 32-1.0 (Max): 180 W Suction Power 233 x 151 x 376 mm Dimensions (9-1/8 x 5-15/16 x 14-3/4") (LxWxH) Net weight 4.3 - 4.7 kg (9.5 - 10.4 lbs.)









Floor Nozzle, Hose, Hose Band, Nozzle, Telescopic pipe assembly, Bent Pipe, Switching nozzle, Free Nozzle, Dust Bag, Front Cuff (country-specific), Battery, Charger, Z: Battery and Charger are sold separately

VC009GZ Cordless Backpack Vacuum Cleaner



40Vmax XGT BL AWS Cordless HEPA Backpack Vacuum Cleaner



Capacity	Paper Dust Bag: 2.0 L Cloth Dust Bag: 1.5 L
Max Air Flow	1.9 m³/min
Max Sealed Suction	18 kPa
Suction Power	w/Hose 28-1.5, Max / High / Normal: 165 / 85 / 45
Dimensions	233 x 151 x 376 mm
(LxWxH)	(9-1/8 x 5-15/16 x 14-3/4")
Net weight	4.3 - 4.7 kg (9.5 - 10.4 lbs.)





Automatic filter cleaning mechanism

The board with springs located beneath the dust bag rocks due to walking vibration to remove dust from the bag, reducing filter clogging to maintain suction power.

Telescopic pipe with lock

· A locking mechanism has been added to the connection of bending pipe and this pipe to prevent from falling off.

• Available in lightweight plastic and rigid aluminum

> Locking mechanism **Telescoping button**



Max Suction power

Low noise

Max Sealed Suction

195 w mode: 4 / With ø32mm x 1.0m Hose

55 dB(A)

20 kPa



DVC660ZX7 Cordless Backpack Vacuum Cleaner

18V X2 (36V) LXT BL Brushless HEPA Cordless Backpack Vacuum Cleaner



Capacity	Paper Dust Bag: 6.0 L Cloth Dust Bag: 5.5 L
Max Air Flow	w/Hose complete 32-1.0: 2.2 m³/min w/Hose Complete 28-1.0: 2.0 m³/min
Suction Power	Max/High/Normal w/ Hose 32-1.0: 95/50/25 W Max/High/Normal w/ Hose 28-1.0:90/45/25 W
Vibration Level	Operation w/o Load: 2.5 m/s² or less
Dimensions (L x W x H)	297x174x523 mm (11-3/4"x6-7/8"x20-5/8")
Net weight	6.1 - 6.7 kg (13.4 - 14.8 lbs.)

18V x2 BE IXT BL

Floor Nozzle, Hose, Hose Band, Nozzle assembly, Telescopic pipe assembly, Bent Pipe, Switching nozzle, Free Nozzle, Dust Bag, Front Cuffs (22, 24), Battery, Charger, Z: Battery and Charger are sold separately

DVC665Z Cordless Backpack Vacuum Cleaner

18V X2 (36V) LXT BL AWS HEPA Cordless Backpack Vacuum Cleaner



Capacity	Paper Dust Bag: 6.0 L Cloth Dust Bag: 5.5 L
Max Air Flow	w/ Hose Complete 28-1.5: 1.8 m³/min
Suction Power	High / Normal w/ Hose 28-1.5: 85 / 45 W
Vibration Level	Operation w/o Load: 2.5 m/s² or less
Dimensions (L x W x H)	297x174x523 mm (11-3/4"x6-7/8"x20-5/8")
Net weight	6.1 - 6.7 kg (13.5 - 14.9 lbs.)

18V x2



Floor Nozzle, Hose, Hose Band, Nozzle assembly, Telescopic pipe assembly, Bent Pipe, Switching nozzle, Free Nozzle, Dust Bag, Front Cuffs (22, 24), Battery, Charger, Z: Battery and Charger are sold separately

VS001GZ Cordless Vacuum Sweeper

New

40Vmax XGT BL Cordless 24 L Dust Class HEPA Vacuum Sweeper



Dust container capacity 24 L (6.3 gal) Continuous use w/BL4080F x2: 150 min (approx.) on a full battery charge w/BL4080Fx2, w/DC40RA: 120 min Charging time approx. Sweeping capacity Cleaning width 2.600 m²/h Main brush: 480 mm (18-7/8"), Side brush: 650 mm (25-1/2 ") Dimensions (L x W x H) w/ Handle in upriaht

position: 830 x 677 x 1,146 mm (32-3/4 x 26-3/4 x 45") 31-34 kg (68.3-74.9 lbs.)

Net weight O 2 A HEPA

Battery, Charger, Z: Battery and Charger are sold separately

DRC300Z Robotic Cleaner

18 V LXT BL Brushless Robotic Cleaner w/ Mapping Function



Continuous Use (min.) w/BL1860B x2: 240 Max cleaning area w/ BL1860B x2: 600 m² Max running speed 0.3 m/sec Dust Box Capacity 3.01 Dimensions (LxWxH) 500 x 500 x 204 mm (19-3/4 x 19-3/4 x 8") 9.6 - 10.6 kg Net weight (21.2 - 23.4 lbs.)







Wireless remote controller (including two AAA alkaline batteries), Side Brush,

Maximum cleaning area 600m² BL HEPA filter with mapping feature









The number of rooms that can



Compatible with **Smartphone app** [Makita RoboPro DRC300]

Dust box capacity

Continuous run time (approx.) on a full battery charge



Equipped with LiDAR sensor (2D) and Camera sensor, the cleaner can map and memorize the rooms to clean.

CLEANING EQUIPMENT

Trakita

DRC200Z Robotic Cleaner

Provides easy maneuverability anywhere you need cleaning





lxt sl

C .: (: .)	DI 1050D 3 300
Continuous use (minutes)	
	BL1830Bx2: 120
Max. cleaning area	BL1850Bx2: 500m ²
	BL 1830Bx2: 300m ²
Max. running speed	0.3 m/sec
Dust box capacity	2.5L
Dimensions	460x460x180mm
(LxWxH)	(18-1/8"x 18-1/8"x 7-1/8
Net weight	7.8kg (16.1lbs)

DCL184Z Cordless Cleaner

18V LXT Li-lon Cordless 3-Speed Cleaner



Capacity	Cloth / Paper Dust Bag: 500 / 330 mL
Continuous Use(min.)	Max/High/Normal: 33/50/133
Max Air Flow	Cleaning: 1.4 m3/min Blowing: 0.8 m3/min
Max Air Velocity	Blowing: 7.2 m/s
Max Sealed Suction (water column)	5.4 kPa (550 mmH₂O)
Noise Level	Max/High/Normal: 68/65/58 dB(A)
Dimensions (L x W x H)	w/BL1830B/BL1850B/ BL1860B: 365x138x202 mm (14-3/8"x5-7/16"x8")
Net weight	18-22ka (40-49lbs)

110V

VC3210L/B





Seat Nozzle, Mat Nozzle, Rubber Nozzle, Soft Brush, Blower Attachment, Dust Bag, Paper Dust Bag, Shoulder Belt, Battery, Charger, Z: Battery and Charger are sold separately

DVC750LZX1 Cordless Portable Vacuum Cleaner

Wireless remote controller (including two AAA alkaline batteries), Side brush, Boundary tape (15m roll), Z: Battery and Charger are sold separately

Compact, portable and easy-to-use

Li-ion Ah 6.0 5.0 3.0 1.5



Capacity	Dust/Water: 7.5/4.5 L
Continuous Use (min.)	w/BL1850B (High): 30
	w/BL1850B (Normal): 60
Max Air Flow	1.3 m³/min
Max Sealed Suction	6.7 / 4.2 kPa
Suction Power	High / Low: 50 / 25 W
Dimensions	418x251x278 mm
(LxWxH)	(16-1/2"x9-7/8"x11")
Net weight	4.3 - 4.6 kg (9.4 - 10.1 lbs.

VC3210L Vacuum Cleaner (Wet & Dry)

Complying with dust class L



173 WW Continuous Rating Input 1,050W Max Peak Air Ow 2.0m3/min Max Sealed Suction 22.0 kPa (2,240 mmH₂O) Dust: 32 L (Water Column) Tank Capacity Water 271 552x398x685mm Dimensions $(L \times W \times H)$ (21-3/4"x15-5/8"x27") Net Weight 14.5kg (32.0lbs) Power Supply Cord 5.0m (16.4ft)



Hose Complete 28-3.5 (with Front Cuffs 38), Holder 10-33, Front Cuffs 22, Front Cuffs 24, Poly Bag Set



Dust classes in accordance with the EU standard

Since 1997, hazardous dusts have been categolized into 3 (three) classes, namely, Class L, Class M and Class H, which is regulated by IEC60335-2-69 (world wide) and by EN 60335-2-69. The vacuum cleaners suitable for each of dust class have been also defined by these regulations as follows:

Dust class	Model No.	Definition Of Dust	Major requirement	Dust permeability *4
н	VC3211H	*OEL values >0.1mg/m³ all kinds of dusts caused cancer, disease.	Air flow sensor Filter protection structure *1 Structure that requires a tool for filter removal/installation *2 Structure that protects users from exposure to dust when emptying dust bag *3	less than 0.005%
М	VC3211M, VC2211M, VC4210M, VC3012M,	*OEL values >0.1mg/m³ as well as saw dust	• Air flow sensor • Filter protection structure *1	less than 0.1%
L	VC1310L, VC2510L, VC3210L, DVC860L, DVC861L, DVC865L, DVC866L, DVC867L, DVC750L, DVC150L, DVC151L, DVC155L, DVC156L, DVC157L, VC4210L, VC2012L, VC2512L, VC3011L,VC3012L	*OEL values >1mg/m³		less than 1%

Apart from the above standard regulated by IEC/EN 60335-2-69, "HEPA" is widely recognized as one of famous guidelines of the filtration efficiency.

According to this standard, the filter of "HEPA" should remove more than 99.75% of airborne particles of 0.3µm in diameter.

Thus, it stipulates only a filtration efficiency of the filter itself, while IEC/EN60335-2-69 defines the vacuum machine suitable for each dust class (construction, mechanical strength of machine) as well as its dust permeability. In this sense, Dust Class H vacuum cleaner does not always have to be equipped with HEPA filter as long as it meets the requirements of IEC/EN60335-2-69. Another difference between HEPA testing methods and the IEC/EN60335-2-69 is the dust loading.

Filter elements for dust classes M and H are to be tested with the limestone dust particles in large quantities for checking the physical strength of filter, while HEPA tests are done with very small liquid droplets.

- **OEL**: Occupation Exposure Limit In dirty indoor environment with high activity, such as schools, the average values of OEL are measured 0.5mg/m³. In case of "non-activity place", 0.15mg/m³ in office and 0.2mg/m³ in school are measured in
- *1 Filters should be protected from sharp objects such as nails when they are accidentally sucked up. The solution for VC3211M/ VC3211H is a protector for the filter units.
- *2 Filters loaded with dust should not be easily removed. The solution for VC3211H is a screw that locks the filter unit lock lever to the lock plate.
- *3 Dust should be prevented from flying around when emptying dust bags or replacing filters. The solution for VC3211H is the filter bag already available as an optional accessory of VC3211M.
- *4 Permeability of limestone (marble) particles having a diameter of 5 microns or less, in accordance with the EU standard



VC2510L Vacuum Cleaner (Wet & Dry)

Complying with dust class L





VC2000L Vacuum Cleaner (Wet & Dry)

Wet & Dry L-class Vacuum Cleaner



Continuous ratina Input 1.000W Max. peak air flow 216 m3/h Max. sealed suction 21kPa Dust: 20L Tank capacity Water: 13L Dimensions 375x 385 x 505mm (14-7/6" x 15-1/5" x (LxWxH)19-8/8") 7.5kg (16.5lbs) Net Weiaht Power supply cord 5.0m (16.4ft)

CLEANING EQUIPMENT



Hose Complete 28-3.5 (with Front Cuffs 38), Holder 10-33, Front Cuffs 22, Front Cuffs 24, Plastic Dust Bag Set Filter Bag - Fleece, Disposal Bag - Plastic, Suction Hose, Suction Tube, Hand tube, Floor Nozzle,

Automatic self-cleaning filter

obtained by Triple filter structure composed of: Powder filter + Damper + Prefilter

- When the power is switched off, Damper expands back to its original size and shakes off dust from Prefilter automatically with its expanding power
- 2 When the power is switched on, Prefilter collapses into itself to compress Damper, and fits closely over Damper and Powder filter



Allows for: 🗸 Constantly high suction power 🗸 Easy filter cleaning simply by tapping dust off of Prefilter 🗸 Quiet cleaning because Damper and Prefilter make no noise

CL001GD115(RD/T+B) / GD126(RD/T+W) / GZ04(Z/T+B) / GZ12(Z/T+W) Cordless Cleaner

40Vmax XGT BL Brushless Cordless 4-Speed Cleaner with LED Light



40Vmax

4 ₺ *ഒരു ෪*ഺ Floor Nozzle, Sash Nozzle, Sash Nozzle Holder, Pipe, Filter H, Easy Shake Off Filter, Battery, Charger, Z: Battery and Charger are sold separately

Capacity Continuous Use (min.) w/BL4040, 1/2/3/4 128/64/40/25 Max Air Flow 1.2 m³/min Max Sealed Suction (water column) 21 kPa (2,100 mmH₂O) Suction Power w/Easy Shake Off Filter, 1/2/3/4: 20/45/70/125W Dimensions (LxWxH) w/BL4020/BL4025: 1,066 x 113 x 152 mm w/BL4040: 1 081 x 113 x 152 mm 1.7 - 2.3 kg (3.5 - 5.1 lbs.) Net weight

CL002GZ03(ZB) / GZ07(ZW) Cordless Cleaner

40Vmax XGT BL Brushless Cordless 4-Speed Cleaner with LED Light



Capacity Dust Bag: 500 mL Paper Pack: 330 mL Continuous Use (min.) w/BL4025, 1/2/3/4: 80/40/25/16 Max Air Flow Max Sealed Suction 1.2 m³/min 21 kPa (water column) (2,100 mmH₂O) 125 W Suction Power w/Easy Shake Off Filter, 1/ 2/3/4: 20/45/70/125 W Dimensions (LxWxH) 505 x 114 x 152 mm (19-7/8 x 4-1/2 x 6") Net weight 1.8 - 3.0 kg (4.0 - 6.6 lbs.)

40Vmax

~4 ₺D Ø@ *BL*

Floor Nozzle, Sash Nozzle, Sash Nozzle Holder, Pipe, Easy Shake Off Dust Bag, Paper Dust Bag, Hand Strap, Battery, Charger, Z: Battery and Charger are sold separately

CL003GD115(RDB) / GD114(RDW) / GZ09(ZB) / GZ14(ZW) Cordless Cleaner

40Vmax XGT BL Brushless Cordless Cleaner



Capacity 250 mL w/BL4025, Mode 1/2/3/ 4:80/40/25/16 min Max air flow 1.0 m³/min 20 kPa (2,000 mmH₂O) Max sealed suction Suction power Mode 1/2/3/4: 15/35/60/100W Noise level Mode 1/2/3/4: 54/59/62/65 dB(A) w/Pipe & Nozzle, w/ Dimensions (LxWxH)BL4040: 1,121 x 113 x 177 mm (44-1/4 x 4-7/16 x 7") 1.9 - 2.5 kg (4.2 - 5.5 lbs.)

w/Easy shake off filter EX,

Floor Nozzle, Sash Nozzle, Sash Nozzle Holder, Pipe, Battery, Charger, Z: Battery and Charger are sold separately

DCL286FRTB / FZB Cordless Cleaner

18V LXT BL Cordless 4-Speed Cleaner with LED Light



Dust collectina type Cvclone 250 mL 1.0 m³/min Capacity Max Air Flow Max Sealed Suction 18 kPa w/ High performance Suction power filter, Mode 1/2/3/4: 15W/ 35W/ 60W/ 100W Dimensions 543 x 113 x 177 mm (21-3/8 x 4-7/16 x 7") (LxWxH)1.6 - 1.9 kg (3.5 - 4.2 lbs.)

4ID <u>ext **bl**</u>

Floor nozzle, Sash nozzle, Sash nozzle holder, Pipe, Battery, Charger, High performance filter (country-specific),

CLEANING EQUIPMENT

Trakita

DCL283FRTB / FZB Cordless Cleaner



730 mL Capacity Max Air Flow Max Sealed Suction 1.1 m³/min 17.5 kPa 90 W Suction power 503 x 113 x 154 mm Dimensions (19-3/4 x 4-7/16 x 6-1/8") 1.3 - 1.6 kg (2.9 - 3.5 lbs.) (LxWxH)Net weight

DCL284FRTB / FZB Cordless Cleaner

18V LXT BL Cordless 4-Speed Cleaner with LED Light



730 mL Capacity 1.2 m³/min 18 kPa Max Sealed Suction w/ High performance Suction power filter, Mode 1/2/3/4: 20W/45W/70W/125W 503 x 113 x 153 mm Dimensions (LxWxH) (19-3/4 x 4-7/16 x 6-1/16") 1.3 - 1.6 kg (2.9 - 3.5 lbs.) Net weight



4 ID LXT BL


Floor nozzle, Sash nozzle, Sash nozzle holder, Pipe, High performance filter, Battery, Charger, Z: Battery and Charger are sold separately





 $Floor \ nozzle, Sash \ nozzle, Sash \ nozzle \ holder, Pipe, High \ performance \ dust \ bag, Battery, Charger, Charge$

High suction power and Low noise level



• Equipped with high-speed BL motor to ensure high suction power.



Low noise

DCL283F

63 dB(A) DCL284F

65 [Mode 4] dB(A) DCL286F

66 [Mode 4] 6 dB(A)

Redesigned Floor/ Carpet T-nozzle

■ Redesigned structure reduces the resistance caused by suction, providing smooth running.

Redesigned inside air flow path reduces the noise made inside the nozzle.



photo: DCL283F

18V LXT BL Brushless Cordless Cleaner with LED Light



Continuous Use (min.) Max Air Flow Max Sealed Suction (water column) Dimensions (LxWxH) Net weight

photo: DCL284F

with BL1830B (High): 20 1.4 m³/min 6.4 kPa (640 mmH₂O) 1,016x113x155 mm (40"x4-7/16"x6-1/8") 1.2 - 1.6 kg (2.7 - 3.5 lbs.)

photo: DCL286F

CL106FDSAW / FDZ Cordless Cleaner

12Vmax CXT Li-Ion Cordless Cleaner



Capacity Continuous Use (min.) Max Air Flow Max Sealed Suction (water column) Dimensions (LxWxH) Net weight

600 mL with BL1041B: 42 1.3 m³/min 3.1 kPa (316 mmH₂O) 958x100x150 mm (37-3/4"x3-15/16"x5-7/8") 1 - 1.1 kg (2.1 - 2.5 lbs.)



Floor Nozzle, Sash Nozzle, Sash Nozzle Holder, Pipe, Filter H, Easy Shake Off Filter, Hand Strap, Battery, Charger, Z: Battery and Charger are sold separately

12Vmax

Floor Nozzle, Sash Nozzle, Sash Nozzle Holder, Pipe, Battery, Charger, Filter, Prefilter, DZ: Battery and Charger are sold separately

CL100DW Cordless Cleaner

18V

Lightweight but with strong suction power (14W)



Capacity Continuous Use (min.) Max Air Flow Max Sealed Suction (water column) Dimensions (LxWxH)

600 mL 1.2m³/ min 2.3kPa (235 mmH₂O) 966 x 103 x 150mm (38-1/32"x4-1/16"x5-7/8") 0.88kg (1.94lbs)

DVC350Z Cordless Vacuum Cleaner

Cordless design for high portability Li-ion Ah 6.0 5.0 3.0 1.5



Max Air Flow Max Sealed Suction (water column) Recoverable capa Dimensions (LxWxH) Net weiaht

1.4 m³/min (612 mmH₂O) Dust: 3.0 L (0.8 gal) 273x195x226 mm (10-3/4"x7-5/8"x8-7/8") 2.2 - 2.4 kg (4.8 - 5.3 lbs)





 $Battery\ Charger,\ Battery\ Cartridge,\ Nozzle\ Assembly,\ Sash\ Nozzle,\ Pipe,\ Filter\ (factory-mounted),\ Pre-filter\ (factory-mounted),\ DZ:\ Battery\ and\ Charger\ are\ sold\ separately$





Nozzle Assembly, Dust Bag Assembly, Hose Complete, Shoulder Belt, Z: Battery and Charger are sold separately



Makita





Building

- **Built-in Job Light**
- **2** Electronic 2-Speed
- **3** Electronic 3-Speed
- **4** Electronic 4-Speed













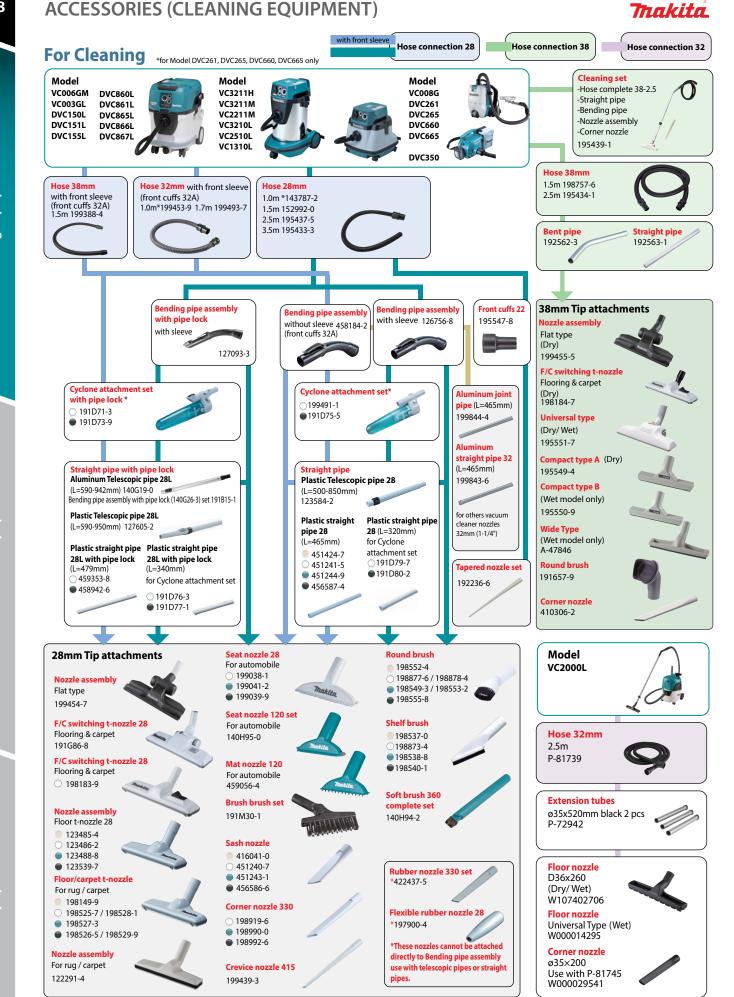


Trakita.

ACCESSORIES (CLEANING EQUIPMENT)

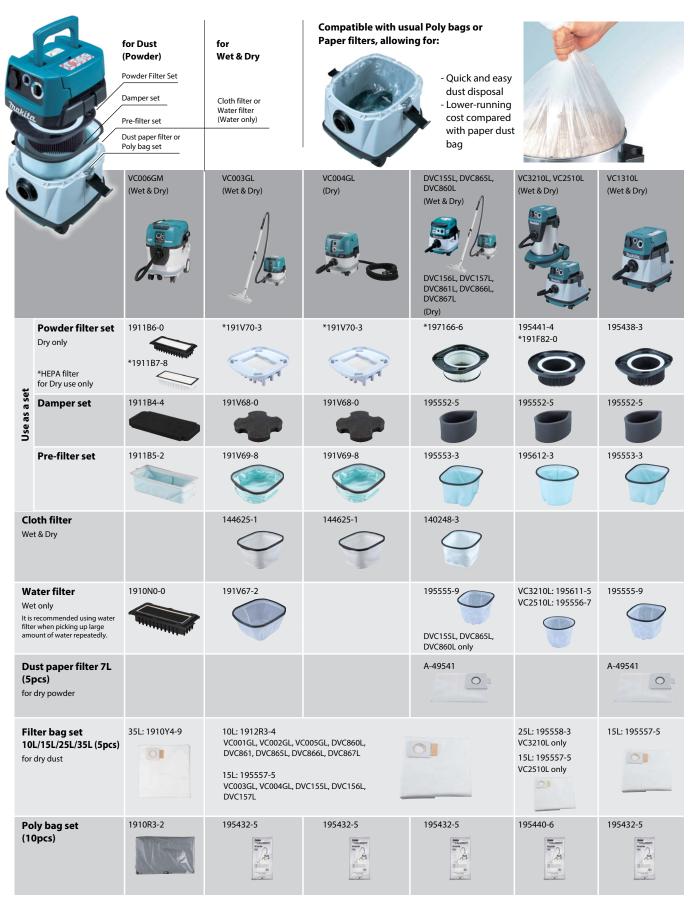

To use powder filter, remove the float cage and float by removing the bolts.



Capacity up tank setDVC860L, DVC861L, DVC865L, DVC866L, DVC867I

* "HEPA filter" Mark on tank





198882-3

198526-5


Nozzle assembly

For rug / carpet

122291-4

ACCESSORIES (CLEANING EQUIPMENT)



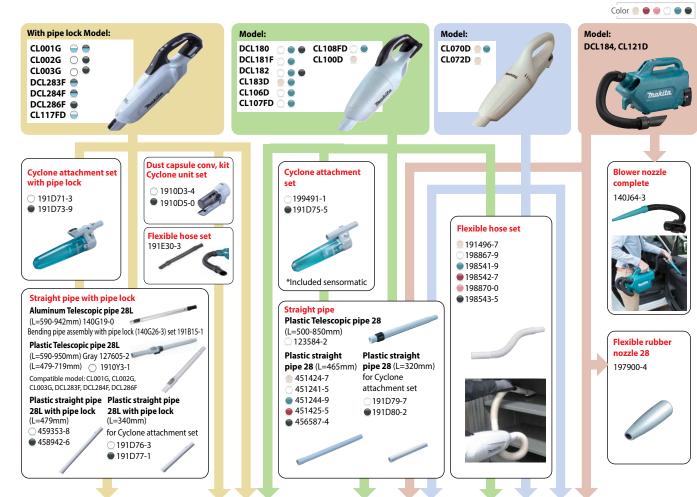





Seat nozzle 28

For automobile

makita

O 199038-1

199041-2

199039-9

Seat nozzle 120 se

Crevice nozzle 415


199439-3

For automobile

140H95-0







Rubber nozzle 330 set







Trakita.








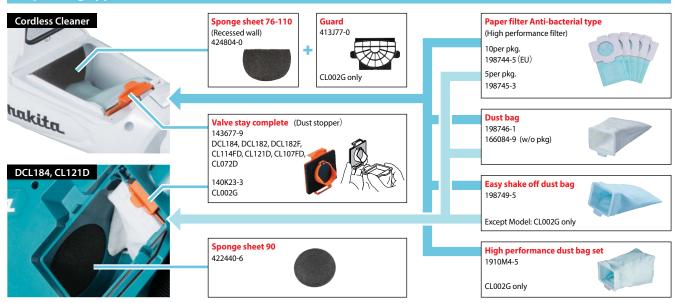

New cyclone unit Model: CL001G, CL003G, DCL283F, DCL284F, DCL286F, DCL180, DCL181F

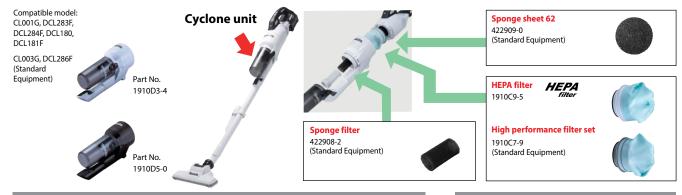





Cleaner body, battery,







Model: DCL184, CL121D (LxWxH: 490x210x230mm) Part No. 199900-0

Blue dust capsule


ACCESSORIES (CLEANING EQUIPMENT)



Cordless Upright Cleaner Model: DVC560




Cordless Portable Vacuum Cleaner Model: DVC750L

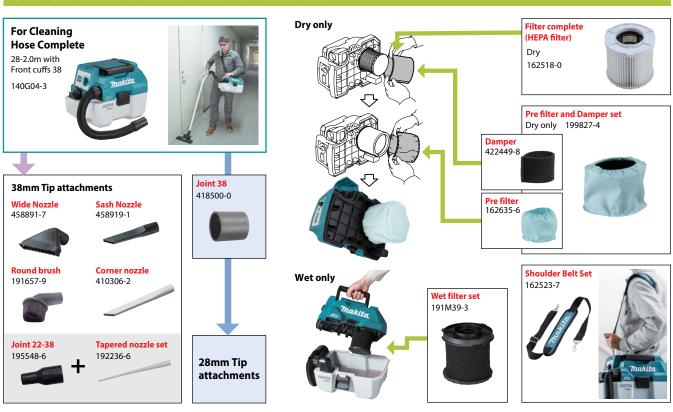




Backpack Vacuum Cleaner Model: VC008G, VC009G, DVC660, DVC665, DVC261, DVC265

VC011G, VC012G, DVC660, DVC665



VC008G, VC009G, DVC261, DVC265



ACCESSORIES (CLEANING EQUIPMENT)



Washable harness cover made of a mesh material for improved breathability

VC008G, VC009G, VC011G, VC012G, DVC261, DVC265

191Y14-1



Protection cover set

When using Backpack vacuum cleaner in tight spaces etc., Protection cover is very helpful to prevent the scratches on surrounding objects caused by hitting

DVC261, DVC265

1910S4-7

VC008G, VC009G


1911W4-1






Robotic Cleaner Model: DRC200, DRC300

DRC200

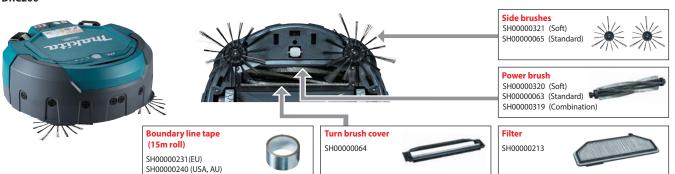















Magnet tape set

191P18-9 5m long,

Bottom plate assembly s

with double-sided tape



Filter H complete set

191P31-7 HEPA



Sponge sheet set

191P24-4

Sponge part to be attached to Bumper for protection of surrounding objects from damage



ACCESSORIES (CLEANING EQUIPMENT)



28mm Hose



Length (m)	Hose type	Front cuffs	Included Items	Part No.
1.0	Antistatic hose	without cuffs		143787-2
1.5	Antistatic hose	Front cuffs 38		152992-0
1.5	Antistatic hose	Front cuffs 38	Front cuffs 22	A-34235
2.5	Antistatic hose	Front cuffs 22	Front cuffs 38 Front cuffs 24	195437-5
3.5	Antistatic hose	Front cuffs 38	Front cuffs 22 Front cuffs 24	195433-3

Front Cuffs for 28mm hose or joint

Hose Side	Cuff Type	Part No.
28mm hose w/o cuffs	cuffs 22	195547-8
28mm hose w/o cuffs	cuffs 38	195545-2
Cuffs 22 or Cuffs 38	cuffs 24	195546-0
Cuffs 24	cuffs 22	192349-3
Cuffs 22	For 18-21mm pipe	192202-3
	28mm hose w/o cuffs 28mm hose w/o cuffs Cuffs 22 or Cuffs 38 Cuffs 24	28mm hose w/o cuffs 22 28mm hose w/o cuffs cuffs 38 Cuffs 22 or cuffs 38 Cuffs 38 Cuffs 24 cuffs 22 For Cuffs 22 Cuffs 22 For 18-21mm

Hose band





Hose Size	Part No.
28/32/38	166116-2

28mm Bending pipe



Matching hose set / Matching cuffs	Matching pipe	Part No.
28mm hose w/o cuffs	28L	127093-3
	28	126756-8


Straight pipe 28L & 28





Joint type	Part No.	Third party vacuum cleaner nozzles
C38	191M79-1	Proteam Side Winder
B35	191M78-3	KARCHER Nilfisk
A32	191M77-5	PACVAC SHOPVAC Proteam

Aluminum pipe 32



Item	Description	Material	Part No.
1	Aluminum joint pipe 32 (L=465mm)	Aluminum	199844-4
2	Aluminum straight pipe 32 (L=465mm)	Aluminum	199843-6

Hose 38mm



Length (m)	Hose type	Front cuffs	Part No.
1.5	Antistatic hose	Front cuffs 38	198757-6
2.5	Antistatic hose	Front cuffs 38	195434-1

Joint 38mm hose

Т	ype	Hose Side	Nozzle side	Part No.
Front cuffs 24		Cuffs 22 or Cuffs 38	Cuffs 24	195546-0
Joint 22-38		Cuffs 38	Cuffs 22	195548-6
Joint 38		Cuffs 38	Nozzle 28	418500-0
Joint 25 set	economic services	Cuffs 38	70mm pipe with O-ring	181575-9

Nozzle assembly for vacuum & blow






Model	Size (mm)	Part No.
DUB182, DVC350	220	132025-7
UB100D, UB101D, DUB185, DUB186 UB1102, UB1103	220	123245-4
	430	123246-2



Makita

OUTDOOR POWER EQUIPMENT

A wide variety of Lithium-ion Garden Tools

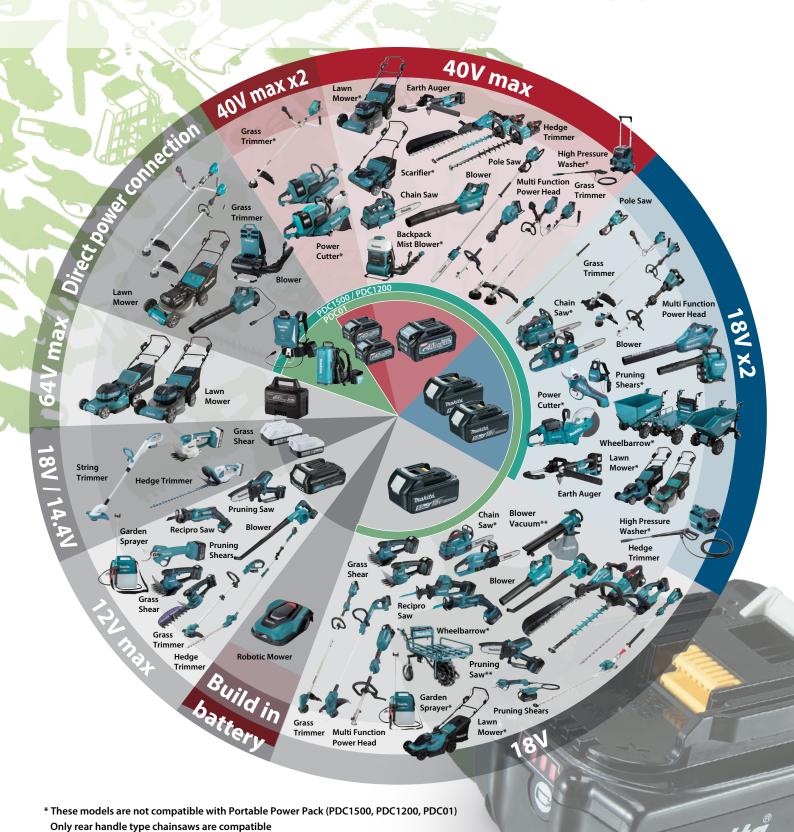

** These models are not compatible with Portable Power Pack (PDC1500, PDC1200)

^Some models are not for local sale

Portable Power Pack

1,500Wh-class high capacity

Portable Power Pack

PDC1500

More robust appearance and increased strength

Achieved by:

- · New stand with increased strength obtained by using a larger diameter metal pipe
- Metalized junctions between battery and harness









Height-adjustable waist belt

Quickly removable harness

Reflectors

Compatible with a wide range of applications (both in backpack and







Charger DC4001 Part No. 191L01-2 Charging time PDC1500: 450 min. PDC1200: 360 min.



PDC01

Powered by up to four 18V LXT batteries

432 Wh high capacity (with 4 pcs. of BL1860B) (Batteries sold seperately)

IPX4





Power Converter

Transform DC power into AC power instantly!

- Power converter powered by Makita portable power pack
- Turns DC power into AC power, is optimal for a wide range of applications
- Battery charging or use of corded tools in outdoor job sites where AC outlet is not available
- Emergency power source of outdoor leisure activities
- 7-stage output indication by 7 LED lamps
- Can be connected firmly with accessories of MAKPAC system, allowing for easy transportation on MAKPAC trolley or cart









PDC1500A01 Portable Power Pack



1,500Wh-class High Capacity, High Output Power



43.55 Ah Energy capacity 1,567.8 Wh Number of cells 130 Charging time 450 min. Dimensions (LxWxH) w/o Harness: 369 x 312 x 131 mm (14-1/2 x 12-1/4 x 5-1/8") 10.9 - 12.9 kg Net weight (24.0 - 28.4 lbs.)* Power supply cord Battery side: 1.2 m (3.9 ft) Adapter side: 0.6 m (2.0 ft)







Harness, Charger *not covered by EPTA-Procedure

PDC1200A01 / A02 Portable Power Pack

1,200 Wh high capacity

40Vmax 18V x2



Capacity Energy Capacity Number of Cells Charging Time (hours) Power Supply Cord

Dimensions (LxWxH)

33.5 Ah 1,206 Wh 100 6 Battery Side: 1.1 m (3.6 ft)

Net weiaht

Adapter Side: 0.6 m (2.0 ft) w/o Harness: 369 x 261 x 139 mm (14-1/2 x 10-1/4 x 5-1/2") w/ Harness: 428 x 261 x 164 mm (16-7/8 x 10-1/4 x 6-1/2") 8.8 ka (19.4 lbs.)





€XGD LXT IPX4 WG

Harness, Adapter for 36V (18V x2) [countries-specific], Charger. * PDC1200A01 (1x 18V+18V Adaptor)

PDC01 (191A62-6 / 191A67-6) Portable Power Pack





24/12 Ah Capacity 432 Wh 400x195x132mm Energy Capacity Dimensions (15-3/4"x7-5/8"x5-3/16") 1.7 kg (5.6 lbs.) Net weigh:

18V LXT IPX4

Harness, Adapter. * 191A62-6 (18V+18V and 18V Adaptor), 191A67-6 (18V + 18V Adaptor only)

OUTDOOR POWER EOUIPMENT



New

UB001GM201(RMX) / GZ Cordless Blower

Powerful blowing force (Max 17N)



15.8 m³/min (554 CFM) Max Air Volume Max Air Velocity No Load Speed (RPM) 62 m/s (140 MPH) 0-23,000 Dimensions (LxWxH) 850-950x167x297mm (33-1/2-37-1/2x6-9/16x11-3/4") Net weight 3.1 - 3.9 kg (6.8 - 8.6 lbs.)

UB003CZ Battery Powered Blower

Powerful blowing force (Max 24N)



Max Air Volume w/ End nozzle, w/ PDC1500. Max speed mode. 17.6 m³/min w/ End nozzle, w/ PDC1500, Max Air Velocity Max speed mode: 86.0 m/s w/End nozzle, w/ PDC1500, Max speed mode: 11.7 - 71.9 m/s Avg. Air Velocity w/End nozzle, w/PDC1500, Max speed mode: 0.7 - 24 N Mode1 / Mode2 / Mode3: Blowing Force

No Load Speed (RPM) 4,000-10,600/17,700/ 22,100 min⁻¹ w/Nozzle:

Dimensions 913 - 1,013 x 178 x 298 mm 2.8 - 3.1 kg (6.2 - 6.8 lbs.) (LxWxH) Net weight









Shoulder Belt, End Nozzle, Flat Nozzle, Extension Nozzle (country-specic), Adapter Pipe (country-specic), Battery, Charger, Z: Battery and Charger are sold separately















UB003C

Average blowing force

Max air volume 17.6 m³/min Max air velocity **86.0** m/s **Charging time** 450 min. with DC4001

PDC1500

Maximum speed mode or maximum speed with the cruise control lever, with PDC1500 / With standard nozzle attached

UB001CZ Battery Powered Blower

maximum speed with the cruise control lever / With standard nozzle attached

Powerful blowing force (Max 20N)



Max Air Volume Cruise Control Mode: 0 - 15.0 m³/min Boost Mode: 17.6 m³/min Max Air Velocity Cruise Control Mode: 0-60 m/s Boost Mode: 70 Cruise Control Mode: 0-50 m/s Avg. Air Velocity Boost Mode: 58 Cruise Control Mode: 0 - 15.0 Boost Mode: 20.0 Cruise Control Mode: Blowing Force No Load Speed (RPM) 0-21,000 Boost Mode: 24,000 960 - 1,060 x 295 x 180 mm Dimensions (LxWxH) Net weight 2.6 - 2.9 kg (5.7 - 6.5 lbs.)









Shoulder Belt, End Nozzle, Flat Nozzle (country-specific), Extension Nozzle (country-specific), Adapter Pipe

UB002CZ01 Battery Powered Backpack Blower

BL Brushless Battery Powered Variable Speed Blower



Max Air Volume Max Air Velocity

w/ End nozzle: 0 - 71.7 m/s w/ Flat nozzle: 0 - 76.0 m/s Blowing Force 0-22.0 N No load speed (RPM)
Continuous run time
on a full battery charge 0-22.000 Sound power level Dimensions (LxWxH)

95.5 dB(A) w/o Nozzle: 267 x 565 x 715 mm

w/End nozzle:

0 - 19.0 m³/min w/ Flat nozzle:

0-17.9 m³/min

Net Weight

Adapter Pipe, Flat Nozzle, Extension Nozzle



DUB363ZV Cordless Blower

Able to use both in Blower and Vacuuming applications





Max Air Volume 13.4 m³/min (473 CFM) Max Air Velocity No Load Speed (RPM) 0-7.850 Dimensions (L x W x H)

w/3-Stage Telescopic Long Nozzle: 737/786/836x200x415 mm (7-7/16"/31"/ . 33"x7-7/8"x16-3/8") 4.3 - 6.6 kg (9.4 - 14.6 lbs.)

DUB362Z Cordless Blower

Brushless Cordless Variable 6-Speed Blower





Capacity (Ah) Energy Capacity (Wh) Max Air Volume Max Air Velocity No Load Speed (RPM) Sound Power Level Dimensions

OUTDOOR POWER EOUIPMENT

90x2 / 108x2 13.4 m³/min (473 CFM) 54 m/s (120 MPH) 11.400 - 21.500 93.5 dB(A) 830/880/930x205x295mm (32-3/4"/34-3/4"/36-5/8" x8-1/8"x11-5/8") 3.5 kg (7.7 lbs)

5.0 / 6.0











Vacuum kit, Flat Nozzle, End Nozzle, Pipe, Shoulder Belt, Hex Wrench, Battery, Charger, Z: Battery and Charger are sold separately


Net weiaht











DUB184Z Cordless Blower

18V LXT BL Brushless Cordless Variable Speed Blower





Max Air Volume Max Air Velocity No Load Speed (RPM) Continuous Use (min.)

Sound Pressure Level Sound Power Level Dimensions(LxWxH)

825x160x285mm (32-1/2"x 6-5/16"x11-1/4") Net weight

0 - 18,000

w/BL1860B: 12

13.0 m³/min (459 CFM) Li-ion Ab 6.0 5.0 3.0 1.5 52.1 m/s (116 MPH)

w/BL1850B: 10 86 6 dR(A) 93.5 dB(A) w/BL1830B/BL1850B/ BL1860B:

2.5 - 3.0 kg (5.4 - 6.7 lbs.)



18V LXT BL Cordless Variable Speed Blower Vacuum



No load speed (RPM) 9,000-13,500 Max air volume (Vacuum) 6.1 m3/min Max sealed suction 3.3 kPa Dust bag capacity Max air volume 25 L Blower: 4.2 m³/min Vacuum: 6.1 m³/min Blower: 64.0 m/s Max air velocity Max sealed suction Vacuum: 3.3 kPa

Dimensions 1,168 x 164 x 416 mm (LxWxH)(46 x 6-1/2 x 16-3/8") Net weight 3.7 - 4.0 kg (8.2 - 8.8 lbs.)






Shoulder Belt, Nozzle, Battery, Charger, Hex Wrench, Z: Battery and Charger are sold separately









Dust bag, Shoulder belt, Battery, Charger, Z: Battery and Charger are sold separately

Dust bag capacity

dust bag with a

DUB187 Cordless Blower Vacuum powered by 18V LXT Li-lon battery



Variable speed control by trigger + Cruise control

Cruise control lever allows user to lock the variable speed control trigger at the desired power level.

acuum/Blowe

Single action level for blower / vacuum

mode selection

3.2 m3/min

large inlet opening Continuous run time (approx.)

/acuum Mode / Blower Mode

on a full battery charge: minutes

🕇 min With BL1860B battery



18V LXT Cordless Variable 3-Speed Blower

DUB186Z Cordless Blower



Max Air Volume Max Air Velocity
No Load Speed (RPM) Sound Power Level nensions (L x W x H)

68 m/s 0 - 18,000 92.4 dB(A) w/BL1815N: 859x156x195 mm (33-3/4"x6-1/8"x7-5/8") w/BL1830B/BL1850B/ BL1860B: 861x156x210 mm (34"x6-1/8"x8-1/4") 1.6 - 2.1 kg (3.5 - 4.6 lbs.)

UB101DZ Cordless Blower

12Vmax CXT Cordless Variable 3-Speed Blower





Max Air Volume Max Air Velocity Max Sealed Suction No Load Speed (RPM) Blowina Force

56 m/s N/A kPa 0 - 15,800 1.6 N w/BL1016, High/Mid/ Low: 7/20/45 w/BL1016/BL1021B: Dimensions (LxWxH)

849 x 155 x 184 mm (33-1/2 x 6-1/8 x 7-1/4") w/ BL1041B: 852 x 155 x 202 mm (33-1/2 x 6-1/8 x 8") 1.4 - 1.9 kg (3.1 - 4.2 lbs.)

2.6 m³/min

Net weight



Garden Nozzle, Flexible Hose (country-specific), Battery, Charger, DZ: Battery and Charger are sold separately







Garden Nozzle, Battery, Charger, Z: Battery and Charger are sold separately

Net weiaht

OUTDOOR POWER EQUIPMENT



2.6 m³/min

75 m/s 4.0 kPa

DUB185Z Cordless Blower

18V LXT Cordless Variable 3-Speed Blower

Li-ion Ah 6.0 5.0 3.0 1.5



3 LXT 3

Nozzle, Battery, Charger, Z: Battery and Charger are sold separately

Max Air Volume Max Air Velocity
Max Sealed Suction No Load Speed (RPM) Blowina Force Sound Power Level Dimensions (LxWxH)

3.2 m3/min 5.8 kPa 0 - 18,000 3.1 N 94 dB(A) w/BL1815N: 515x156x195 mm (20-1/4"x6-1/8"x7-5/8") w/BL1830B/BL1850B/ BL1860B: 517x156x210 mm (20-3/8"x6-1/8"x8-1/4") 1.6 - 2.1 kg (3.5 - 4.6 lbs.)



12Vmax CXT Cordless Variable 3-Speed Blower

Li-ion Ah 5.0 4.0 2.0 1.5



Max Air Volume Max Air Velocity
Max Sealed Suction No Load Speed (RPM) Blowing Force Run Time (min)

Dimensions (LxWxH)

0 - 15,800 1.8 N w/BL1016, High/Mid/ Low: 8/20/45 w/BL1016/BL1021B: 505 x 155 x 184 mm (19-7/8 x 6-1/8 x 7-1/4") w/BL1041B: 508 x 155 x 202 mm (20 x 6-1/8 x 8") 1.4 - 1.9 kg (3.1 - 4.2 lbs.)

Net weight

303 WW





Nozzle, Dust Bag (country-specific), Flexible Hose (country-specific), Battery, Charger, DZ: Battery and Charger are sold separately

UB1102 Blower

High output air volume



Continuous Rating Input 600W Air Volume Air Pressure 4.1 m³/min 5.7 kPa No Load Speed (RPM) 16.000 479x185x178 mm Dimensions . (L x W x H) Net Weight (18-7/8"x7-1/4"x7") 1.9 - 2.2 kg (4.3 - 4.8 lbs.) Power Supply Cord 2.5 m (8.2 ft.)

UB1103 Blower

High output air volume



303 🞹 Continuous Rating Input 600W Air Volume 0-4.1 m³/min 0-5.7 kPa Air Pressure (0-580 mmH₂O) 0-16,000 No Load Speed (RPM) 479x185x178mm Dimensions (18-7/8"x7-1/4"x7") (LxWxH)Net Weight 2.0kg (4.3bs) Power Supply Cord 2.5m (8.2ft)





Nozzle Assembly Front Cuffs 24, Poly Bag Set



Nozzle Assembly Front Cuffs 24, Poly Bag Set

UX01GZ Cordless Multi Function Power Head

High power BL motor enables to work under heavy load



No Load Speed (RPM) High: 0-9,700 Medium: 0-8,200 Low: 0 - 5,700 1,027 x 320 x 209 mm Dimensions (LxWxH) Net weight (40-1/2 x 12-5/8 x 8-1/4") 4.1 - 4.7 kg (9.3 - 10.6 lbs.)





No Load Speed (RPM) High: 0 - 9,700 Medium: 0-8,200 Dimensions (L x W x H) Low: 0 - 5,700 1,011 x 320 x 216 mm (39-3/4 x 12-5/8 x 8-1/2") 4.1 - 8.7 kg (8.9 - 19.2 lbs.)

Net weight











Harness, Safety Goggles, Hex Wrench, Accessory Bag, Z: Battery and Charger are sold separately









DUX18Z Cordless Multi Function Power Head

Multi Function System



No Load Speed (RPM)	High: 0 - 9,700
	Low: 0-6,800
Dimensions	w/BL1830B /BL1850B/
(L x W x H)	BL1860B:
	977 x 318 x 175 mm
	(38-3/4x12-1/2x6-7/8°)
Net weight	2.8 - 10.3 ka (6.2 - 22.7 lb



Harness, Safety Goggles, Hex Wrench, Accessory Bag, Z: Battery and Charger are sold separately

UC003GZ01 300mm (12") Cordless Chain Saw

40Vmax XGT BL Brushless Cordless 30 cm (12") Chain Saw





	Guide Bar Length	300 mm (12")
	Chain Pitch	3/8"
	Chain Gauge	1.1 mm (0.043")
	Chain Speed	0-24.8 m/s
		(0 - 1,490 m/min)
		(0 - 4,880 FPM)
	Chain Oil Tank Volume	200 mL (6.8 US oz)
	Dimensions	w/o Guide Bar
	(L x W x H)	:266 x 194 x 227 mm
		(10-1/2x7-5/8x8-15/16")
	Net weight	3.9 - 4.5 kg (8.6 - 9.9 lbs.)
	-	-







OUTDOOR POWER EOUIPMENT

Saw Chain, Guide Bar, Guide Bar Cover, Oil supply (country-specific), Round File (country-specific), Box Wrench, Battery, Charger, Z: Battery and Charger are sold separately

UC022GZ 350mm (14") Cordless Chain Saw

New

350 mm (14")

40Vmax XGT BL Brushless Cordless 35 cm (14") Chain Saw



Recommended guide	300-400 mm (12-16")
bar length	
Chain type	80TXL
Chain Pitch	0.325"
Chain Gauge	1.1 mm (0.043")
Chain Speed	0-25.5 m/s
Chain Oil Tank Volume	
Dimensions	w/o Guide bar, w/BL4050
(L x W x H)	430 x 225 x 271 mm
	(17 x 8-7/8 x 10-5/8")
Net weight	5.1 - 5.5 kg (11.2 - 12.1 lbs.,

Guide Bar Length

UC012GT101(RT) / GZ 400mm (16") Cordless Chain Saw





Li-ion Ah 8.0 5.0 4.0 2.5 2.0

Guide Bar Length	400 mm (16")
Chain Pitch	3/8"
Chain Gauge	1.1 mm (0.043")
Chain Speed	0-24.7 m/s
	(0 - 1,482 m/min)
	(0 - 4,862 FPM)
Chain Oil Tank Volume	230 mL (7.8 US oz)
Dimensions	w/o Guide Bar:
$(L \times W \times H)$	446 x 233 x 274 mm
	(17-1/2 x 9-1/8 x 10-3/4")
Net weight	6.0 - 6.5 kg (13.2 - 14.4 lbs.)









Z: Battery and Charger are sold separately

Slim body

42cc engine tool







High Speed cutting Compared to predecessor model

Cutting work amount About

Work volume on a single full battery charge

Photo: UC012G

Tnakita.

Center of gravity

% up • φ300mm cedar timber
• Guide bar/ Saw chain:
400mm/ 80TXL
• Battery : BL4050F

Max Chain Speed

Excellent tool balance

Saw Chain, Guide Bar, Guide Bar Cover, Oil supply (country-specific), Round File (country-specific), Box Wrench, Battery, Charger, Z: Battery and Charger are sold separately

UC015GT101(RT) / GZ 350mm (14") Cordless Chain Saw







350 mm (14")
3/8"
1.1 mm (0.043")
0-24.7 m/s
(0 - 1,482 m/min)
(0 - 4,862 FPM)
230 mL (7.8 US oz)
w/o Guide Bar
:446 x 233 x 274 mm
(17-1/2 x 9-1/8 x 10-3/4")
6.0 - 6.5 kg (13.2 - 14.4 lbs.)









Saw Chain, Guide Bar, Guide Bar Cover, Oil supply (country-specific), Round File (country-specific), Box Wrench, Battery, Charger, Z: Battery and Charger are sold separately

UC014GT101(RT) / GZ 300mm (12") Cordless Chain Saw

40Vmax XGT BL Brushless Cordless Chain Saw Li-ion Ab 8.0 5.0 4.0 2.5 2.0



Guide Bar Length	300 mm (12")
Chain Pitch	3/8"
Chain Gauge	1.1 mm (0.043")
Chain Speed	0-24.7 m/s
	(0 - 1,482 m/min)
	(0 - 4,862 FPM)
Chain Oil Tank Volume	230 mL (7.8 US oz)
Dimensions	w/o Guide Bar
(L x W x H)	:446 x 233 x 274 mm
	(17-1/2 x 9-1/8 x 10-3/4")
Net weight	6.0 - 6.5 kg (13.2 - 14.4 lbs.)

DUC353ZB 350mm (14") Cordless Chain Saw

High efficiency equivalent to 30mL class engine chain saws Li-ion Ah 6.0 5.0 3.0 1.5



	_	
	Guide Bar Length	350 mm (14")
	Chain Pitch/	9.5 mm (3/8")/
	Chain Gauge	1.1 / 1.3 mm (.043" / .050
	Chain Speed	0-20 m/s (0-1,200 m/mii
	Chain Oil Tank Volume	200 mL
	Sound Power Level	98.7 dB(A)
	Dimensions	762x215x235mm
	(LxWxH)	(30"x8-1/2"x9-1/4")
	Net weight	4.7 kg - 5.4kg (10.4 lbs -11.8lbs)









Saw Chain, Guide Bar, Guide Bar Cover, Oil supply (country-specific), Round File (country-specific), Box Wrench, Battery, Charger, Z: Battery and Charger are sold separately









Saw Chain, Guide Bar, Guide Bar Cover, Chain oil 100mL, Z: Battery and Charger are sold separately

OUTDOOR POWER EQUIPMENT

Trakita

DUC355Z 350mm (14") Cordless Chain Saw

High efficiency equivalent to 30mL class engine chain saws

Li-ion Ah 6.0 5.0 3.0 1.5



Guide Bar Length	350 mm (14")
Chain Pitch/	9.5 mm (3/8")/
Chain Gauge	1.1 / 1.3 mm (.043" / .050"
Chain Speed	0-20 m/s (0-1,200 m/mir
Chain Oil Tank Volume	200 mL
Sound Power Level	98.7 dB(A)
Dimensions	762x211x235mm
(LxWxH)	(30"x8-5/16"x9-1/4")
Net weight	4.7 kg - 5.4kg (10.4 lbs
	- 11 8lbs)

DUC306ZB 300mm (12") Cordless Chain Saw

High efficiency equivalent to 30mL class engine chain saws


Li-ion Ah 6.0 5.0 3.0 1.5



Guide Bar Lenath 300 mm (12") 9.5 mm (3/8") / 1.1 or 1.3 Chain Gauae mm (0.043" or 0.050") 0-20 m/s (0-1,200 m/ Chain Speed min) (0 - 3.940 FPM) Chain Oil Tank Volume Sound Power Level 200 mL (6.8 US oz) 103 dB(A) 270-651x205x232mm (10-5/8"-25-5/8"x (LxWxH) 8-1/8"x9-1/8") Net weight

4.6 - 5.1 kg (10.1 - 11.1 lbs.)











Saw Chain, Guide Bar, Guide Bar Cover, Chain oil 100mL, Wrench, Z: Battery and Charger are sold separately











DUC357ZX4 350mm (14") Cordless Chain Saw

Consistently powerful cutting action





Guide Bar Length 350 mm (14") Chain Pitch / 3/8" / 1.1 mm (0.043") or 1.3 mm (0.050") Chain Gauge 7.7 m/s 150 mL (5.1 US oz) Chain Speed Chain Oil Tank Volume Sound Power Level 97 dR(A) 762 x 214 x 234 mm(30 x Dimensions (LxWxH)8-3/8 x 9-1/4") 4.2 - 4.4 kg (9.3 - 9.7 lbs.)









Saw chain, Guide bar, Guide bar case, Round file (country-specific), Chain oil (country-specific), Battery, Charger, Z: Battery and Charger are sold separately

DUC254Z 250mm (10") Cordless Chain Saw

Efficiency equivalent to 23mL class engine chain saw





Guide Bar Length 250 mm (10") 3/8" / 1.1 mm (0.043") Chain Pitch / Chain Gauge 3/8" / 1.3 mm (0.050") 0-24 m/s (0-1,440 m/ Chain Speed min) (0 - 4,720 FPM) Chain Oil Tank Volume 140 mL Sound Power Level 103,2 dB(A) w/o Guide Bar: Dimensions (LxWxH)258x184x191 mm w/25 cm (10") 90PX Sprocket Nose Bar: 482x184x191 mm





Net weight

DUC150Z 150mm (6") Cordless Pruning Saw

New

Easy-to-use, compact product enables easy pruning of garden or orchard trees

Li-ion Ah 6.0 5.0 3.0 1.5



Guide bar length 150 mm (6") Saw chain Type: 80TXL Pitch: 0.325' Gauge: 1.1 mm (0.043") 8.0 m/s (480 m/min) (1,570 FPM) Chain speed Max cutting length Chain oil tank volume 161 mm 55 mL (1.9 USoz) Dimensions w/BL1830B/BL1850B/ (L x W x H) BL1860B: 459 x 90 x 249 mm (18 x 3-1/2 x 9-3/4", Net weight 1.7-2.0 kg (3.7-4.4 lbs.)





DUC150



Saw chain, Guide bar, Guide bar case, Round file (country-specific), Chain oil (country-specific), Battery, Charger, Z: Battery and Charger are sold separately

New Tool-less change and

Lightweight yet easy-to-use Movable guard Lock-off lever accessible covers the upper side of guide bar, from both sides and opens gradually wider as saw chain cuts deeper in branch. Makita Guide bar length 150_{mm} photo: DUC150 Rear hand guard





UC100DZ 100mm (4") Cordless Pruning Saw

Easy-to-use, compact product enables easy pruning of garden or orchard trees


Li-ion Ah 5.0 4.0 2.0 1.5



Guide bar length 100 mm (4") Type: 80TXL Pitch: 0.325" Gauge: 1.1 mm (0.043") 8.0 m/s (480 m/min) Chain speed (1,570 FPM) 55 mL (1.9 USoz)

Chain oil tank volume Dimensions (L x W x H) w/o Battery: 350 x 90 x 215 mm (13-3/4 x 3-1/2 x 8-1/2") w/BL1041B: 398 x 90 x 226 mm (15-5/8 x 3-1/2 x 8-7/8") 1.5-1.6 kg (3.3-3.5 lbs.) Net weight





Saw chain, Guide bar, Guide bar cover, Round file (country-specific), Chain oil (country-specific), Battery, Charger, DZ: Battery and Charger are sold separately

UC3541A 350mm (14") / UC4041A 400mm (16") Chain Saw

Excellent in heavy duty application





sions: excluding blade and guide ba

OUTDOOR POWER EOUIPMENT



Chain Blade, Guide Bar Cover, Hook Complete

UC3551A 350mm (14") / UC4051A 400mm (16") Chain Saw

Large trigger switch with soft start for smooth start-ups

153 🞹



Continuous Rating Input 2,000W Chain Speed Per Minute 870m (2,900ft)
Guide Bar Length UC3551A: 350r UC3551A:350mm (14") Saw Chain Pitch 3/8" Saw Chain Gauge 1.3mm (.050") Sound Power Level 101 8dR(A) Dimensions 505x200x220mm $(L \times W \times H)$ (19-7/8"x7-7/8"x8-5/8") Net Weight 5.5kg (12.1lbs) Power Supply Cord 0.3m (0.98ft)

Dimensions: excluding blade and guide ba

UC4551A 450mm (18") Electric Chain Saw

Heavy-duty for fast and efficient cutting

153 ////



Continuous rating input 2,000W Chain speed per minute 870 m (2,900 ft) Guide Bar Length 450 mm (18") Saw chain Pitch: 3/8" Gauge: 1.3 mm (0.050") 101.8 dB(A) Sound Power Level Dimensions 505x200x220 mm $(L \times W \times H)$ (19-7/8"x7-7/8"x8-5/8") 5.7 kg (12.4 lbs.)

Power supply cord 0.3 m (0.98 ft) Dimensions: excluding blade and guide ba

Net weight





Saw Chain, Guide Bar Cover, Hook complete



Saw Chain, Guide Bar, Guide Bar Case, Wrench, Band Assembly, Battery, Charger, Round File (country-specific), File (country-specific), Chain Oil (country-specific), Z: Battery and Charger are sold separately







Saw Chain, Guide Bar, Guide Bar Case, Wrench, Hex Wrench, Band Assembly, Battery, Charger, Round File (country-specific), File (country-specific), Chain Oil (country-specific), Z: Battery and Charger are sold separately

DUA301ZB 300mm (12") Cordless Telescopic Pole Saw

High cutting efficiency



Guide Bar Lenath 300 mm (12") Gauge: 1.1 / 1.3 mm (0.043 / 0.050") Pitch: 3/8" 0 - 20.0 m/s Chain Speed Oil Tank Capacity

(0 - 1,200 m/min) (0 - 3,940 FPM) 160 mL 2,554 - 3,789 x Dimensions 155 x 193 mm (100-1/2"-149 "x (LxWxH) 6-1/8" x 7-5/8") Net weiaht 7.8 - 8.5 ka

MO LET BL. AFT XPT 1

Saw Chain, Guide Bar, Blade Cover, Wrench, Band Assembly, Hex Wrench, Battery, Charger,

(16.8 - 19.6 lbs.)

Outdoor Power Equipment

OUTDOOR POWER EQUIPMENT







 The electric lift is limited to use on a flat ground, therefore, the machine is equipped with a level gauge to check the leveling of the machine.

Loading platform size: 965 x 645 mm (L x W)

• Reduces workload when dumping soil and other materials on the ground that are too heavy to lift manually.

[Tilts electrically up to 75°] (Tilts to 75° in approx. 30 seconds.)

• The electric dump is limited to use on a flat ground, therefore, the machine is equipped with a level gauge to check the leveling of the machine.



[Can be manually tilted for more than 75°]

capacity

Max load on flat ground (0 - 3 degrees)

300 kg

on slope (3 - 12 degrees)

180 kg

distance

Traveling 7.2 km

Traveling speed change

- Selection of 3 Forward speeds and F/R rotation by push button
- Stepless variable speed control by switch trigger in each range

Forward	Reverse
3 speeds	1 speed
(1.5/3.5/5.0 km/h)	(1.0 km/h)

Hand brake lever

- Brake for speed reduction while driving the wheelbarrow
- Can be used as a parking brake by locking this lever.

Electric brake plus Electromagnetic brake Electric brake **Electric brake**

- · You can minimize the chance of load collapse by releasing the switch trigger to activate soft electric brake.
- Powerful electromagnetic brake is activated to keep the motor braked when the driving speed decreases almost to 0km.





DCU602Z Battery Powered Wheelbarrow (Electric Dump)



DCU601Z Battery Powered Wheelbarrow (Electric Lift)

New

4-Wheel Battery Powered Wheelbarrow, Electric Lift



Travelina Speed Continuous use

> Max Climbing Capacity Dimensions (LxWxH)

Flat around (0 - 3 de-Max load capacity grees): 300 kg (661 lbs) Slope (3 - 12 degrees): 180 kg (397 lbs) Forward: 0-1.5/3.5/5.0 km/h Reverse: 0-1.0 km/h w/BL1860B x4: 100 min 475 - 1,020 mm Lift height (18-3/4 - 40-1/4")

> 1,400 x 730 x 820 - 1,030 mm 145 kg (320 lbs.)

MONA MID LXI BL XPT Z: Battery and Charger are sold separately

4-Wheel Battery Powered Wheelbarrow, Bucket with Electric Dump Li-ion Ah 6.0 5.0 3.0 1.5

Max load capacity Flat around (0 - 3 degrees): 300 kg (661 lbs) Slope (3 - 12 degrees):

Travelina Speed

Z: Battery and Charger are sold separately

18V x2



Trakita

DCU603Z Battery Powered Wheelbarrow

18V X2 (36V) LXT BL 4-Wheel Battery Powered Wheelbarrow, 300 Kg Capacity

Li-ion Ab 6.0 5.0 3.0 1.5

Max load capacity

Traveling Speed

Flat around (0 - 3 degrees): 300 kg (661 lbs) Slope (3 - 12 dearees): 180 kg (397 lbs) Forward: 0-1.5/3.5/5.0 km/h

Reverse: 0-1.0 km/h Max Climbing Capacity 12° 1,480 x 730 x 820 mm Dimensions (LxWxH)

(58-1/4 x 28-3/4 x 32-1/4") Net weight 122 - 124 ka (269 - 273 lbs.)





18V x2



DCU604Z Battery Powered Wheelbarrow

18V X2 (36V) LXT BL Brushless Battery Powered Wheelbarrow, 300 Kg Capacity

OUTDOOR POWER EOUIPMENT



Max load capacity Flat around (0 - 3 degrees): 300 kg (661 lbs) Slope (3 - 12 degrees): 180 kg (397 lbs) Travelina Speed Forward: 0-1.5/3.5/5.0 km/h Reverse: 0-1.0 km/h 12°

Max Climbing Capacity Dimensions (LxWxH) Net weiaht

1,450 x 730 x 820 mm (57 x 28-3/4 x 32-1/4") 119 - 120 kg (262 - 265 lbs.)



Z: Battery and Charger are sold separately

18V x2

DCU605Z Battery Powered Wheelbarrow

18V X2 (36V) LXT BL Brushless Battery Powered Wheelbarrow, 300 Kg Capacity



Max load capacity Flat ground (0 - 3 de-

Traveling Speed

Max Climbing Capacity (LxWxH)

Net weiaht

grees): 300 kg (661 lbs) Slope (3 - 12 degrees): 180 kg (397 lbs) Forward: 0-1.5/3.5/5.0 km/h Reverse: 0-1.0 km/h 12° 1,440 x 730 x 820 mm

(56-5/8 x 28-3/4 x 104 - 106 ka (229 - 234 lbs.)

MONA MID LXI BL WG





Z: Battery and Charger are sold separately

Moving cart powered by one or two LXT Li-ion batteries

Li-ion Ah 6.0 5.0 3.0 1.5

DCU180Z Battery Powered Wheelbarrow



Max Run Time (min) Max Load Capacity Traveling Speed

Max Climbing Capacity Dimensions (LxWxH)

Net weight

with BL1860B: 120 130 kg (290 lbs.) Forward, High / Low: 0 - 3.5 / 0 - 1.5 km/h Reverse: 0 - 1 km/h

When carrier is installed / During operation: 1.315x1.060x900 mm (51-3/4"x41-3/4"x35-1/2")

39.3 - 44.8 kg (86.5 - 98.7 lbs)

600 mm (23-5/8")

25.0 mm (1") High/Mid/Low:

81 dB(A)

92 dB(A)

4,000/3,000/2,000

UH014GM101(RM) / GZ 750mm (29-1/2") Cordless Hedge Trimmer

40Vmax XGT BL Brushless Cordless 75 cm (29-1/2") Hedge Trimmer





Blade Length Max Cutting Capacity Strokes Per Minute (SPM)

High/Mid/Low: 5,000/3,600/2,000 w/o Battery: 1,225 x 270 x 135 mm w/RI 4020 /RI 4025 1,225 x 270 x 135 mm w/BL4040: 1,225 x 270 x 150 mm w/RI 4050F 1,225 x 270 x 168 mm 4.0 - 4.7 kg (8.8 - 10.4 lbs.)

750 mm (29-1/2")

18 mm (11/16")

Net weiaht

Blade Cover, Safety Goggles (country-specific), Chip Receiver, Battery, Charger, Z: Battery and Charger are sold separately

UH006GZ 600mm (23-5/8") Cordless Hedge Trimmer

Lock Key, Support Legs, Wrenches, Z: Battery and Charger are sold separately

Reliable cutting performance like engine/AC hedge trimmers Li-ion at 5.0 4.0 2.5 2.0

SO 2 1 1 D LXT BL XPT



Blade Lenath Max Cutting Capacity Strokes Per Minute (SPM) Sound Pressure Level Sound Power Level Vibration Level

Front/Rear: 3.0/2.5 m/s² or less w/BL4020/BL4025: Dimensions 1,123 x 223 x 191 mm (44-1/4 x 8-3/4 x 7-1/2") (LxWxH) 4.4 - 5.0 kg (9.7 - 11.0 lbs.)

Blade Cover, Safety goggles (country-specific), Chip Receiver, Battery, Charger, Z: Battery and Charger are sold separately

DUH754SZ 750mm (29-1/2") Cordless Hedge Trimmer

18V LXT BL Brushless Cordless 75 cm (29-1/2") Hedge Trimmer





Blade Lenath Max Cutting Capacity
Sound Pressure Level Sound power level Vibration Level Strokes Per Minute (SPM)

Dimensions (LxWxH) Net weiahi

0-4.400/0-3.600/ 0 - 2,000 1,198x280x147 mm (47-1/4"x11"x5-3/4") 4.1 kg (9.0 lbs.)

750 mm (29-1/2")

23.5 mm (15/16") 80.6 dB(A)

2.5 m/s2 or less

High/Med/Low

91.6 dB (A)









Blade Cover, Safety Goggles (country-specific), Chip Receiver (country-specific), Battery, Charger, Z: Battery and Charger are sold separately

OUTDOOR POWER EOUIPMENT



DUH 604SZ 600mm (23-5/8") Cordless Hedge Trimmer

18V LXT BL Brushless Cordless 60 cm (23-5/8") Hedge Trimmer

Li-ion Ah 6.0 5.0 3.0 1.5



Blade Lenath Max Cutting Capacity Sound Pressure Level Vibration Level Strokes Per Minute (SPM)

Dimensions (LxWxH) Net weiaht

600 mm (23-5/8") 23.5 mm (15/16") 79.3 dB(A) 90.3 dB (A) 2.5 m/s2 or less High / Med / Low 0-4,400/0-3,600/

0 - 2,000 1,057x280x147 mm (41-1/2"x11"x5-3/4") 4.0 kg (8.8 lbs.)

DUH751Z 750mm (29-1/2") Cordless Hedge Trimmer

18V LXT BL Brushless Cordless 75 cm (29-1/2") Hedge Trimmer

Li-ion Ah 6.0 5.0 3.0 1.5



Blade Lenath 750 mm (29-1/2") High / Med / Low 0-4.400/0-3.600/ 0 - 2,000

Vibration Level $2.5 \, \text{m/s}^2$ 97 dB(A) 1,261x225x192 mm Sound Power Level Dimensions (LxWxH)

Net weiaht

(49-1/2"x8-7/8"x7-1/2") 3.8 - 4.5 kg (8.4 - 9.8 lbs.)











Blade Cover, Safety Goggles (country-specific), Chip Receiver (country-specific), Battery, Charger, Z: Battery and Charger are sold separately









Blade Cover, Safety Goggles (country-specific), Chip Receiver (country-specific), Battery, Charger, Z: Battery and Charger are sold separately

DUH 601Z 600mm (23-5/8") Cordless Hedge Trimmer

18V LXT BL Brushless Cordless 60 cm (23-5/8") Hedge Trimmer





Blade Length Strokes Per Minute (SPM)

Vibration Level Sound Power Level Dimensions (LxWxH)

600 mm (23-5/8") High / Med / Low: 0 - 4,400 / 0 - 3,600 / 0 - 2.000

2.5 m/s² or less

95 dR(A) 1,121x225x192 mm (44-1/4"x8-7/8"x7-1/2") 3.8 - 4.5 kg (8.4 - 9.8 lbs.)

DUH502Z 500mm (19-3/4") Cordless Hedge Trimmer

18V LXT BL Brushless Cordless 50 cm (19-3/4") Hedge Trimmer





Blade Length Strokes Per Minute (SPM)

Vibration Level Sound Power Level Dimensions (LxWxH)

500 mm (19-5/8") High / Med / Low: 0 - 4,400 / 0 - 3,600 / 0 - 2,000 2.5 m/s²

86 8 dR(A) 1,016x225x192 mm (40"x8-7/8"x7-1/2") 3.7 - 4.4 kg (8.2 - 9.7 lbs.)











Blade Cover, Safety Goggles (country-specific), Chip Receiver, Battery, Charger,









Blade Cover, Safety Goggles (country-specific), Battery, Charger, Z: Battery and Charger are sold separately

DUH606Z 600mm (23-5/8") Cordless Hedge Trimmer

18V LXT BL Brushless Cordless 60 cm (23-5/8") Hedge Trimmer

Li-ion Ah 6.0 5.0 3.0 1.5



Blade Length Max Cutting Capacity Strokes Per Minute

(SPM) Continuous Use (min.) Dimensions (LxWxH) Net weight

600 mm (23-5/8") 20.0 mm (13/16") 4.000

w/BL1860B: 70 1,016 x 207 x 185 mm (40 x 8-1/8 x 7-1/4") 2.7 - 3.0 kg (6.0 - 6.6 lbs.)

DUH506Z 500mm (19-3/4") Cordless Hedge Trimmer

18V LXT BL Brushless Cordless 50 cm (19-3/4") Hedge Trimmer

Li-ion Ah 6.0 5.0 3.0 1.5



Blade Length Max Cutting Capacity Strokes Per Minute (SPM) Continuous Use (min.) Dimensions (LxWxH) Net weight

20.0 mm (13/16") 4.000 w/BL1860B: 75 897 x 207 x 185 mm (35-1/4 x 8-1/8 x 7-1/4") 2.5 - 2.9 kg (5.5 - 6.4 lbs.)

500 mm (19-5/8")

2.7 - 3.0 kg (6.0 - 6.6 lbs.)

500 mm (19-5/8")











Blade Cover, Battery, Charger, Z: Battery and Charger are sold separately









Blade Cover, Battery, Charger, Z: Battery and Charger are sold separately



DUH507F001 / Z 500mm (19-3/4") Cordless Hedge Trimmer

Large main switch lever for improved switch operation

Li-ion Ah 6.0 5.0 3.0 1.5




Blade Lenath Effective cutting length Max branch dia. Tooth spacing Strokes Per Minute (SPM) Continuous Use (min.)

498 mm (19-5/8") 15 mm (9/16") 28 mm (1-1/8") 2.700 w/BL1830B:77 w/BL1830B/BL1850B/ Dimensions (LxWxH) BL1860B: 925 x 209 x 188 mm (36-1/2 x 8-1/4 x 7-3/8")

Net weight



Blade cover, Battery, Charger, Z: Battery and Charger are sold separately





UH353DSA / DZ mm (13-3/4") Cordless Hedge Trimmer

Lightweight, Low Vibration, Low Noise





Max Output Power 170W Cycles Per Mintue (cpm) Strokes Per Minute (SPM) 1,6500 3.300 Cutting width 350 mm (13-3/4") Max Cuttina Capacity 15mm (9/16) 693 x 175 x 165mm (27-1/4 x 6-7/8 x 6-1/2) Dimensions (LxWxH)Net weight 2 - 2.1 kg (4.3 - 4.7 lbs.)

DUN500WZ 500mm (19-3/4") Cordless Pole Hedge Trimme

18V LXT BL Brushless Cordless Pole Hedge Trimmer



Blade Lenath Max Cutting Capacity Sound Pressure Level Sound Power Level Vibration Level Left hand (Front grip / Handle) Right hand (Rear grip) Strokes Per Minute (SPM)

Overall lenath Net weight

Blade Length

Dimensions

(LxWxH)

Net weight

(SPM)

Max Cutting Capacity Strokes Per Minute

Cycles Per Minute (CPM)

OUTDOOR POWER EOUIPMENT

500 mm (19-3/4") 23.5 mm (15/16") 81.5 dB(A) 92.5 dB (A)

4.7 m/s2 2.5 m/s2 or less High / Med / Low: 4,400/3,600/2,000

460 mm (18-1/8")

133 mm (74-1/2 x 99 x 3-7/16 x 5-1/4")

18 mm (11/16") 3,600

3.0 kg (6.6 lbs.)

1,800 1 889 - 2 511 x 87 x

2.115 mm 4.5 kg (9.9 lbs.)



UN460WDWA/WDZ

Li-ion Ah 5.0 4.0 2.0 1.5

460mm (18-1/8") Cordless Pole Hedge Trimmer



Blade Cover, Harness, Battery, Charger, Z: Battery and Charger are sold separately

12Vmax LXT Cordless 46 cm (18-1/8") Pole Hedge Trimmer







Blade Cover, Battery, Charger, DZ: Battery and Charger are sold separately

DUN461WSF/WZ 460mm (18-1/8") Cordless Pole Hedge Trimmer





Blade Length 460 mm (18-1/8") Max Cutting Capacity 18 mm Strokes Per Minute (SPM) 3,600 18 mm (11/16") Cycles Per Minute (CPM) 1.800 Continuous Use (min.) w/BL1830B: 60 Dimensions 1.889 - 2.511 x 87 x 133 (LxWxH) mm (74-1/2 - 99 x 3-7/16 x 5-1/4") Net weight w/BL1860B: 3.4 kg (7.5 lbs.)





Blade Cover, Chip Receiver (country-specific), Shear Blade (country-specific), Battery, Charger, DZ: Battery and Charger are sold separately



Blade Cover, Chip Receiver (country-specific), Shear Blade (country-specific), Battery, Charger, Z: Battery and Charger are sold separately

UH201DZ

200mm (7-7/8") Cordless Hedge Trimmer







Blade Length 200 mm (7-7/8") Strokes Per Minute (SPM) 2,500 504 x 120 x 131mm (19-7/8"x4-3/4"x5-1/8") Dimensions (LxWxH) Net Weight 1.3 - 1.5 kg (2.8 - 3.3 lbs)

DUM604SF / Z 160mm (6-5/16") Cordless Grass Shear

18V LXT Li-Ion Cordless 16 cm (6-5/16") Grass Shear

Li-ion Ah 6.0 5.0 3.0 1.5



Cutting Width 160 mm (6-5/16") Depth Adjustment 15, 20, 25 mm (9/16", 13/16", 1") Strokes Per Minute (SPM) 2,500 with BL1860B/BL1850B/ BL1840B/BL1830B/ Continuous Use (min.) RI 1820B / RI 1815N: 250/200/160/125/ 80/60 Dimensions 337x177x131 mm (L x W x H) Net weight (13-1/4"x7"x5-1/8") 1.4 - 1.8 kg (3.2 - 4.0 lbs)





Grass Receiver, Blade Cover, Z: Battery and Charger are sold separately

12Vmax





Base Frame, Blade Cover, Battery, Charger, DZ: Battery and Charger are sold separately

DUM111SYX 110mm Cordless Grass Shear





Cutting Width 110 mm Strokes Per Minute (SPM) 2,500 with BL1860B/BL1850B/ Continuous Use (min.) BL1830B/BL1820B/ BL1815N: /-/-/-/45 Dimensions (LxWxH) 333 x 120 x 131 mm Net weight 1.4 - 1.7 kg (3.2 - 3.8 lbs.)





Blade Cover, Battery, Charger, Z: Battery and Charger are sold separately



OUTDOOR POWER EOUIPMENT



UM600DSYEX / DWA / DZ

12Vmax CXT Li-Ion Cordless 16 cm (6-5/16") Grass Shear



Cuttina Width 160 mm (6-5/16") Strokes Per Minute (SPM) 2,500 329x177x131 mm Dimensions (13"x7"x5-1/8") 1.3 - 1.5 kg (2.8 - 3.3 lbs) Net Weiaht





Base Frame, Blade Cover, Battery, Charger, DZ: Battery and Charger are sold separately

UR012GZ04 Cordless Grass Trimmer

80Vmax XGT BL ADT AFT Cordless 3-Speed Grass Trimmer, Bike Handle



Cuttina Width Metal Blade: 305 mm Metal Blade: 305 mm TCT Saw Blade: 255 mm Chisel Blade: 225 mm Nylon Cutting Head: 480 mm Shredder Blade: 270 mm Plastic Blade: 305 mm Plastic Blade: 305 mm Metal Blade (3/2/1): 0-6,800/0-5,000/0-3,500 Nylon Cutting Head (3/2/1): 0-5,000/0-4,200/0-3,500 Plastic Blade (3/2/1): 0-6,800/0-5,000/0-3,500 M10x1.25LH 8.0-9.3 kg (17.6-20.5 lbs.) No Load Speed (RPM) Spindle Size Net weight







Safety Goggles, Metal Blade / Nylon Cutting Head / Plastic Blade (country-specific), Blade Cover (for the product with metal blade), Accessory Bag, Hex Wrench, Box Wrench, Shoulder Belt, Battery, Charger, Z: Battery and Charger are sold separately

UR013GZ03 Cordless Grass Trimmer

40Vmax XGT BL AFT Cordless Grass Trimmer, Bike Handle



Cutting Width Metal Blade: 255 mm Chisel Blade: 225 mm Nylon Cutting Head: 450 mm Shredder Blade: 270 mm Plastic Blade: 305 mm 0-6,700 M10x 1.25 LH No Load Speed (RPM) Spindle Size 1,905 x 688 x 574 mm (LxWxH)(75 x 27x 22-5/8") 5.9 - 7.3kg (13.0 - 16.1 lbs.)









Metal blade / Nylon cutting head / Plastic blade (country-specific), Tool cover (country-specific), Accessory bag, Hex wrench, Box driver, Shoulder belt, Battery, Charger, Z: Battery and Charger are sold separately

UR008GM101(RM) / GZ01 Cordless Grass Trimmer

40Vmax XGT BL ADT AFT Cordless 3-Speed Grass Trimmer, Loop Handle



Cutting Width Nylon Cutting Head: 430 mm (17") Plastic Blade: 305 mm (12") Nylon Cutting Head (3/2/1): 0-5,000/0-4,600/0-4,000 No Load Speed (RPM) Plastic Blade (3/2/1): 0-6,000/0-4,600/0-4,000 Spindle Size M10 x 1.25 LH w/o Cutting Tool, (LxWxH)w/o Battery: 1,803 x 224 x 300 mm (71 x 8-7/8 x 11-3/4") 5.0 - 5.7 kg (11.0 - 12.6 lbs.) Net weight







Cutting Width



Metal blade: 230 mm (9")

Safety Goggles, Nylon Cutting Head, Accessory Bag, Hex Wrench, Battery, Charger 7: Battery and Charger are sold separately

UR003GZ Cordless Grass Trimmer

40Vmax XGT BL ADT AFT Cordless 3-Speed Grass Trimmer, Loop Handle



Metal Blade: 230 mm (9") Cutting Width Nylon Cutting Head. 350 mm (13-3/4") Plastic Blade: 255 mm (10") High/Mid/Low: 0-6,500/5,300/3,500 No Load Speed (RPM) Spindle Size M10x 1.25 LH w/o Cutting Tool, w/BL4020 Dimensions (LxWxH)/BL4025 / BL4040: 1735 x 355 x 230 mm (68-1/4 x 14 x 9") 4.1 - 4.7 kg (9.0 - 10.4 lbs.) Net weight









Safety Goggles, Metal Blade / Nylon Cutting Head / Plastic Blade (country-specific), Blade Cover (for the product with netal blade), Accessory Bag, Hex Wirench, Box Driver, Shoulder Belt, Battery, Charger, Z: Battery and Charger are sold separately



UR017GZ Cordless Grass Trimmer

40Vmax XGT BL ADT AFT Cordless 3-Speed Grass Trimmer, Loop Handle



Nylon cutting head: 330 mm (13") Plastic blade: 255 mm (10") High/Med./Low: 6,500/5,300/3,500 No Load Speed (RPM) Spindle size M10 x 1.25 LH 1,890 x 362 x 265 mm Dimensions (LxWxH)(74-1/2 x 14-1/4 x 10-3/8") 4.2 - 4.8 kg (9.3 - 10.6 lbs.) Net weight







Nylon cutting head, Plastic blade, Shoulder belt, Box driver, Hex wrench, Accessory bag, Battery, Charger, Z: Battery and Charger are sold separately

UR202CZ Battery Powered Grass Trimmer

BL ADT AFT Battery Powered 3-Speed Grass Trimmer



Cuttina Width Nylon cutting head: 430 mm (17") Plastic blade 305 mm (12") No Load Speed (RPM) Nvlon cuttina head (3 / 2/1):0-5,000/0-4,600 /0-4.000 Spindle Size M10 x 1.25 LH 1,783 x 226 x 300 mm Dimensions (LxWxH) (70-1/4 x 8-15/16 x 11-7/8") 5.5 - 6.1 kg (12.1 - 13.5 lbs.) Net weight









Safety Goggles, Metal Blade / Nylon Cutting Head / Plastic Blade (country-specific), Blade cover (for the product with metal blade), Accessory Bag, Hex Wrench, Box Driver, Shoulder Belt, Battery, Charger

Trakita.

DUR369LZ Cordless Grass Trimmer

18V X2 (36V) LXT BL ADT AFT Cordless 3-Speed Grass Trimmer



Cutting Width	Metal Blade: 255 mm (10") Trimmer Head: 430 mm (17") Plastic Blade: 305 mm (12")
No Load Speed (RPM)	High/Med/Low: 3,300-7,000/5,500/4,600
Spindle Size	M10x 1.25 LH
Dimensions (L x W x H) Net weight	1,846x400x269 mm (72-1/2"x15-3/4"x10-5/8") 5.8-6.4 kg (12.8-14.1 lbs.)

3,300-7,000/5,500/
Spindle Size M10x 1.25 LH
Dimensions 1,846x400x269 mn
(Lx Wx H) (72-1/2*x15-3/4*x1
Net weight 5.8-6.4 kg (12.8-14.



Safety Goggles, Metal Blade / Nylon Cutting Head / Plastic Blade (country-specific), Blade cover (for the product with metal blade), Accessory Bag, Hex Wrench, Shoulder Belt, Battery, Charger



DUR368LZ Cordless Grass Trimmer

18V X2 (36V) LXT BL ADT AFT Cordless 3-Speed Grass Trimmer

OUTDOOR POWER EOUIPMENT



Cutting Width	Metal Blade: 255 mm (10") Trimmer Head: 350 mm (13-3/4") Plastic Blade: 255 mm (10")
No Load Speed (RPM)	High/Med/Low: 6,500/5,300/3,500
Spindle Size	M10x 1.25 LH
Sound Power Level	4-Tooth Blade: 89.2 dB(A) Nylon Cutting Head: 89 dB(A)
Dimensions	1,758x362x231 mm
(L x W x H)	(69-1/4"x14-1/4"x9-1/8")
Net weight	3.9 - 4.5 kg (8.6 - 10.0 lbs.)

BV X2 PROPERTY AND AFT XPT



3 - 3.3 kg (6.6 - 7.3 lbs.)

Safety Goggles, Metal Blade / Nylon Cutting Head / Plastic Blade (country-specific), Blade cover (for the product with metal blade), Accessory Bag, Hex Wrench, Box Driver, Shoulder Belt, Battery, Charger

DUR189Z Cordless Grass Trimmer

18V LXT BL ADT Cordless Grass Trimmer, Short Telescopic Pipe, Loop Handle



Cutting Width
Trimmer Head:
300 mm (11-3/4")
Plastic Blade:
255 mm (10"))
No Load Speed (RPM)
High / Mid / Low / ADT
Mode: 6,000 / 5,000 /
4,000 / 4,000 - 6,000
Spindle Size
Max Run Time (min)
Mylon Cutting Head,
BL 1860B: 168
Plastic Blade,
BL 1860B: 219

Netweight



Shoulder Strap, Nylon Cutting Head, Plastic Blade, Safety Goggles, Accessory Bag, Hex Wrench, Battery, Charger, 7: Battery and Charger are sold separately

DUR194SFX2 Cordless Grass Trimmer

18V LXT Li-Ion Cordless 2-Speed Grass Trimmer, Loop Handle



Cutting Width Metal Blade: 200 mm (7-7/8") Trimmer Head: 280 mm (11") Plastic Blade. 230 mm (9") High / Low: 6,000 / 4,500 M10 x 1.25 LH No Load Speed (RPM) Spindle Size . Dimensions 1,630 x 288 x 236 mm (LxWxH)(64 x 11-3/8 x 9-1/4") Net weight 2.6 - 2.9 kg (5.7 - 6.4 lbs.)

18V @ 2 1 LXC XPT 1

Safety Goggles (country-specific), Shoulder Belt, Nylon Cutting Head, Metal Blade / Nylon Cutting Head / Plastic Blade (country-specific), Hex Wrench, Box Driver, Accessory Bag, Battery, Charger, Z: Battery and Charger are sold separately

Can be used with the following cutting tools Metal Blade Plastic Blade Nylon Cutting Head

DUR193SF / Z Cordless Grass Trimmer

18V LXT Li-lon Cordless Grass Trimmer



LXT XPT

Head: 110-1/4")
OB: 45
384 x
mm
/2 x 10-5/8 x
g (5.3 - 6.0 lbs.)

Safety Goggles (country-specific), Shoulder Belt, Nylon Cutting Head, Metal Blade / Nylon Cutting Head / Plastic Blade (country-specific), Hex Wrench, Box Driver, Accessory Bag, Battery, Charger, Z: Battery and Charger are sold separately

DUR181Z Cordless String Trimmer

18V LXT Li-Ion Cordless String Trimmer



Cutting Width	Trimmer Head: 260 mm (10-1/4")
	200 111111 (10-1/4)
No Load Speed (RPM)	7,800
Sound Power Level	88.5 dB(A)
Dimensions	1,229 - 1,433x267x
(LxWxH)	186 - 257 mm
	(48-1/2 - 56-1/2"x
	10-1/2"x7-3/8 - 10-1/8")
Max Run Time (min)	with BL1830B: 45
Net weight	2.8 - 3.1 kg (6.2 - 6.9 lbs)

Safety Goggles, Shoulder Belt, Nylon Cutting Head, Nylon Cord, Battery, Fast Charger Z: Battery and Charger are sold separately

OUTDOOR POWER EOUIPMENT

Trakita

UR100DWA / DZ Cordless Grass Trimmer

Compact size is ideal for trimming and precise edging



Cutting Width	Nylon Cutting Head : 260 mm (10") Plastic Blade : 230 mm (9")
No Load Speed (RPM)	10,000
Spindle Size	M8 x 1.25 RH
Dimensions	835-1,195x267x210-315
(LxWxH)	
Net weight	1.9 - 2.1 kg (4.3 - 4.6 lbs.)

UR3000 300mm (11-3/4") String Trimmer

Lightweight AC string trimmers for do-it-yourselfers



Continuous Ratina Input 450W Cutting Width 300 mm (11-3/4") No Load Speed (RPM) 9.000 Sound Power Level 96 dB(A) 1.016~1.256x301x262mm Dimensions (LxWxH)(40~49-1/2"x11-7/8"x10-3/8") Net Weight 2.6kg (5.7lbs) Power Supply Cord



Extension Cord with Lock, Shoulder Strap, Safety Goggles, Nylon Cord

12Vmax



BL6440 (4.0Ah)

BL64100 (10.0Ah)







Safety Goggles, Shoulder Belt, Nylon Cutting Head, Nylon Cord, Plastic Blade, Accessory Bag, Hex Wrench, Battery, Charger, DZ: Battery and Charger are sold separately

Greater Power Performance makita

LM004JZ 530mm (21") Cordless Lawn Mower

3 cutting modes (Normal/ Soft no-load/ Noise reduction)



Cutting Width 534 mm (21") Cutting Height 20 - 100 mm (13/16 - 3-15/16") Grass Box Capacity 70 L No Load Speed (RPM) 2,300 - 2,800 1.5 - 6.5 km/h39 Propelling speed Wheel diameter 230 / 230 mm (9 / 9") Dimensions 1,740 - 1,810 x 595 x 970 - 1,080 mm (68-1/2 -71-1/4 x 23-1/2 x 38-1/4 (LxWxH)

- 42-1/2") 31.5 - 34.6 kg Net weight (69.5 - 76.3 lbs.)







Blade, Mulching plug, Socket wrench, Rod, Discharge chute, Battery, Charger, Z: Battery and Charger are sold separately

LM 002JM 101 530mm (21") Cordless Lawn Mower

High power cordless lawn mower powered by 64Vmax (57.6V) Li-lon battery



534 mm (21") Cutting Width 20 - 100 mm Cutting Height (13/16 - 3-15/16") Grass Box Capacity 70 L No Load Speed (RPM) Actual Mowing Area 2 300 - 2 800 1,600 m² Continuous Use (min.) 39 2.5 m/s² or less Vibration Level 1,710 - 1,800 x 585 x 985 - 1,115 mm Dimensions (LxWxH)(67-1/2 - 71 x 23 x 38-3/4 - 44") Net weight 25.7 - 27.6 kg

64Vmax











Blade, Mulching Plug, Socket Wrench, Rod, Battery, Charger

LM001JM101 480mm (18-7/8") Cordless Lawn Mower

High power cordless lawn mower powered by 64Vmax (57.6V) Li-lon battery



480 mm (18-7/8") Cutting Width 20 - 100 mm Cutting Height (13/16 - 3-15/16") Grass Box Capacity 62 L No Load Speed (RPM) Actual Mowing Area 2 500 - 3 200 1,400 m² Continuous Use (min.) 34 Vibration Level 2.5 m/s² or less Dimensions 1,600 - 1,680 x 540 x (L x W x H)

955 - 1,080 mm (63 - 66 x 21-1/4 x 37-1/2 - 42-1/2") Net weight 24.4 - 26.1 kg









Blade, Mulching Plug, Socket Wrench, Rod, Battery, Charger

LM002GZ 530mm (21") Cordless Lawn Mower

40Vmax XGT BL Cordless 53 cm (21") Self-Propelled Lawn Mower



Cutting Width Cutting Height Grass Box Capacity

No Load Speed (RPM) Propelling speed Wheel diameter Dimensions (L x W x H)

Net weight

534 mm (21") 20 - 100 mm (13/16 - 3-15/16") 70 L 2.300 - 2.800 1.5 - 5.0 km/h 230 / 230 mm (9 / 9") During operation: 1,740 - 1,810 x 595 x 970 - 1,080 mm (68-1/2 - 71-1/4 x 23-1/2 x 38-1/4 - 42-1/2") 29.5 - 34.7 kg

(65.0 - 76.5 lbs.)

© 2 1 EL SOFT WG 1 Blade, Mulching plug, Socket wrench, Rod, Discharge chute, Battery, Charger, Z: Battery and Charger are sold separately

LM001GZ 480mm (18-7/8") Cordless Lawn Mower

40Vmax XGT BL Cordless 48 cm (18-7/8") Self-Propelled Lawn Mower Cutting Width



Cutting Height Grass Box Capacity No Load Speed (RPM) Propelling speed Wheel diameter

Dimensions (LxWxH) Net weight

480 mm (18-7/8") 20 - 100 mm (13/16 - 3-15/16") 62 L 2.500 - 3.200 1.5 - 5.0 km/h 230 / 230 mm (9 / 9") During operation: 1,670 - 1,745 x 550 x 965 - 1,075 mm (65-3/4 - 68-3/4 x 21-5/8 x 38 - 42-1/4") 28.0 - 33.0 kg (61.7 - 72.8 lbs.)

40Vmax © 2 1 COD BLAND WG 1 Blade, Mulching plug, Socket wrench, Rod, Discharge chute, Battery, Charger, Z: Battery and Charger are sold separately





LM004GZ 430mm (17") Cordless Lawn Mower

40Vmax XGT BL Cordless 43 cm (17") Lawn Mower



Cutting Width Cutting Height

(LxWxH)

Net weight

Grass Box Capacity No Load Speed (RPM) Continuous use (ap-prox.) on a full battery charge Wheel diameter Dimensions

430 mm (17") 20 - 75 mm (13/16 - 2-15/16") 50 L 3,800 min w/ BL4080F: 52 min

140 / 165 mm During operation: 1,390 - 1,440 x 460 x 990 1,020 mm 15.6 - 18.2 kg (34.4 - 40.1 lbs.)

LM003GZ 380mm (15") Cordless Lawn Mower



40Vmax XGT BL Cordless 38 cm (15") Lawn Mower



Cutting Height Grass Box Capacity No Load Speed (RPM) Continuous use (approx.) on a full battery charge Wheel diameter

OUTDOOR POWER EOUIPMENT

Cutting Width

Dimensions (LxWxH)

Net weight (32.8 - 38.1 lbs.)

140 / 165 mm During operation: 1,370 - 1,420 x 450 x 990 1,020 mm 14.9 - 17.3 kg

380 mm (15")

40 L 3,800 min⁻

20 - 75 mm (13/16 - 2-15/16")

w/ BL4080F: 49 min





Socket wrench, Blade, Mulching plug, Grass catcher, Battery, Charger,



Socket wrench, Blade, Mulching plug, Grass catcher, Battery, Charger, Z: Battery and Charger are sold separately



Continuous use*

LM003G (380mm) about

LM004G (430mm) about

49 min

52 min

LM004G (430mm)

Mowing area* LM003G (380mm)

about $80\,\mathrm{m}^2$

about 830 m²

*on a full battery charge (with BL4080F)

Grass level indicator **Grass catcher capacity** LM003G LM004G Warning lamp for Battery capacity, **40**L **50 High temperature** and Overload Photo: LM004G **Cutting, Collecting, Mulching Easier cutting height** *Mulching plug required.

Higher mowing performance

The blade is designed to tilt down towards the front of the mower when attached, minimizing double-cutting to reduce the load on the machine for reduced energy consumption, better feeling of cutting and improved grass collecting performance.



LM001CZ 534mm (21") Battery Powered Lawn Mower

Mows 5,700 m² with PDC1200



Cuttina Width Cutting Width
Cutting Height
No Load Speed (RPM)
Propelling Speed
Actual Mowing Area
*PDC01 (BL1860B X4)

Continuous Use (min. *PDC01 (BL1860B X4)

(L x W x H) Net weigh

534mm (21") 20-100mm (13/16-3-15/16") 2,300-2,800 2,5-5,0km/h w/PDC01. W/PDC01, \$elf-Propelled: 1,700 m² W/PDC01, push-drive: 2,300 m² W/PDC1200, \$elf-Propelled: 4,200 m² W/PDC1300, push-drive: 5,700 m² W/PDC1304-Fropelled: 400 W/PDC1200, \$elf-Propelled: 100 W/PDC1200, push-drive: 130 1,630-1,715x590x990-1,095mm 1,095mm 41.9-49.2 kg (92.4-108.5 lbs.)





DLM539Z 534mm (21") Cordless Lawn Mower

18V X2 (36V) BL Brushless Cordless 53 cm (21") Lawn Mower



Cutting Width Cutting Height

534 mm (21")

3.000

20 - 100 mm (13/16 - 3-15/16")

w/BL1860B x2, Push-Drive: 800 m² w/ BL1860B x2,

Self-Propelled: 22 w/BL1860Bx2,

2.5 - 5.0 km/h w/ BL1860B x2, Self-Propelled: 700 m²

No Load Speed (RPM) Propelling Speed Actual Mowing Area

Continuous Use (min.)

Push-Drive: 25 During Operation: 1,810 - 1,870 x 580 x 920 Dimensions (LxWxH) - 1,040 mm 28.0 - 30.5 kg Net weight

Blade, Mulch Plug, Socket Wrench, Rod, Battery, Charger, Z: Battery and Charger are sold separately

OUTDOOR POWER EOUIPMENT

Trakita

DLM538Z 534mm (21") Cordless Lawn Mower

18V X2 (36V) BL Brushless Cordless 53 cm (21") Lawn Mower



18V x2

Cutting Width Cutting Height 534 mm (21") 20 - 100 mm (13/16 - 3-15/16") No Load Speed (RPM) 3,000 w/RI 1860R x2 Continuous Use (min.)

Push-Drive: 800 m² w/BL1860B x2, Push-Drive: 25
During Operation:
1,810 - 1,870 x 580 x 920 Dimensions (L x W x H) 1.040 mm Net weight 25.6 - 28.1 kg (56.4 - 61.9 lbs.)



Blade, Mulch Plug, Socket Wrench, Rod, Battery, Charger, Z: Battery and Charger are sold separately

DLM533Z 534mm (21") Cordless Lawn Mower

18V X2 (36V) LXT BL Cordless 53 cm (21") Self-Propelled Lawn Mowe



Cuttina Width 534 mm (21") 20 - 100 mm (13/16" - 3-15/16") Cutting Height No Load Speed (RPM) 2,300 - 2,800 1,655-1,740x590x Dimensions (LxWxH) 990-1,100 mm (65"-68-1/2"x23-1/4"x39"-43-1/4") 42.8 - 46.7 kg Net weiaht (94.4 - 103 lbs.)



Blade, Mulch plug, Socket Wrench, Rod, Battery, Charger, Z: Battery and Charger are sold separately

DLM532Z / DLM530Z 534mm (21") Cordless Lawn Mower

18V X2 LXT BL Brushless Cordless Self-Propelled Lawn Mower (DLM532 only)



Cutting Width 534 mm (21") Cutting Height 20 - 100 mm (13/16" - 3-15/16") No Load Speed (RPM) 2,300 - 2,800 1,630-1,715x590x Dimensions (L x W x H) 990-1 190 mm (64″-67-1/2″x23-1/4″x

39"-46-3/4") Net weight DLM530Z: 35.5 - 39.3 kg (78.3 - 86.6 lbs.) DLM532Z: 39.0 - 42.8 kg (86.0 - 94.4 lbs.)



Blade, Mulch plug, Side Discharge Mouth, Socket Wrench, Rod, Battery, Charger,

DLM481Z 480mm (18-7/8") Cordless Lawn Mower

18V X2 (36V) BL Brushless Cordless 48 cm (18-7/8") Lawn Mower



Cutting Width 480 mm (18-7/8") Cutting Height 20 - 100 mm (13/16 - 3-15/16") 3,100 2.5 - 5.0 km/h No Load Speed (RPM) Propelling Speed Actual Mowing Area w/BL1860B x2, Self-Propelled: 650 m² w/BL1860B x2, Push-Drive: 800 m² w/BL1860B x2, Self-Propelled: 23 Continuous Use (min.) w/BL1860B x2. Push-Drive: 28 During Operation: 1,690 - 1,740 x 530 x 930 Dimensions $(L \times W \times H)$

- 1,060 mm 27.1 - 29.3 kg Net weight

Blade, Mulch Plug, Socket Wrench, Rod, Battery, Charger, Z: Battery and Charger are sold separately

DLM480Z 480mm (18-7/8") Cordless Lawn Mower

18V X2 (36V) BL Brushless Cordless 48 cm (18-7/8") Lawn Mower



Cutting Width 480 mm (18-7/8") Cutting Height 20 - 100 mm (13/16 - 3-15/16") No Load Speed (RPM) 3,100 w/BL1860B x2, Push-Drive: 800 m² Actual Mowing Area Continuous Use (min.) w/BL1860B x2. Push-Drive: 28 During Operation: 1,690 - 1,740 x 530 x 930 Dimensions (L x W x H) 1 060 mm Net weight 24.5 - 26.8 kg (54.0 - 59.1 lbs.)

18V x2

Blade, Mulch Plug, Socket Wrench, Rod, Battery, Charger, Z: Battery and Charger are sold separately

DLM462Z 460mm (18") Cordless Lawn Mower

18V X2 LXT BL Brushless Cordless 46 cm (18") Self-Propelled Lawn Mower




Cutting Height No Load Speed (RPM) Propelling speed Dimensions $(I \times W \times H)$ Net weiaht

Cutting Width

460 mm (18") 20 - 100 mm (13/16" - 3-15/16") 2,500 - 3,300 2.5 - 5.0 km/h 1,610-1,690x535x 980-1,095 mm (63-1/2"-66-1/2"x 21"x38-1/2"-43") 35.3 - 39.0 kg (77.8 - 86.0 lbs.)

460 mm (18")











Blade, Mulch plug, Socket Wrench, Rod, Battery, Charger, Z: Battery and Charger are sold separately

DLM460Z 460mm (18") Cordless Lawn Mower

Brushless Cordless 46 cm (18") 3-in-1 Mower



Blade Type Hole Diameter Cutting Width Cutting Height No Load Speed (RPM) Recommended mowina area Continuous Use (min.)

2,500 - 3,300 w/BL1860B x2 800 - 1,600 m w/BL1860B/BL1850B/ BL1840B/BL1830B/BL1820B/ BL1815N:21/18/14/10/8/6 Sound Power Level 91 dB(A) Dimensions (L x W x H) 1,319-1,518x532x 879-1,138 mm 25.3 - 27.6 kg (55.8 - 60.8 lbs.)

2 Tooth 10.0 mm (3/8") 460 mm (18")

20-75mm (13/16"-2-5/16")

2 1 LXT BL XPT 1

Blade, Socket Wrench, Battery, Fast Charger, Z: Battery and Charger are sold separately





DLM382CF2 / Z 380mm (15") Cordless Lawn Mower

2-in-1 Mower



Cuttina Width Cutting Height

20 - 75 mm (13/16" - 2-15/16") 3,700 No Load Speed (RPM) 1.380-1.410x450x Dimensions (L x W x H)

985-1,005 mm (54-1/4"-55-1/2"x17-. 3/4"x38-3/4"-39-1/2") 16.2 - 16.9 ka (35.7 - 37.3 lbs.)

380 mm (15")

Net weiaht



18V LXT Li-lon Cordless 330 mm (13") 3 in 1 Lawn Mower



Cuttina Width Cutting Height Grass Box Capacity

OUTDOOR POWER EOUIPMENT

No Load Speed (RPM) Actual Mowing Area Continuous Use (min.) Wheel Size

Dimensions (L x W x H)

20 - 75 mm (13/16 - 2-15/16") 4.300 w/BL1840B: 270 m² w/BL1840B: 14 Front / Rear: 140 / 180 mm (5-1/2 / 7-1/8") During Operation: 1,285 - 1.350 x 375 x 935 - 975 mm, When Stored (w/o Grass Box): 520 x 375 x 775 mm 11.6 - 12.5 kg

330 mm (13")

Net weiaht

Blade, Mulching Plug, Wrench, Battery, Charger, Z: Battery and Charger are sold separately

18V x2







Blade, Wrench, Battery, Charger, Z: Battery and Charger are sold separately

DLM230RG / Z 230mm (9") Cordless Lawn Mower

18V LXT Cordless 23 cm (9") 2-in-1 Lawn Mowe



Cutting Width Cutting Height Grass Box Capacity No Load Speed (RPM) Actual Mowing Area Continuous Use (min) Wheel Diameter Dimensions (LxWxH)

10 - 55 mm 20 L 7,000 w/BL1830B: 90 m² w/BL1830B: 6 min 130/55 mm During Operation: 860 - 1,105 x 256 x 680 - 920 mm, When Stored (w/o Grass Box): 264 x 363 x 780 mm 8.6 -8.9 kg

230 mm (9")

Net weight



Blade, Hex wrench, Rod, Battery, Charger, Z: Battery and Charger are sold separately

ELM4620 460mm (18-1/8") Electric Lawn Mower

1,800N 4-in-1 Electric Mower



Continuous rating input Cuttina Width Cutting Height No Load Speed (RPM) Recommended mowing area up to

460 mm (18-1/8") 20-75mm(13/16"-2-15/16") 2.950 800 m²



Blade, Wrench, Mulch Plug

ELM4121 410mm (16-1/8") Electric Lawn Mower

Stays upright for easy maintenance and cleaning



Continuous rating input 1,600W Cutting Width 410 mm (16-1/8") Cutting Height 20-75mm(13/16"-2-15/16") No Load Speed (RPM) 3,400 Recommended mowing 600 m² area up to

ELM3720 370mm (14-1/2") Electric Lawn Mower

Stays upright for easy maintenance and cleaning



Continuous rating input 1,400W Cutting Width 370 mm (14-1/2") Cutting Height No Load Speed (RPM) 20-55mm(13/16"-2-3/16") 3,400 Recommended mowing 500 m² area up to



Blade, Wrench

Blade, Wrench, Mulch Plug, Side Discharge Mouth

Stays upright for easy maintenance and cleaning

ELM3320 330mm (13") Electric Lawn Mower



Blade Wrench

Continuous rating input 1,200W Cutting Width Cutting Height 20-55mm(13/16"-2-3/16") No Load Speed (RPM) 3,400
Recommended mowing 400 m² area up to

UV001GZ Cordless Scarifier

40Vmax XGT BL Cordless 380mm (15") Scarifier



Cutting width Working depth

Continuous run time on full battery charge Actual mowing area on

full battery charge No load speed (RPM) Grass catcher capacity
Dimensions (L x W x H)

380 mm (15 ") -12 mm (-15/32") to 5 mm (+3/16") w/BL4080Fx2. Vertical cutter: 38 min Thatching blade: 41 min w/ BL4080F x2, Vertical cutter: 500 m² Thatching blade: 510 m² 3,200 50 L 1,020-1,240 x 680 x 915-1,155 mm 18.7-23.8 kg (41.2-52.5 lbs.)

40Vmax




Vertical cutter, Thatching blade, Socket wrench, Grass catcher, Battery, Charger, Z: Battery and Charger are sold separately

Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ by the type of battery.

Healthy Lawn Growth and Maintenance with Aeration & Thatching

Vertical cutting

Effect obtained at different working depth settings



Cutting through laterally growing lawn grasses for better looking lawn

Removing layers of lawn clippings, generated moss, etc.

Cutting through runners and roots for healthy growth of lawn

Loosening compacted hard surface layer of soil

18 stage (in 1mm increments)



Dial style working depth adjustment Fine adjustment of working depth can be made by operating a dial, allowing for adjustment of working depth to suit the environment for

+5 mm

-12 mm

. wn growth and wear of blade.

Thatching blade



Easy blade change



Photo: UP100E



Vertical cutter **Aeration applications**

Able to perform both thatching and vertical cutting to cut through runners and roots

For improved lawn rooting

water

Highly durable vertical cutter

- · Blunt angled blade tip slows blade wear to minimize the reduction in working depth.
- The slow wear reduces blade change frequency and running cost.

Low vibration

The blades of Vertical cutter are arranged symmetrically about the

left-right center line of the rotary blade shaft to provide balanced rotation for reduced vibration.

DUP361ZN

33mm (1-5/16") Cordless Powered Pruning Shears

Smooth cutting similar to that of a hand pruner



Max Output 200W Max cutting: 33mm Capacity Max blade opening: Dimensions (L x W x H) 305x43x106mm (12"x1-11/16"x4-3/16") 0.8 kg (1.8 lbs.)

18V x2





Oil supply, Wrench set, Diamond file, Cord holder complete (for waist belt), Holster, Harness, Arm band, Tool bag, Shear blade (U), Battery, Fast Charger, Z: Battery and Charger are sold separately

UP100DZ Cordless Pruning Shears

New

Shear blade control is interlocked with Trigger for easier control of the blade

Li-ion Ah 5.0 4.0 2.0 1.5



Capacity Vibration level Sound pressure level Dimensions (LxWxH)

Net weiaht

Max cuttina: 25 mm (1") 2.5 m/s2 or less 70 dB(A) or less w/o Battery: 259 x 53 x 98 mm (10-1/4 x 2-1/16 x 3-7/8") w/BL1016/BL1021B: 285 x 64 x 98 mm (11-1/4 x 2-1/2 x 3-7/8") w/BL1041B: 308 x 64 x 98 mm (12-1/8 x 2-1/2 x 3-7/8")

(2.0 - 2.4 lbs.)



Oil spray, Hex wrench, Socket wrench, Dressing stone, Holster, Battery, Charger, DZ: Battery and Charger are sold separately

Adjustment of blade overlap when closed





by pressing and holding Blade opening angle adjustment button for 3 seconds or more when fully closed

High cutting performance



Work amount on a full battery charge

When cutting ø15mm branches of

about **2,200** pcs

Max cutting capacity

 $\emptyset 25$ mm

Lightweight





Average particle size

High spraying speed mode

50/150 um

Switch Interlocking Valve

The opening/closing operation of the solution supply valve is interlocked with the switch trigger to suppress dripping of solution.

Max spray distance: 14m



A variety of front covers

Diffusion cover

You can diffuse the mist by attaching the diffusion cover to the end nozzle

OUTDOOR POWER EQUIPMENT



Deflector set (Option)

You can discharge the mist upward or downward by attaching the deflector to the end nozzle





PM001GT202(PT2) / GZ01 Cordless Backpack Mist Blower

New

40Vmax XGT BL Cordless Backpack Mist Blower



Chemical tank capacity 15.0 L (507 oz) Max air volume High/Med./Low: 14.3/11.0/9.0 m³/min Max air velocity Hiah/Med./Low: 64.0/52.0/42.0 m/s Avg. air velocity High/Med /Low 53.0/43.0/34.0 m/s Vibration level 84.5 dB (A) ound power level 103.3 dB (A) Continuous Use (min.) w/BL4080F x2 High: 20 w/o Nozzle: 320 x 600 x 690 mm (LxWxH) (12-5/8 x 23-5/8 x 27-1/4") Net weight 13.2 - 15.7 kg

(29.1 - 34.6 lbs.)

Diffusion cover, Wrench, Nozzle, Battery, Charger, Z: Battery and Charger are sold separately

DUS158Z 15L Cordless Garden Sprayer

WetGuard; Excellent water-resistant performance



Li-ion Ab 6.0 5.0 3.0 1.5

Max Pressure Chemical tank 15 L Hose Length 1.7 m Continuous Use (min.) Y-shaped double nozzle: W/BL1830B: 120 Wide angle herbicide nozzle: W/BL1830B: 180 Dimensions 325 x 237 x 517 mm (LxWxH) (12-3/4 x 9-3/8 x 20-3/8") Net weight 4.6 kg (10.1 lbs.)

Upright Double-Headed Nozzle, Wide-Angle Herbicide Nozzle, Shoulder Harness, Holder, Measure cup, Battery, er. 7: Battery and Charger are sold separately

DUS108Z 10L Cordless Garden Sprayer





18V

Max Pressure 0.5 MPa Chemical tank Hose Length 1.7 m Continuous Use (min.) Y-shaped double nozzle: W/BL1830B: 120 Wide angle herbicide nozzle: W/BL1830B: 180 Dimensions 325 x 237 x 439 mm (LxWxH)(12-3/4 x 9-3/8 x 17-1/4") 4.6 kg (10.1 lbs.) Net weight

LXT XPT Upright Double-Headed Nozzle, Wide-Angle Herbicide Nozzle, Shoulder Harness, Holder, Measure cup, Battery, Charger, Z: Battery and Charger are sold separately

DUS054Z 5L Cordless Garden Sprayer

Two head nozzles for a wide range of spray



Li-ion Ah 6.0 5.0 3.0 1.5

Max Pressure 0.3 MPa (3 kgf/cm²) Chemical tank Hose Length 1.7 m Continuous Use (min.) Spray Single: w/ BL1860B: 530 min 340 x 183 x 360 mm Dimensions (LxWxH) (13-3/8 x 7-1/4 x 14-1/8") Net weight 2.1 kg (4.6 lbs.)

18V LXT XPT

Shoulder Harness, Holder, Battery, Charger, Z: Battery and Charger are sold separately

US053DZ 5L Cordless Garden Sprayer





0.3 MPa (3 kgf/cm²) Max Pressure Chemical tank 1.7 m Hose Length Spray Single: w/BL1041B Continuous Use (min.) :250 Dimensions 340 x 183 x 335 mm $(13-3/8 \times 7-1/4 \times 13-1/4")$ (LxWxH)



CXT XPT

Shoulder Harness, Holder, Battery, Charger, DZ: Battery and Charger are sold separately



OUTDOOR POWER EOUIPMENT

Trakita

0.3Mpa (3kaf/cm²)

315x225x415mm

(12-3/8"x8-7/8"x16-3/8") 3.8 - 4.1kg (8.4 - 9.1lbs)

DVF154Z 15L Cordless Garden Sprayer

Environmentally-friendly with no emission and extremely low noise



0.3Mpa (3kaf/cm²) Max pressure 345x235x525mm Dimensions (13-5/8"x9-1/4"x20-3/4") Net weiaht 4.1 - 4.5kg (9.1 - 9.7lbs)

DVF104Z 10L Cordless Garden Sprayer

Environmentally-friendly with no emission and extremely low noise

Max pressure Chemical tank

Dimensions

Net weight



Li-ion Ab 6.0 5.0 3.0 1.5

Y-shaped Double Nozzle, Wide Angle Nozzle, Spray Pipe Holder, Shoulder Harness, Z: Battery and Charger are sold separately

DG001GZ02 Cordless Earth Auger

Lightweight design for reduced operator fatigue

Li-ion at 8.0 5.0 4.0 2.5 2.0



Capacity Sandy Soil: 200 mm Clay Soil: 150 mm High/Low: No Load Speed (RPM) 0-1.500/0-400 High: 55 N·m (487 in.lbs.) Max Fastening Torque Low: 136 N·m (1,210 in.lbs.) 836 x 605 x 199 mm Dimensions (LxWxH) (33 x 23-3/4 x 7-7/8") Net weiaht 7.2 - 8.1 kg (15.9 - 17.9 lbs.)

DDG460ZX4 Cordless Earth Auger

Battery powered and powerful

Li-ion Ah 6.0 5.0 3.0 1.5



Capacity Sandy Soil: 200 mm Clay Soil: 150 mm High / Low: No Load Speed (RPM) 0-1.400/0-350 High: 48 N·m (430 in.lbs.) Max Fastening Torque Low: 136 N·m (1,210 in.lbs.) 2.5 m/s² or less Vibration Level Sound Pressure Level Sound Power Level 85 dB(A) Dimensions 840 x 607 x 223 mm (33 x 23-7/8 x 8-3/4") Net weiahi 7.3 - 8.2 kg (16.1 - 18.1 lbs.)







Chuck Key, Hex Wrench, Adapter, Battery, Charger, Z: Battery and Charger are sold separately





Chuck Key, Hex Wrench, Adapter, Battery, Charger, Z: Battery and Charger are sold separately





Reversing switch

enables to extract, in reverse rotation mode, an auger bit jammed in soil with high resistance like clay soil



Torque limiter

The torque limiter will actuate when a certain torque level is reached at the low speed setting. The motor will disengage from the output shaft. When this happens, the drill bit will stop turning.

Work amount depth 600mm / BL4040 / on full battery charge / low speed mode

ø150mm

about 100 holes ø200mm

about 65 holes





High power Brushless motor



HW001GZ Cordless High Pressure Washer

New

Powered by 40Vmax XGT Li-lon battery (two in parallel or one)



Max Pressure Max Flow Rate Pump Speed (RPM) Continuous use

(approx) on fully charged batteries Max Feed Temperature

High Pressure Hose Lenath Dimensions (L x W x H) Net weight

11.5 MPa 7.0 L/min Mode 1/Mode 2/Mode 3: 1,870/2,580/3,350 w BL4050F: Mode 1:60 min Mode 2: 30 min Mode 3: 18 min 40 °C

5 m (16 ft.) 344x383x520 mm 8.5 kg (18.7 lbs.)

40Vmax \ Q 3 A CO BL WG 1 Z: Battery and Charger are sold separately

DHW080ZK Cordless High Pressure Washer

18V X2 LXT BL Cordless 8 MPa High Pressure Washer 6.0 5.0 3.0 1.5



Max Pressure Max Flow Rate Pump Speed (RPM) Max Feed Temperature Max Suction Height Hiah Pressure Hose Length Sound Power Level Dimensions (L x W x H)

8.0 MPa (N/A bars) 380 L/h (6.3 L/min) High / Low: 3,450 / 2,390 40 °C (N/A °F) 1 m (3.3 ft.) 5 m (16 ft.) 70.9 dB(A)

438x218x269 mm (17-1/4"x8-5/8"x10-5/8") 7.1 - 7.7 kg Net weight (15.6 - 17.0 lbs.)







Trigger Gun, High Pressure Hose 5 m, Suction Hose, Cleaner Pin, Storage Box, Variable nozzle, Connector, One touch joint, Battery, Charger, Z: Battery and Charger are sold separately



Good mobility and transportability

Trakita



Large diameter wheels Equipped with ø140mm wheels, allowing for good mobility even on bumpy road surfaces.

Max permissible pressure 11.5 MPa



3 operation modes; operation mode can be selected to suit the contamination degree of the object to be cleaned.



Accessory storage

Side section: Trigger gun Rear section: High pressure hose, Foam nozzle, Lancev







Telescopic handle

for easy transportation and storage



Self-priming function





HW102 High Pressure Washer

Lightweight and compact power washer for home use



Continuous Rating Input 1,300W
Max Pressure 100bar (1,450 PSI)
Max Flow Rate 360 L/hr
Motor Type Universal
Sound Power Level 94dB(A)
Max Input Temperature 50°C
High Pressure Hose Length
Net Weight 5.8kg (5.0lbs)

HW1300 High Pressure Washer

High Pressure Washer with Self-Priming Function



Function

Continuous Rating Input 1,800W

Max Pressure 13MPa

Max Flow Rate 450 L/hr

Max Feed Temperature 450°C (104°F)

Sound Pressure Level 76 dB(A)

High Pressure Hose 10m

Length

Dimpositions 2022 559 220 pp (11)

 High Pressure Hose
 10m

 Length
 292x358x830 mm(11-(Lx Wx H)

 Net Weight
 12.7 kg (28.0 lbs.)

 Cord Length
 5m



Trigger Gun, Vario-Power Spray Lance, Cyclone jet nozzle, Detergent Bottle, Cleaner Pin, Coupling Sleeve, High Pressure Hose 10 m, Water Hose Connector, Foam Nozzle, Connector

HW132 High Pressure Washer





 Continuous rating input
 2,100W

 Max Pressure
 14 MPa

 (140 bar, 2,030 PSI)

 Net weight
 18.8 kg (41.4 lbs)

HW151 High Pressure Washer

Compact design, large operating range and efficient cleaning performance




Continuous Rating Input 2,500W
Max Pressure 15MPa (2,175 PSI)
Max Flow Rate 500 L/hr
Motor Type Induction
Sound Power Level 88dB(A)
Max Input Temperature 50°C
High Pressure Hose Length
Net Weight 26.9kg (23.3lbs)



Earth auger drill bit with adapter D shank



Suitable for drilling sandy soil and soil which contains grassroots and pebbles. Used for topdressing \cdot tree planting to fruit trees and also for drilling prepared hole which needs for hammering in various types of pile.

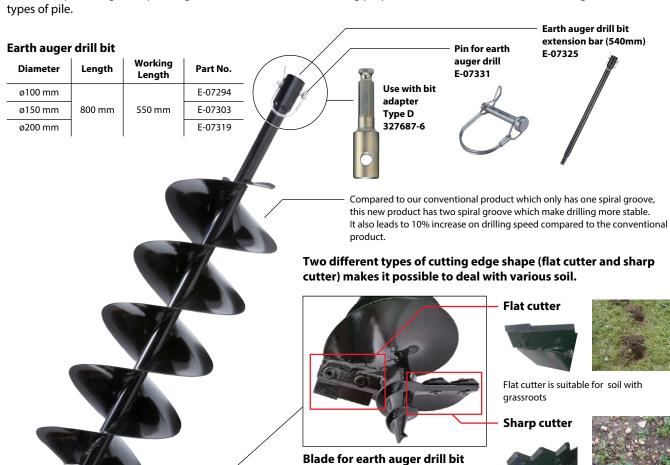

(Changing cutter blade set)

Part No.

E-07630

E-07646

E-07652

Sharp cutter is suitable for soil with

*Diameter 200mm is used only for sandy soil.

pebbles.

Diameter


For 100 mm

For 150 mm


For 200 mm

Tnakita.

Blade selection guide

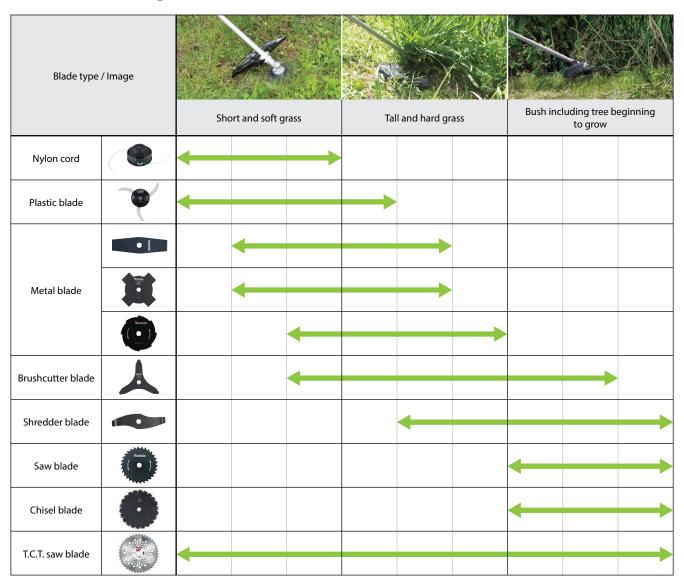







Shape	Application	Blade Dia. / No. of Teeth	Thickness	Model	Part No.
80-tooth blade					
Traktta	for bushes and thin tree trunks Not available in some countries due to local regulation	255mm / 80	2.0mm	EBH340U/R, EBH341L/U/R, EM3400U/L, EM4350UH/LH/RH, EM4351UH, RBC411U, RBC412U, RBC413U, RBC414U	B-14168
TCT Saw blade					
	for gnarled bushes and thin tree trunks Not available in some countries due to local regulation	230mm / 36	1.25mm	EBH252U, EBH253U, EBH340U/R, EBH341U/L, EBH341R, EM2500U/L, EM2510LH, EM2511LH, EM2600U/L, EM2650L/U, EM2651L/U, EM2653LH, EM2654LH, EM4340L	D-65981
		250mm / 40	1.25mm	EBH340U/R, EBH341L/U/R, EM2901LH/UH EM2904LH, EM3400U/L, EM4350UH/LH/RH, EM4351UH, RBC411U, RBC412U, RBC413U, RBC414U	A-48337
***************************************		255mm/4	2.0mm	EBH340U/R, EBH341L/U/R, EM4350UH/LH/RH, EM4351UH, RBC411U, RBC412U, RBC413U, RBC414U	B-14124

Edger blade



Blade Dia. / No. of Teeth	Thickness	Model No.	Part No.
203mm / 2	2.5mm	EE2650H, EE400MP	196745-7

Brushcutter blades

Hole Dia.: 25.4mm

Shape	Application	Blade Dia. / No. of Teeth	Thickness	Model	Part No.
2-tooth blade					
•	for tall grass and scrub	230mm / 2	2.0mm	EBH252U, EBH253U, EM2500U/L, EM2510LH, EM2511LH, EM2600U/L, EM2650LH/UH, EM2651LH/UH, EM2653LH, EM2653LH, EM4054LH, EM400MP, EM401MP, EM402MP, EM403MP, EM404MP	D-66058
4-tooth blade					
Smalle		230mm / 4	1.8mm	DUR361U, DUR362U, EBH252U, EBH253U, EM2500U/L, EM2510LH, EM2511LH, EM2600U/L EM2650LH/UH, EM2651LH/UH, EM2653LH, EM2654LH, EM400MP, EM401MP, EM402MP, EM403MP, EM404MP	B-14118
	for tall grass and scrub	230mm / 4	1.8mm	DUR365U, DUR368A/L, DUR369A/L, UR101C, UR201C, EM401MP, EM402MP	D-66008
		255mm / 4	2.0mm	EBH340U/R, EBH341L/U/R, EM4350UH/LH/RH, EM4351UH, RBC411U, RBC412U, RBC413U, RBC414U	B-14124
8-tooth blade					
Thakita	for thick grass and scrub	255mm / 8	2.0mm	EBH340U/R, EBH341L/U/R, EM3400U/L, EM4350UH/LH/RH, EM4351UH, RBC411U, RBC412U, RBC413U, RBC414U	B-14146

Trakita.

ACCESSORIES (OUTDOOR POWER EQUIPMENT)

Shape	Ref	Size	Thread Size	Model No.	Cord/Line	Package	Part No.
Quick loading Bump & Feed	l						
	96-M8L		M8x1.25LH	DUR142L, DUR142U, DUR143U, DUR182L, DUR182U, DUR183L, DUR183U, DUR187L, DUR187U, DUR188L, DUR188U	2.0mm x 4m	Carton box	191D91-7
	96-M8R		M8x1.25RH	DUR189, DUR364	2.0mm x 4m	Carton box	191D92-5
	96-M10L	4"	4"	DUR190L, DUR190U, DUR191L, DUR191U, DUR192L, UR201C, UR202C, DUR365, DUR366, DUR368A, DUR368L, DUR369A, DUR369L, DUR369N, EM408MP, EM409MP, UR001G, UR002G, UR003G, UR004G, UR101C	2.0mm x 4m	Carton box	191D89-4
	90-MIOL		M10x1.25LH	DUR369A, DUR369L, DUR369N, EBH252L, EBH252U, EBH253L, EBH253U, EM2510L, EM2511L, EM2650U, EM2651L, EM2651U, EM2653L, EM2654L, EM400MP, EM401MP, EM403MP, EM404MP, EM405MP, EM406MP, UR101C, UR201C, UR202C	2.4mm x 3m	Carton box	191D90-9
	21-M10L	5"	M10x1.25LH	EBH341L, EBH341U, EM4350L, EM4350R, EM4350U, EM4351U, MS335C , RBC411 , RBC412U, RBC413U, RBC414U	2.4mm x 4m	Carton box	191D93-3
Bump & Feed							
	76-M8R	3"	M8x1.25RH	UR100D	1.65mm x 8m	Poly bag with header	198853-0
		4"	M10x1.25LH	DUR190L, DUR190U, DUR191L, DUR191U, DUR192L, UR366L, DUR368A DUR368L, DUR369A, DUR369A, DUR369N, EBH252U/L, EBH253U/L, EM2510LH, EM2511LH, EM2650UH/LH, EM2651UH/LH, EM2654LH, UR002G, UR003G, UR101C, UR201C, UR202C EM400MP, EM401MP, EM403MP, EM404MP, EM405MP, EM409MP	2.0mm 3m	Poly bag with header	198892-0
	95-M10L				2.4mm x 3m	Poly bag with header	197804-0
Bump & Feed							
	B & F ECO 4R	4" Low profile	M8x1.25RH	DUR189, DUR364L		Poly bag with header	197297-1
	B & F ECO 4L	4" Low profile	M10x1.25LH	DUR192L, DUR366L, DUR368A, DUR368L, DUR369A, DUR369L, DUR369N, UR002G, UR003G, UR101C, UR201C, UR202C, EM408MP, EM409MP	2.0mm x 3m	Poly bag with header	197296-3
Automatic feed and Bump	B&F ZSL	5"	M10x1.25LH	EBH252U/L, EBH253U/L, EM2510LH, EM2511LH, EM2650UH/LH, EM2651UH/LH, EM2653L, EM2654L, EM3400U/L, EBH340U, EBH341U/L/R, EM4350UH/LH/RH, EM4351UH, RBC411U, RBC412U, RBC413U, RBC414U, EM400MP, EM401MP, EM403MP, EM404MP, EM405MP, EM406MP	2.4mm x 3m	Blister pack	B-05131
a.coane reca and bump t							
Line will be feeded about 3cm, in either one of the following cases -Head rotaitic		4"	M8x1.25RH	ER2550L, ER2650L, ER2600L, ER400MP	2.4mm x 3m	Carton box	B-03006
are reached at 8,500rpmBottom of th head is bumped on ground when spinning.		4"	M8&10x1.25 LH	DUR187U/L, DU188U/L, EM2500U/L, EM2600U/ L, EBH252U/L, EBH253U/L, EM2510LH, EM2511LH, EM2650UH/LH, EM2651UH/LH, EM2653LH, EM2654LH, EM400MP, EM401MP, EM403MP, EM404MP, EM405MP, EM406MP	2.4mm x 3m	Carton box	*B-02945

Tnakita

String trimmer head

(for grass, light weeds)
* with adapter (Poly bag with header)

Quick loading Trimmer Head (UN-74L, UN-72L, 96-M8L/R, 96-M10L, 121-M10L)

Nylon cord can be feeded without opening the head





Shape	Ref	Size	Thread Size	Model No.	Cord/Line	Package	Part No.
Quick loading Bump & Fee	ed						
	UN-74L	4.4"	M10x1.25L H	DUR190L, DUR366L, DUR368A, DUR368L, DUR369A, DUR369L, DUR369N, EBH252U/L, EBH253U/L, EBH341U, EM3400L, EM2510LH, EM2511LH, EM2650UH/LH, EM2651H, EM2654LH, UR002G, UR003G, UR101C, UR201C, UR202C, EM400MP, EM401MP, EM403MP, EM404MP, EM405MP, EM406MP	2.4mm x 3.6m	-	196324-1

Cordless string trimmer

Model No.	Spindle Size	Receive	Grass Guard for Receive	
Model No.		Size (mm)	Part No.	Washer
DUR184L	M8x1.25RH	36.5	326683-1 144512-4	346857-8
DUR187L	M10x1.25LH	36.5	144512-4	346857-8
DUR189	M8x1.25RH	36.5	144512-4	346857-8
DUR192L,DUR190	M10X1.25LH	36.5	140W47-1	346857-8

Model No.	Spindle	Receive	Grass Guard for Receive	
Model No.	Size	Size (mm)	Part No.	Washer
DUR364L	M8x1.25RH	44	319245-2	346857-8
DUR365U, DUR366L	M10x1.25LH	42	326518-6 140L84-9	346622-5
DUR368L	M8x1.25RH	-	140L84-9	-
DUR369L	M10X1.25LH	64.5	144312-2	-
UR202C	M10X1.25LH	65	140N88-3	-

Trakita.

Line character

Shape	Sharpness	Energy Saving	Quiteness
Four-leaf	А	AA	AA

Color chart

		Light duty		Heavy duty					
Dia.	Color / Shape		Short grass		Short grass Tall gr		grass		
		Low d	ensity	High o	density	Low d	ensity	High d	lensity
1.3mm	0	+							
1.6mm - 1.65mm	• •	+	→						
2.0mm	•		←	\rightarrow					
2.4mm	\Diamond \bigcirc \square		←			\rightarrow			
2.7mm	•				←			\rightarrow	
3.0mm	0 0 0					←			\rightarrow

Other Nylon cord (round, natural)



Size	Part No.
1.65mmx15m	DA0000003
2.4mmx5m	B-01971
3.0mmx4m	B-07375

Four-leaf Line Low noise and energy saving Four-leaf shape makes small vortex and realizes low noise and energy saving feature thanks to less air resistance.

ACCESSORIES (OUTDOOR POWER EQUIPMENT)



Color / Shape	Layer	Dia. (mm)	Length(m)	Part No.
	Single	1.65	15	E-01731
	Single	2	15	E-01769
	Single	2	30	197473-7 E-01775
	Single	2	310	E-01781
	Single	2.4	15	198501-1 E-01797
	Single	2.4	30	198502-9 E-01806
	Single	2.4	225	E-01812
	Single	2.7	15	E-01828
•	Single	2.7	30	E-01834
	Single	2.7	180	E-01840

Protection guard

Shape	Туре	Model No.	Description	Part No.
Protector				
	Universal	DUR369A , DUR369L, UR101C, UR201C	With protector extention	191B54-1
for Cutting blade				
	Exclusive	EBH340R		XNR0000302
for Trimmer head				
		UR100D	With cord/line cutter	135950-1
	Exclusive	DUR189	Without cord/line cutter	456651-1
EM405MP, EM4		EM405MP, EM406MP, UR101C, UR201C, UR202C, DUR369A, DUR369L, DUR369N	Narrow type / Without cord/line cutter	457273-0



Protection guard- Plastic blade set

Model No.		Plastic Blade Set			Replacement Plastic Blade	
		Arbore Size	Cutting Width	Part No.	Per Pkg.	Part No.
A C x5	UR100D	M8x1.25RH	230mm	198848-3	5	198850-6
x12	DUR369A, DUR369L, DUR369N, UR101C, UR201C, UR202C	M10x1.25LH	305mm	199868-0	12	199870-3

Spool assembly



Model No.	Part No.
UR3000	DA0000001
DUR181	195858-1
DUR193	191Y39-5

Shoulder strap assembly

shoulder strap assembly				
Shape	Model No.	Part No.		
Singlet	DUN500W DUN501W, DUR181, DUR184L, DUR187L, DUR188L, DUR189, DUR190L, DUR191L, DUR364L, DUR368A, DUR368L, UR100D, UR180D, DUR366L, DUX60L, EBH252L, EBH253L, EBH341L, EM2510LH, EM2511LH, EM2650LH, EM2651LH, EM2653LH, EM2654LH, EM3400L, EN4950H, EN4951SH, EY2650H, EX2650LH, RBC411U, RBC412U	125516-5		
Thakita	DUR192L, DUR194, UR002G, UR003G; UR006G, UR007G, DUR193, DUR194, UX18D	127508-0		
Comfort				
	DUR369A, EBH252U, EBH253U, EBH341U, EM2650UH, EM2651UH, EM4350UH, RBC411U, RBC412U, RBC413U, RBC414U, UR002G	122906-3		

Trakita.

ACCESSORIES (OUTDOOR POWER EQUIPMENT)

String trimmer harness for PDC01 & PDC1200



Attachments for loop handle brushcutter

Do not use following attachments with DUR369L, DUR369N, UR201C & UR202C.

Do not use following attachments with DUR369L, DUR369N, UR201C & UR202C.					
Shape	Model No.	Part No.			
Hedge trimmer Blade length: 490mm					
WALLES THE STREET	EM2650LH, EM2651LH, EM2653LH, EN2654LH	198579-4			
Pole saw Bar length: 25cm (10") Saw chain: 91VXL-39links Motor Mount:A218					
	EM2650LH, EM2651LH.	A-89539			
Coffee harvester					
- Te	EM2651LH	B-80210			

Attachments for back pack brushcutter

Do not use following attachments with DUR369L, DUR369N, UR201C & UR202C.

Do not use following attachments with Donsoys, Donsoys, Orzorc & Orzozc.				
Shape	Model No.	Part No.		
Coffee harvester				
- Ne	EBH340R, EBH341R	B-80226		
Coffee harvester				
	EBH340R, EBH341R	197163-2		



Multi-tool attachments



Blower

Shape	Model No.	Part No.
	Blower	7 Marie
	DUX18, DUX60, EX2650LH, UX01G	UB401MP 191P78-1


Tnakita



*Except for European, Austrarian, New zealand, Chinese & Korean markets.

Shape	Model No.	Part No.
Bar length: 25cm (10") (EY401MP), Saw chain: 91VXL-39links Motor Mount:A218	30cm (12") (EY403MP)	
	DUX18, DUX60, EX2650LH, UX01G	EY403MP 191T41-8

Pole hedge trimmer





DUX18, DUX60, EN420MP EX2650LH, UX01G 198061-3





DUX18, DUX60, EN424MP 1912V6-6 UX01G

Cultivator

Cultivating width: 160mm



DUX18, DUX60, KR400MP EX2650LH, UX01G 195712-9

Cultivator

Cultivating width: 220mm * Rotor LR set:

P/N:199204-0

DUX18, DUX60, KR401MP EX2650LH, UX01G 195716-1



Power sweep

* Sweeper wheel (1pc):



DUX18, DUX60, SW400MP EX2650LH, UX01G 199344-4

Coffee harvester



Edger attachment



Pump attachment

DUX18, DUX60,

UX01G

Shaft extension attachment

S For Pole saw, Pole hedge trimmer and Coffee harvester



LE400MP EX2650LH, UX01G 191E23-0

PF400MP

A-75384



Makita

Saw Chain and Guide Bar -



A Guide Bar Length

Guide bar's length is represented by cutting length, which is different from its whole length.



B Drive Link

The length of saw chain is determined by counting the number of drive links in the saw chain.




C Chain Pitch

Chain pitch is the size of the chain and it is defined by the distance between any three consecutive rivets divided by two. Pitch is important because the drive sprocket must be the same pitch as the chain.



D Gauge

Chain Gauge is thickness of drive link which will fit into the guide bar groove. Chain gauge must be the same as guide bar gauge.



E Depth Gauge

Depth gauge determines how deep the cutting teeth gets into the wood. Cutting depth can be checked by the gap between top of cutter and depth gauge.



General Saw Chain Character

ACCESSORIES (OUTDOOR POWER EQUIPMENT)

D Gauge		Fast	Cuttin	g speed	Slow
C Chain Pite	ch	.043" (1.1mm)	.050" (1.3mm)	.058" (1.5mm)	.063" (1.6mm)
♦	1/4"		25AP		
Fine	.325"LP	80TXL			
Surface	3/8"LP	90PX	91PX 91VXL		
condition	.325"		20BPX 95VPX	21BPX 21LPX	22LPX
	3/8"		72V	73DPX 73LGX 73LPX	
Coarse	.404"				27X

Guide Bar Type -

Sprocket Nose Bars

Sprocket nose bars have a rotating sprocket mounted at the tip of the bar. As the chain moves along the bar, the sprocket teeth carry the chain around the tip smoothly with less friction.




High durability sprocket nose bar

Longer nose life thanks to larger nose sprocket than norrmal sprocket bars. Multiple rivets can be found on bar surface.



Solid Carving Bars

Carving bars are made of high-quality steel and high wear resistant stellite has been welded onto the tip. Bar tip is designed to have small radius for precision cutting. The carving bars are made for especially pruning and carving.



Guide Bar Maintenance

Chain Tension

Check the chain tension before use. The saw chain may become loose after many hours of use.



File Bar Edge

File bar edge with a flat file to keep it 90° once a week.



Clean Guide Bar

Clean out chips and sawdust every time when you sharpen or replace saw chain.



Bar Nose Grease

Lubricate a whole sprocket regularly so that the saw chain can rotate with less friction.



Trakita.

Chain Saws

Guide Bar / Saw Chain / Guide Bar Cover / Drive sprocket Cutter type: CC: Chamfer chisel, SC: Semi chisel, MC: Micro chisel, FC: Full chisel * Pole saw attachment (196315-2) **without package

			Tnakita.							>	Thakita.						
		Guid	de Bar					9	Saw Chai	n	Bar Cover	Drive s	procket				
Model No.	Bar length	Motor Mount	Туре	Part No.	No. of drive links	Gauge	Pitch	Type OREGON	Cutter type	Part No. (Carton)	Part No.	Туре	Part No.				
Pole Saws																	
EY401MP	25cm/10"	A218	Sprocket nose bar	191G11-9	39	1.3mm/ .050"	3/8'' LP	91VXL	SC	191H20-4	452093-7 / 458501-6	3/8"LP	XTM0000014				
EY402MP	25cm/10"	A041	nose bai	191G14-3	40	1.1mm/	LF			191H00-0	452093-7 / 458501-6						
EY403MP	30cm/12"	A041	C	191G15-1	46	.043''	3/8''	90PX	CC	191H01-8	419288-5 / 413G23-5						
DUA250, DUA251 DUA300, DUA301	25cm/10"	A041	Sprocket nose bar	191G22-4	40	1.3mm/	LP			191H08-4	452093-7 / 458501-6	3/8"LP	226992-7				
UA001G, UA002G UA003G, UA004G	30cm/12"	A041		191G23-2	46	.050''		91PX	CC	191H10-7	419288-5 / 413G23-5						
Cordless Chain S	aws																
DUC101	10cm/4"		without	1910W0-3	26	1.1mm/	.325"	80TXL	MC	1910V6-4	413M40-1	.325"LP	227947-5				
UC100D			sprocket			.043"	LP					10-10-10-10-10-10-10-10-10-10-10-10-10-1					
DUC121, DUC122	11.5cm/ 4-1/2"		without sprocket	158476-6	42	1.3mm/ .050''	1/4''	25AP	MC	191G95-7	416311-7	1/4"	221527-9				
	25cm/10"		Solid carving bar	1911A1-3	60	1.3mm/ .050"	1/4''	25AP	MC	191G96-5	452093-7 / 458501-6	1/4"	198259-2				
	25cm/10"	A041	Sprocket	191T85-8	46	1.1mm/	.325"	80TXL	MC	191T89-0	452093-7 / 458501-6	.325"LP	1911W6-9				
DUC204	30cm/12"	A041	nose bar	191T86-6	51	.043''	LP	OUTAL	IVIC	191T90-5	419288-5 / 413G23-5	.525 Ei	15111105				
DUC254 DUC254C	20cm/8"	A041	Sprocket	191G13-5	33	1.1mm/	3/8''	OODV	cc	191G99-9	458503-2 452093-7 / 458501-6						
	25cm/10" 30cm/12"	A041 A041	nose bar	191G14-3 191G15-1	40 46	.043''	LP	90PX	CC	191H00-0 191H01-8	419288-5 / 413G23-5	C					
	25cm/10"	A041	Constant	191G22-4	40	1.3mm/	3/8''			191H08-4	452093-7 / 458501-6	Sprocket 3/8"LP	199063-2				
			Sprocket nose bar			.050"	LP	91PX	CC		,						
	30cm/12"	A041	Solid	191G23-2	46	1.3mm/	1 (41)	2540	146	191H10-7	419288-5 / 413G23-5	Sprocket	221520.7				
	25cm/10"	-	carving bar	1911A1-3	60	.050''	1/4''	25AP	MC	191G96-5	452093-7 / 458501-6	1/4"	221528-7				
DUC252	25cm/10"	A041	Sprocket	191G14-3	40	1.1mm/	3/8''			191H00-0	452093-7 / 458501-6						
DUC302 DUC352	30cm/12"	A041	nose bar	191G15-1	46	.043''	LP	90PX C	CC	191H01-8 191H02-6	419288-5 / 413G23-5						
DUC352 DUC252C	35cm/14" 25cm/10"	A041 A041		191G16-9 191G22-4	52 40					191H02-6	419288-5 / 413G23-5 452093-7 / 458501-6	Sprocket 3/8"LP	221526-1				
	30cm/12"	A041	Sprocket	191G23-2	46	1.3mm/	3/8''	91PX	CC	191H10-7	419288-5 / 413G23-5						
	35cm/14"	A041	nose bar	191G24-0	52	.050''	LP			191H11-5	419288-5 / 413G23-5						
	25cm/10"		Solid carving bar	191G61-4	60	1.3mm/ .050''	1/4''	25AP	MC	191G96-5	452093-7 / 458501-6	Sprocket 1/4"	198259-2				
	25cm/10"	A041	cui viiig bui	191T85-8	46	.030				191T89-0	452093-7 / 458501-6	Δ, .					
	30cm/12"	A041	Sprocket	191T86-6	51	1.1mm/ .043''	.325" LP	80TXL	MC	191T90-5	419288-5 / 413G23-5	Sprocket .325"LP	1911W6-9				
	35cm/14"	A041	nose bar	191T87-4	59	.043	LP			191T91-3	419288-5 / 413G23-5	.525 LP					
DUC256	25cm/10"	A041		191G14-3	40					191H00-0	452093-7 / 458501-6						
DUC306 DUC356	30cm/12"	A041	Sprocket	191G15-1	46	1.1mm/	3/8''	90PX	CC	191H01-8	419288-5 / 413G23-5						
DUC406	35cm/14"	A041	nose bar	191G16-9	52	.043''	LP			191H02-6	419288-5 / 413G23-5						
DUC256C	40cm/16"	A041		191G17-7	56					191H03-4	419242-9 / 413G21-9	Sprocket 3/8"LP	199063-2				
	25cm/10" 30cm/12"	A041 A041	Sprocket	191G22-4 191G23-2	40 46	1 2mm/	3/8''			191H08-4 191H10-7	452093-7 / 458501-6 419288-5 / 413G23-5	3,0 1					
	35cm/14"	A041	nose bar	191G24-0	52	1.3mm/ .050''	LP	91PX	CC	191H11-5	419288-5 / 413G23-5						
	40cm/16"	A041		191G25-8	56					191H12-3	419242-9 / 413G21-9						
	30cm/12"	A041		191G15-1	46					191H01-8	419288-5 / 413G23-5						
	35cm/14"	A041	Sprocket nose bar	191G16-9	52	1.1mm/ .043''	3/8'' LP	90PX	CC	191H02-6	419288-5 / 413G23-5						
DUC307 DUC357	40cm/16"	A041	nose bai	191G17-7	56	.0-13	Li .			191H03-4	419242-9 / 413G21-9	Sprocket	199063-2				
DUC407	30cm/12"	A041	Sprocket	191G23-2	46	1.3mm/	3/8''			191H10-7	419288-5 / 413G23-5	3/8"LP	155005 2				
	35cm/14"	A041	nose bar	191G24-0	52	.050''	LP	91PX	CC	191H11-5	419288-5 / 413G23-5						
	40cm/16"	A041	Solid	191G25-8	56	1.3mm/				191H12-3	419242-9 / 413G21-9	Sprocket					
	25cm/10"	_	carving bar	1911A1-3	60	.050"	1/4''	25AP	MC	191G96-5	452093-7 / 458501-6	1/4"	198259-2				
	30cm/12"	A041	Sprocket	191T86-6	51	1.1mm/	1mm/ .325"	NAC	191T90-5 191T91-3	419288-5 / 413G23-5	Sprocket	101114/6.0					
DUC303 DUC353	35cm/14" 40cm/16"	A041 A041	nose bar	191T87-4 191T88-2	59 64	.043''	LP	80TXL	MC	191191-3 191T92-1	419288-5 / 413G23-5 419242-9 / 413G21-9	.325"LP	1911W6-9				
DUC400	30cm/12"	A041		191G15-1	46					191H01-8	419288-5 / 413G23-5						
DUC305 DUC355	35cm/14"	A041	Sprocket	191G16-9	52	1.1mm/	3/8'' LP	90PX	CC	191H02-6	419288-5 / 413G23-5	5 9 Sprocket	Sprocket 10				
DUC405	40cm/16"	A041	nose bar	191G17-7	56	.043''	LP			191H03-4	419242-9 / 413G21-9			199063-2			
	30cm/12"	A041	Sprocket	191G23-2	46	1.3mm/	3/8''				419288-5 / 413G23-5	3/8"LP	3/8"LP				
	35cm/14"	A041	nose bar	191G24-0	52	.050"	LP	91PX	CC	191H11-5	419288-5 / 413G23-5						
	40cm/16"	A041		191G25-8	56					191H12-3	419242-9 / 413G21-9						

Trakita.

ACCESSORIES (OUTDOOR POWER EQUIPMENT)

		Guid	de Bar						Saw Chai	n	Bar Cover	Drive s	procket
Model No.	Bar length	Motor Mount	Туре	Part No.	No. of drive links	Gauge	Pitch	Type OREGON	Cutter type	Part No. (Carton)	Part No.	Туре	Part No.
	25cm/10"		Solid carving bar	1911A1-3	60	1.3mm/ .050''	1/4"	25AP	MC	191G96-5	452093-7 / 458501-6	Sprocket 1/4"	191V92-3
	25cm/10"	A041		191T85-8	46					191T89-0	452093-7 / 458501-6		
	30cm/12"	A041	Sprocket nose bar	191T86-6	51	1.1mm/ .043''	.325" LP	80TXL	MC	191T90-5	419288-5 / 413G23-5	Sprocket .325"LP	191V91-5
UC002G	35cm/14"	A041		191T87-4	59					191T91-3	419288-5 / 413G23-5		
UC003G UC004G	25cm/10"	A041		191G14-3	40					191H00-0	452093-7 / 458501-6		
UC006G UC007G	30cm/12"	A041	Sprocket nose bar	191G15-1	46	1.1mm/ .043''	3/8" LP	90PX	CC	191H01-8	419288-5 / 413G23-5		
0C007G	35cm/14"	A041		191G16-9	52					191H02-6	419288-5 / 413G23-5	Sprocket	191V90-7
	25cm/10"	A041		191G22-4	40					191H08-4	452093-7 / 458501-6	3/8"LP	191090-7
	30cm/12"	A041	Sprocket nose bar	191G23-2	46	1.3mm/ .050''	3/8" LP	91PX	CC	191H10-7	419288-5 / 413G23-5		
	35cm/14"	A041		191G24-0	52					191H11-5	419288-5 / 413G23-5		
	30cm/12"	A041		191T86-6	51					191T90-5	419288-5 / 413G23-5	Sprocket .325"LP	
UC010G UC011G	35cm/14"	A041	Sprocket	191T87-4	59	1.1mm/	.325"			191T91-3	419288-5 / 413G23-5		
	40cm/16"	A041	nose bar	191T88-2	64	.043''	LP	80TXL	MC	191T92-1	419242-9 / 413G21-9		191V91-5
	45cm/18"	A041		191X03-0	70					191X04-8	419242-9 / 413G21-9		
UC012G UC013G	30cm/12"	A041	Sprocket nose bar	191G15-1	46	1.1mm/ .043''	3/8" LP	90PX		191H01-8	419288-5 / 413G23-5		
UC014G	35cm/14"	A041		191G16-9	52				CC	191H02-6	419288-5 / 413G23-5		
UC015G UC016G	40cm/16"	A041	nose su	191G17-7	56	.0.13				191H03-4	419242-9 / 413G21-9		
UC017G	30cm/12"	A041		191G23-2	46					191H10-7	419288-5 / 413G23-5	Sprocket 3/8"LP	191V90-7
UC020G	35cm/14"	A041	Sprocket	191G24-0	52	1.3mm/	3/8"	91PX	CC	191H11-5	419288-5 / 413G23-5	3/8 LP	
	40cm/16"	A041	nose bar	191G25-8	56	.050''	LP	91PX	CC	191H12-3	419242-9 / 413G21-9		
	45cm/18"	A041		191G26-6	62					191H13-1	419242-9 / 413G21-9		
Electric Chain Sa	iws												
	30cm/12"	A041		191G15-1	46					191H01-8	419288-5 / 413G23-5		
	35cm/14"	A041	Sprocket nose bar	191G16-9	52	1.1mm/ .043''	3/8" LP	90PX	CC	191H02-6	419288-5 / 413G23-5		
UC3041A, UC3541A,	40cm/16"	A041		191G17-7	56					191H03-4	419242-9 / 413G21-9	Sprocket	221526 1
UC4041A	30cm/12"	A041		191G23-2	46					191H10-7	419288-5 / 413G23-5	3/8"LP	221526-1
	35cm/14"	A041	Sprocket nose bar	191G24-0	52	1.3mm/ .050''	3/8" LP	91PX	CC	191H11-5	419288-5 / 413G23-5		
	40cm/16"	A041		191G25-8	56					191H12-3	419242-9 / 413G21-9		
	30cm/12"	A041		191G23-2	46					191H10-7	419288-5 / 413G23-5		
UC3050A, UC3550A, UC4050A, UC4550A,	35cm/14"	A041	Sprocket	191G24-0	52	1.3mm/	3/8"	04.504		191H11-5	419288-5 / 413G23-5	Sprocket	224 504 5
UC3051A, UC3551A,	40cm/16"	A041	nose bar	191G25-8	56	.050''	LP	91PX	CC	191H12-3	419242-9 / 413G21-9	3/8"LP	221521-1
UC4051A, UC4551A	45 /10"	A O 41		101636.6	C 2					1011112 1	410242 0 / 412621 0		

Petrol Chain Saws

45cm/18" A041

retroi Chain Saws												
	Guide Bar			Saw Chain				Bar Cover	File diameter,	File diameter		
For Models	Bar length	Part No.	No.of drive links	gauge	pitch	Cutte	er type	Saw Chain Part No.	Part No.	1st half of top plate	2nd half of top plate	Туре
EA6100, EA7900,	50cm/20"	-	72				528	528 099 672	-			
DCS6400, DCS6401, DCS6400H, DCS7300, DCS7300H, DCS7301,	60cm/24"	-	84	1.5mm/0.058" 3/8" 73LP	528 099 684	-	5.5mm	4.0	-			
DCS7900, DCS7900H, DCS7901, PS7300, PS7900	60cm/24"	-	84		3/0	/3LF		528 099 684	-	5.511111	4.8mm	Solid
137300	70cm/28"	-	94				SC	-	-			-
DCS9000, DCS9010, PS9010	76cm/30"	443 076 422	92	1.5mm/0.058"	3/8"	73LP	FC	528 099 696	-	5.5mm	4.8mm	-
EA4301F	45cm/18"	445 045 655	72	1.3mm/0.050"	0.325"	95VP	SC	512 484 772	-	-	-	-
DCS6000I, DCS6400, DCS6401, PS6400	50cm/20"	-	72	1.5mm/0.058"	3/8"	73LP	FC	528 099 672	-	-	-	-
DCS520, DCS6000I, 111	53cm/21"	445 053 451 443 053 651	72	1.5mm/0.058"	3/8"	73LP	FC	528 099 672	-	-	-	Solid Sprocket

Solid carving bar

Saw Chain: 25AP-60 links Part No. 191G96-5



191G26-6

Drive sprocket: 1/4" 9T

Model No.
DUC204, DUC254, DUC254C, DUC303, DUC353, DUC400, DUC305, DUC355, DUC405
DUC256, DUC306, DUC356, DUC406, DUC256C: 198259-2
DUC252, DUC302, DUC352, DUC252C: 221528-7
UC002G, UC003G, UC004G, UC006G, UC007G: 191V92-3





191H13-1 419242-9 / 413G21-9



Bar nut

* Pole saw attachment (196315-2)

Model No.	Thread Size	Wrench Size	Part No.
EA4300F, EA5001P, EA5000P, EA6100P, EA6101P, EA7300P, EA7301P, EA7900P, EA7901P	Single	2	252145-2

Round File, File holder



Saw Chain Type	Size	Round	File	File and File Handle and File Holder
		Part No.	Q'ty	Part No.
		*744003-1	1	-
25F, 25AP, 91P, 91PX, 91PXL, 91VXL, M91VXL, 466, 492, 196	4mm	953003090	1	953030010
		D-67365	12	D-70948
		953003100	1	195923-6
90PX, 90SG, 291	4.5mm	-	-	D-70954
		-	-	D 70354
95VPX, 95TXL, 20BPX, 21BPX,	4.8mm	953003070	1	-
22BPX, 20LPX, 21LPX, 22LPX, 082, 086, 686, 484		-	-	
002, 000, 000, 404		-	-	D-70960
72DPX, 73DPX, 75DPX, 72LPX, 73LPX, 75LPX	5.2mm	D-67424	12	D-70976
72V, 73V, 75V, 72APX, 72DPX, 73DPX, 75DPX, 72EXL, 73EXL,		953003040	1	-
75DPA, 75DPA, 72EXL, 73EXL, 75EXL, 72EXJ, 73EXJ, 75EXJ, 72LGX, 73LGX, 75LGX, 72JGX, 73JGX, 75JGX, 72JPX, 73JPX, 75JPX, 72LPX, 73LPX, 75LPX, 72RD, 73RD, 75RD, 496, 093, 099	5.5mm		-	D-70982

Pruning extension set



Holster For DUC101 & UC100D



Model No.	Part No.
DUC101, UC100D	1911R0-4

Flat File, Depth gauge



Flat fi	le	Depth Gauge	Flat File and File Handle and Depth Gauge
Part No.	Q'ty	Part No.	Part No.
953003060	1	953003060	-
-	-	-	D-70998

File set for in Roll Up Pouch





For all saw chain

Description	Part No.
φ4.0mm Round File(3pcs) / File Holder / Flat File / Handle(2pcs) / Depth Gauge	D-72154
φ4.8mm Round File(3pcs) / File Holder / Flat File / Handle(2pcs) / Depth Gauge	D-72176
φ5.2mm Round File(3pcs) / File Holder / Flat File / Handle(2pcs) / Depth Gauge	D-72182
φ5.5mm Round File(3pcs) / File Holder / Flat File / Handle(2pcs) / Depth Gauge	D-72198

Chain oil

	Description	Size	Part No.
Chain Oil	With Makita chain oil, chain oiling is formulated to adhere to the bar and chain and to reduce wear. Adhesion additive helps keep sap and pitch from clinging to the bar and chain. (Not available in Austria)	100ml	199897-3
BIOTOP Chain oil	With BIOTOP, chain oiling is safe for environment. BIOTOP is purely vegetablebased and readily biodegradable. It meets the strict requirements of the RAL UZ48 environment mark for environmental compatibility, lubrication, and aging resistance.	1L	1910U0-9

Trakita.

Hook holder for extension cord



Model No.	Description	Part No.
В	Cord holder complete set	194677-2
С	Hook complete	158024-1

Shear blade & Blade cover for Grass Shear









Model No.	Cutting Width	Blade Assembly	Blade cover	Grass Receiver
DUM111, DUM110	110mm	191N23-4	413885-9	454880-0
DUM168, DUM604, UM600D, UM603D	160mm	195267-4	452055-5	457426-1

Conversion from Hedge Trimmer to Grass Shear













Model No.	Cutting Width	Blade assembly
UH201D	160mm	195267-4

Grass Receiver





*with grass Shear blade


Model No.	Part No.
DUM604, UM600D, UM603D, *UH201D	457426-1

Blade type


A: Curving blade

Optimum blade shape for smooth cutting

ACCESSORIES (OUTDOOR POWER EQUIPMENT)







B: High grade blade

Upper/Lower blade teeth with 3

sharpened edges for clean cut.



Blade teeth with 3 sharpened edges Well sharpened edges provide clean cut with the least branch damage.



C: Stain-free blade

Non-electrolyzed nickel plating

Evenly and strongly adhered surface coating that features high anti-abrasion surface for long lasting coating.



Sap on the blade

(after 10 hour trimming of Boxwood)







Model No	Blade Assembly		Blade Cover
Model No.	Blade Type	Part No.	Part No.

Cordless Hedge Trimmer *for China, Hong Kong, Korea, Malaysia, Philippines, Singapore, Taiwan & Vietnam.

**for Canada & Mexico			
UH201D	С	EU:198408-1	458342-0
DUH551	C	196687-5	450489-6
DUH651	С	196688-3	450490-1
DUH506	С	1910H8-2	-
DUH606	С	1910H9-0	-
DUH507	С	1911J1-6	-
DUH521, DUH523U, UH520D, UH522D	С	195769-0	-
DUH501	Α	-	458413-3
DUH601	Α	199099-1	458414-1 *459121-9
DUH751	Α	199100-2	458415-9
DUH604S	В	191D38-1	-
DUH754S	В	191D39-9	-
DUH502	В	199598-3	459120-1
UH005G	Α	191R54-7	-
UH006G	Α	191R55-5	-
UH007G	Α	191R56-3	-
UH008G	В	191R57-1	-
UH009G	В	191R58-9	-
UH014G	В	191Y05-2	-



Model No.	Blade Assembly		Blade Cover
	Blade Type	Part No.	Part No.

Pole Hedge Trimmer (Cordless, Petrol, Multi-tool attachments)

*with Blade guard

**without Blade guard

=			
DUN461W, UN460WD	Α	191P00-8	-
DUN500W	Α	191C14-9	458413-3
DUN600L	Α	191C13-1	-
EN420MP	В	198195-2	-
EN401MP, EN410MP, EN4950H, EN4951SH	В	EU:197768-8	-

AC Hedge Trimmer

UH5580	С	194671-4	-

Petrol Hedge Trimmer *for blade without end cover

^{**}for blade with end cover

EH5000W	В	123709-8	-
			-
EH7500W	В		-
		125857-9	-
EH6000S	В		-
EH7500S	В	125773-5	-

Chip receiver assembly set

Keeps branch or leaf debris from scattering around.

Attachable to either side of the blade





Model No.	Description	Part No.
DUH202, *DUM111, *DUM604, UH201D, *UM110D, *UM600D, *UM603D	One-touch installation removal	198401-5
DUH501, DUH502, DUH601, DUH602, DUH751, DUH752	One-touch installation/removal	199151-5
DUH604S	-	191D33-1
DUH754S	-	191D34-9
UH004G, UH006G, UH008G	-	191R51-3
UH005G, UH007G, UH009G	-	191R52-1

Toothed edge 4

designed like saw teeth can catch and prevent leaf or twig debris from falling over the edge of chip receiver.





on the bottom plate prevents leaf or twig debris from sliding and slipping out of chip receiver.

Model No.	Description	Content	Part No.
EH7500S, EN7350S	without blade guard	With binding head screw M5X12 x5pcs	196777-4
EH7500S, EN7350S	with blade guard	With binding head screw M5 x 12 x 5pcs.	195321-4

Conversion from Grass Shear to Hedge Trimmer









*With clank cover

Model No.	Blade Assembly	Blade Cover	Chip Receiver
Model No.	Part No.	Part No.	Part No.
DUM604, UM600D, UM603D	198408-1	*195274-7	198401-5
DUM110, DUM111	191N24-2	458342-0	198401-5
DOMITIO, DOMITI	191N24-2	*195274-7	198401-5

Blade guard



Model No.	Part No.
Cordless Hedge Trimmer	
DUH501, DUH502, DUH601, DUH602, DUH751, DUH752	458408-6



*with grass shear blade

Model No.	Part No.
DUM604, *DUH202, UM110D, DUM111, UM600D, UM603D, *UH201D	EU:198486-1

Trakita.

Pruning Shear blade

Shear blade (U)





Stop Ring E-4

- *With Stop Ring E-4 (P/N:961011-9)
 **Hex socket button head screw M3x6 P/N:266183-8
- & Shoulder bolt M8
- P/N:251573-8 are also necessary.

Model No.	T	*ShearBlade (U)	Shear Blade (L)
Model No.	Type	Part No.	Part No.
	Standard	EU: 197588-0*	EU: 197367-6
DUP361 DUP362	For hard branch	-	199169-6
	For thin branch	199314-3**	-

Branch catcher set


*with Shear blades for thin branch





Model No.	Part No.
*DUP361, *DUP362	199311-9

Diamond file for shear blade



Model No.	Part No.
DUP361, DUP362	794530-8

Wheelbarrow attachment







Bucket set		
DCU180	DCU603	DCU605
Politic	Makita	Makita
	One	



Model No.	Туре	Part No.
	Carrier set (Pipe deck)	199116-7
DCU180	Bucket set	198494-2
	Auxiliary wheel attachment set	191A01-6

Wheelbarrow attachment

ACCESSORIES (OUTDOOR POWER EQUIPMENT)

Model No.	Туре	Part No.
DCU603	Dump Bucket 200 Set	191B69-8
DCU604	Carrier Set	191B67-2
DCU605	Flat Bucket Set	1911B3-6
DCU603, DCU604	Dump Unit Set	191B63-0

Tire for Wheelbarrow





Model No.	Туре	Part No.
DCU603,	Tire 330 (Single) Set	1911K4-7
DCU604,	Gray Tire 330 (Single) Set	1911K5-5
DCU605	Gray Tire 210 (Single) Set	1911K6-3

Rotary lawn mower blade



Model No.	Size (mm)	Part No.
Cordless Lawn Mower		
DLM382	380	191D41-2
DLM432	430	191D43-8
DLM462, DLM465	460	191D51-9
DLM530, DLM531, DLM532, DLM536, DLM537, LM001C	530	191D52-7
Electric Lawn Mower		
ELM3320	330	YA00000745
ELM3720	370	YA00000746
ELM4121	410	YA00000738
ELM4620	460	YA00000741
ELM4621	460	YA00000741
Petrol Lawn Mower		
PLM4120N	410	671001433

Rotary lawn mower swing back blade



Model No.	Swing Back Blade Set		Replacement Blade Set	
Model No.	Size (mm)	Part No.	Size (mm)	Part No.
DLM462, DLM465	460	191D49-6	4	191D47-0
DLM530, DLM531, DLM532, DLM533, DLM535, DLM536 DLM537, LM001C	530	191D50-1	4	191D48-8

Tnakita.

Mulching plug set



Model No.	Part No.
DLM382 DLM432	191D46-2

Vacuum Attachment



Model No.	Description	Part No.
DUB363	Vacuum kit set	191E19-1
BHX2500, BHX2501	Vacuum set	195282-8

Pipe, End pipe, Flat nozzle & others accessory

- *Adapter pipe 71 set are also necessary.

 **Adapter pipe 80-72 set are also necessary.

 ***Adapter pipe 85-72 set are also necessary.

 ****Adapter pipe set MG set are also necessary.

Model No.	Items		Part No.
DUB184** DUB362 DUB363	Extension Nozzle	13	197888-8
UB001C*** UB001G*** UB400MP***	Flat nozzle		197889-6
DUB184** DUB362* DUB363 UB001C*** UB001G*** UB400MP**** UB401MP****	Gutter nozzle set (2.9m)	S	191B03-8
DUB362	Adapter pipe 71 set	and the same of th	191J13-3
DUB184	Adapter pipe 80-72 set	A STATE OF THE STA	191L13-5
UB001C UB001G	Adapter pipe 85-72 set		191L96-5
UB400MP UB401MP	Adapter pipe set MG	THE REAL PROPERTY.	191C15-7
UB001G DUB184 DUB362	Shoulder belt	>	166094-6





Model No.	Items	Part No.
	Long pipe 90 set	197723-0
EB5300TH, EB5300WH,	Short pipe 90 set	196912-4
EB7660TH, EB7660WH	End nozzle 90-62	198034-6
	Flat nozzle	196911-6
PM7650H, PM7651H	Top adapter	453986-1

Nozzle assembly

A: Standard equipment



Model No.	Size (mm)	Туре	Part No.
DUB182	220	Α	132025-7
UB100D, UB101D,	220	Α	123245-4
DUB185, DUB186	430	-	123246-2

Tapered Nozzle

A: Standard equipment



Model No.	Color	Part No.
UB100D, UB101D, DUB185, DUB186	Gray	192236-6

Bending long nozzle set

* long nozzle



Model No.	Part No.
DUB183/DUB182	TP00000199
UB100D, UB101D, DUB185, DUB186	191G09-6

Dust Bag



Model No.	Part No.
UB100D, UB101D, DUB185, DUB186	123241-2
	1232 11 2

Flexible hose set

(Total length: 95cm)



Model No.	Part No.
DUB185, DUB186, UB100D, UB101D	196643-5

Tnakita.

Sprayer accessories for EF1550RH & EVH2000

Shape	Model No.	Features/ Recommended use	Part No.
Wide angle herbicide nozzle		for spraying herbicides; also ideal for watering plants or spraying soil conditioner	6908031000
Herbicide nozzle		Hard to become mist preventing diffusion of medicine.	6958011000
Y-shaped double nozzle		for general pesticide applications using insecticides, fungicides, etc.	6958025000
Long two head nozzle	EF1550RH EVH2000	Wide spraying with wide angle outlet.	6949001000
U-shaped double nozzle		Wide spraying with wide angle outlet.	6958018000
Triple concentric nozzle		Spraying in the form of circular.	6909500100
Quadruple concentric nozzle		Spraying in the form of circular.	6919500000
Compact nozzle		Convenient for spraying in the green house by compact nozzle.	6939025000
Jet nozzle 2	EVH2000	Diffusion or straight is selectable with one tach	6939024000
Super jet nozzle		Diffusion or straight is selectable.	6939028000

Shape	Model No.	P	art No.
Rotating brush set	DHW080, HW1200 HW1300, HW001G	19	97831-7
Wash brush set	DHW080, HW1200 HW1300, HW001G	19	97828-6
Foam nozzle set	DHW080, HW1200 HW1300, HW001G	197886-2	
Pipe cleaning hose	DHW080, HW1200	10m	197837-5
	HW1300, HW001G	15m	197840-6
High pressure extension hose	Dillatono illatano	5m	197845-6
	DHW080, HW1200 HW1300, HW001G	8m	197847-2
		10m	197850-3
Twist prevention joint set	DHW080, HW1200 HW1300, HW001G	197867-6	
Self-suction hose set	DHW080, HW1200 HW1300, HW001G	197873-1	
Accessory joint set	DHW080, HW1200 HW1300, HW001G	197853-7	
Absorption connector set	DHW080, HW1200 HW1300, HW001G	197881-2	
One touch joint set	DHW080, HW1200 HW1300, HW001G	197883-8	
Cleaner pin set	DHW080, HW1200 HW1300, HW001G	197879-9	
Shoulder belt Thakita	DHW080	16	52523-7

ACCESSORIES (OUTDOOR POWER EQUIPMENT)

Power washer accessories for DHW080, HW1200, & HW1300

Shape	Model No.	Part No.
Trigger gun set	DHW080, HW1200 HW1300, HW001G	197842-2
Variable nozzle set	DHW080, HW1200 HW1300, HW001G	197822-8
Variospray lance set	DHW080, HW1200 HW1300, HW001G	197876-5
Cyclone jet nozzle set	DHW080, HW1200 HW1300, HW001G	197824-4
Cyclone guard set	DHW080, HW1200 HW1300, HW001G	197864-2
Under body spray lance set	DHW080, HW1200* HW1300*, HW001G (*for 110-127V)	197859-5
	DHW080, HW1200** HW1300**, HW001G (**for 220V-240V)	198909-9
Extension pipe set (0.9m / 1.3m / 1.7m)	DHW080, HW1200 HW1300, HW001G	197870-7





Spark plug



Model No.	Wrench Size (mm)	Part No.
NGK CMR4A	16	168534-0
NGK CMR6A	16	168401-9
NGK CMR6H	16	168652-4
NGK CMR7A-5	16	168599-2
NGK BPMR7A	19	168648-5
NGK BPM7A	19	168588-7
NGK BPMR8Y	19	649500-1
NGK BMR7A	19	168662-1

High-performance 2-stroke engine oil 50:1



Model No.	Part No.
100ml	980008606
1L	980008607

Fuel mixture



Model No.	Part No.
1L	456236-3

Grease vessel set



Description	Size	Part No.
For Pole hedge trimmer and Multi-tool attachments (Cultivator, Power brush and Power sweep) (GREASE NO.0)	80ml	197439-7
For string trimmer, Brushcutter and Hedge trimmer (GREASE NO.2)	80ml	199450-5





Makita

GENERAL EQUIPMENT

GENERAL EQUIPMENT

Trakita

CF003GZ 450mm (17-3/4") Cordless Fan

40Vmax XGT / 18V LXT Li-Ion Cordless 450 mm (17-3/4") Fan

exsi lxe



W

AC Adaptor, Z: Battery and Charger are sold separately

40Vmax 18V

Fan head angle adiustment Automatic oscillation Continuous use (min.) w/o oscillation

Dimensions (LxWxH)

Airvelocity

Fan diamete

Up: 90°/Down: 45° Left: 90°/Right: 90° Left: 60, 90, 120° Right: 60, 90, 120° w/BL4040: 115/ w/BL4080F: 230/ w/BL1860B: 90 w/o Battery: 312 x 633 x 770 mm (12-1/4 x 25 x 30-1/4") w/o Battery: 7.9 kg (17.4 lbs.)

96-300 m/min

38-120 m³/min 450 mm (17-3/4")

CF002GZ 330mm (13") Cordless Fan

Increased max air velocity 240 m/min





w/oscillation Max Air Velocity Air Flow Noise level Fan Diameter Dimensions (LxWxH)

Net weiaht

Continuous Use (min.)

Continuous Use (min.)

w/BL4040: Low / Mid / High: 1,020 / 640 / 320 w/BL4040: Low/Mid/High: 970/610/305 High/Mid/Low: 240 / 170 / 120 m/min High / Mid / Low: 21 / 15 / 10 m³/min 52 dB(A) 330 mm (13") w/BL4040: 277 x 439 x 602 mm 3.8 - 5.1 kg (8.4 - 11.2 lbs.)

AC Adaptor, Z: Battery and Charger are sold separately



Compatible with

- 40Vmax XGT Li-lon battery
- 18V LXT Li-lon battery
- · AC (through AC adapter)











90° up/45° down with a locking knob





Three Off timer settings 1 hour, 2 hours, 4 hours

CF001GZ 235 mm (9-1/4") Cordless Fan

40Vmax XGT Automatic Swing Fan















Continuous Use (min.)

w/o oscillation

Max Air Velocity Air Flow

Dimensions (LxWxH) Net weight

w/BL4040 Low / Mid / High: 1,160/880/660 w/BL4025 Low/Mid/ High: 730/550/410 w/BL4040 Low / Mid / High: 1,055 / 800 / 600 w/BL4025 Low / Mid / High: 665 / 500 / 370 High / Med / Low: 190 / 150 / 120 m/min High/Med/Low: 8.2/6.5/5.2 m³/min 143x333x463 mm (5-5/8"x13"x18-1/4")

2.0 - 3.0 kg (4.4 - 6.6 lbs.)

18V

DCF301Z 330mm (13") Cordless Fan

Increased max air velocity 240 m/min

Li-ion Ah 6.0 5.0 3.0 1.5



14.4V 3 LXT 1

w/o oscillation Continuous Use (min.) w/oscillation

Continuous Use (min.)

Max Air Velocity Air Flow

Noise level Fan Diameter Dimensions (LxWxH) Net weight 3.8 - 4.5 kg (8.4 - 9.9 lbs.)

w/BL1860B: Low/Mid/High: 850/430/215 w/BL1860B: Low/Mid/High: 815/415/210 High / Mid / Low: 240 / 170 / 120 m/min High / Mid / Low: 21 / 15 / 10 m³/min 52 dB(A) 330 mm (13") w/RI 1860R 269 x 439 x 602 mm

AC Adaptor, Z: Battery and Charger are sold separately

DCF203Z 235 mm (9-1/4") Cordless Fan

Automatic Swing Fan



Max Continuous Use Max Air Velocity Air Flow Dimensions (LxWxH)Net weight

w/BL1860B: Low/Medium/High: 1,010/650/410 High / Med / Low: 190 / 150 / 120 m/min High/Med/Low: 8.2/6.5/5.2 m³/min 140x333x447 mm (5-1/2"x13"x16-1/2") 1.9 - 2.6 kg (4.2 - 5.6 lbs.)

DCF 102 ZX 1 180 mm (7-1/8") Cordless Fan

Automatic Swing Fan





Max Continuous Use w/BL1860B: (min.) Low/Medium/High: 1270 / 705 / 575 185x272x284 mm (7-1/4"x10-3/10"x11-1/8") (LxWxH) Net weight 1.3 - 2.0 kg (2.9 - 4.4 lbs.)









Z: Battery and Charger are sold separately











CW002GZ Cordless Cooler & Warmer Box

Large 50 L capacity

Li-ion Ab 8.0 5.0 4.0 2.5 2.0



40Vmax 18V

XGT LXT OR AS

Cooling Capacity

Capacity

Run Time

Cord Length

(LxWxH)

(LxWxH)

Storage dimensions

-18/-15/-10/-5/0/5/ 10°C (0/5/15/25/30/40 /50°F) 30/35/40/45/50/55/ Warming System

60°C (85/95/105/115/ 120/130/140°F) w/BLBL4040,-18/5/ 60°C:8/19.5/4.5 AC Adapter/Cigar Socket

50 L (13.2 gal)

Cable: 2 / 2.5 m (6.5 / 8.2 ft) 500 x 320 x 320 mm (19-3/4 x 12-5/8 x 12-5/8") 867 x 465 x 476 mm (34-1/8 x 18-1/4 x 18-3/4") 25.6 - 29.0 kg (56.4 - 63.9 lbs.)

Cigar Socket Cable, Z: Battery and Charger are sold separately

CW004GZ Cordless Cooler & Warmer Box

New

A combination of XGT battery and LXT battery is also accepted

Li-ion Ah 8.0 5.0 4.0 2.5 2.0



40Vmax 18V

XST LXI OR AS

Capacity 29 L (7.7 gal) Cooling System Warming System -18°C (0°F) 60°C (140°F) 17 settings: -18/-15/-10/-5 /0/5/10/15/ 20/25/30/35/ Temperature setting 40/45/50/55/60°C Run Time w/BL4050F x2, -18/5/ 60°C: 12.5/30.0/11.5 AC Adapter / Cigar Socket Cable: Cord Length 2.2/2.5 m (7.2/8.2 ft) 343 x 240 x 338 mm Storage Dimensions 676 x 345 x 471 mm (26-5/8 x 13-5/8 x 18-1/2")

Shoulder belt, AC adaptor, Cigar socket cable, Inner tray, Inner basket, 7: Battery and Charger are sold separately



Dual room mode is available by using the partition plate.



GENERAL EOUIPMENT

17 inside temperature settings

(7.7gal)





Work amount on full battery charge

with two BL4050F batteries / When used as one room

-18°C [0°F] about

about 30 h

Capacity Cooling System

Cooling Capacity

5°C [40°F]

60°C [140°F] about

7L (1.8 gal)

w/BLBL4040, -18/5/60°C: 5.5/13.5/5.5

5/10℃

Heater

Compressor type -18/-15/-10/-5/0/

CW001GZ Cordless Cooler & Warmer Box

Powered by 4 sources: 40Vmax / 18V / 12V/24V DC (cigar socket) / AC

Li-ion Ah 8.0 5.0 4.0 2.5 2.0



40Vmax 18V

XST LXT oo to

Cooling System Cooling Capacity

Warming System Warming Capacity

Run Time

Net weight

Cord Length

Dimensions (LxWxH)

20 L (5.3 gal) Compressor type -18/-15/-10/-5/ 0/5/10℃ Heater

7.5 - 20.9 kg (38.6 - 46.1 lbs.)

30/35/40/45/ 50/55/60℃ w/BL4050FX2, -18℃/5℃/60℃: 10h/28h/8.5h

ACAdapter/ Cigar Socket Cable: 2/2.5 m (6.5/8.2 ft) 663x341x372 mm

(26-1/8x13-3/8x14-5/8") 13.5 - 16.1 kg (29.8 - 35.5 lbs.) Net weight

Shoulder Belt, Cigar Socket Cable, Z: Battery and Charger are sold separately

CW003GZ Cordless Cooler & Warmer Box

Compact design, 7 L capacity Li-ion Ab 8.0 5.0 4.0 2.5 2.0



40Vmax 18V


XGT LXT OO HO

Warming System
Warming Capacity 30/35/40/45/ 50/55/60℃ Run Time Cord Length

AC Adapter / Cigar Socket Cable: 2/2.5 m (6.5/8.2 ft) 456 x 245 x 308 mm Dimensions (LxWxH) (18 x 9-5/8 x 12-1/8") 7.9 - 9.4 kg (17.4 - 20.7 lbs.) Net weight

Shoulder Belt, Cigar Socket Cable, Z: Battery and Charger are sold separately







GENERAL EQUIPMENT Tnakita

Popular size food container can be heated.



Heating time adjustment dial Power selection button Pause/Stop button Battery fuel gauge LED display panel

Continuous heating time on a full battery charge (approx)

500 w: 35 min

Battery: BL4080F x2

* This is the total time of repeated maximum 8-minute continuous heating at 500W in temporary boost mode





1. Stops heating promptly and automatically when tilted.

30°

2. Stops heating promptly and automatically when the door is opened during heating.

3. Reminder beep for items left in the cavity







Approx number of times an item can be heated With two fully charged BL4040 batteries

food container of chilled items **D** times

mug of drink (200mL) **O** times



Continuous heating time	on a full hattery charge	(annroy)

Batter	у	BL4020 x2	BL4025 x2	BL4040 x2	BL4050F x2	BL4080F x2	PDC1200
Microwave	350W	11 min	14 min	21 min	30 min	48 min	113 min
power	500W	6 min	8 min	15 min	22 min	35 min	84 min

MW001GZ Cordless Microwave

Li-ion Ah 8.0 5.0 4.0 2.5 2.0

New

Excellent portability



40Vmax

Useful cavity dimensions 255 x 241 x 120 mm (W x D x H) (10 x 9-1/2 x 4-3/4") Cavity capacity
Microwave power High / Low: 500 / 350 W Operating frequency Continuous run time on 2.450 MHz w/BL4020 x2: 11 / 6 min., w/BL4025 x2: 14 / 8 min., full battery charge (350/500W) w/BL4040 x2: 21 / 15 min., w/BL4050F x2: 30 / 22 min., w/BL4080F x2: 48 / 35 min.. w/PDC1200: 113/84 min. Dimensions w/o Batterv: (LxWxH) 318 x 343 x 338 mm (12-1/2 x 13-1/2 x 13-1/4") w/o Battery: 8.9 kg (19.6 lbs.) Net weight

Z: Battery and Charger are sold separately

MR006G Job Site Radio

12Vmax-40Vmax CXT LXT XGT Li-lon Cordless Bluetooth Job Site Radio



Frequency Band FM/AM:87.5-108MHz/ FM/AM:87.5 - 108 MHz/ 522 - 1,710 kHz 50des: Dia. 63.5 mmx2 Bottom: Dia. 101.6 mm 40Vmax: 5 W x2 + 25 W / 18V: 5 W x2 + 25 W / 14.4V: 3 W x2 + Max Output 5WX2+25W/14.4V:5WX2+ 15W/12Vmax:2Wx2+10W Version:5.0 Profile:A2DP/SCMS-T/AVRCP Rluetooth Supported Codec: SBC Max Transmission Range 10 m (33 ft) w/Handle in Retracted Position: 285 x 172 x 305 mm Dimensions (LxWxH) 5.6-6.4 kg (12.3-14.1 lbs.)

40Vmax AC Adaptor, AA Battery

18V 14.4V

DMR300 Job Site Radio

12Vmax 10.8V



MR002G Job Site Radio

12Vmax-40Vmax CXT LXT XGT Li-lon Cordless Bluetooth Job Site Radio



18V

FM / AM: 87.5 - 108 MHz / Freauency Band 522 - 1,710 kHz Speaker Size Woofer: Dia. 89 mm x2 . Max Output 40Vmax: 3.5 W x2 Bluetooth Version: 5.0 Prole: A2DP / SCMS-T Supported Codec: SBC Max Transmission Range (Optimum): 10 m (33 ft) Dimensions (L x W x H) w/Handle in Upright Position: 280 x 171 x 434 mm (11 x 6-3/4 x 17-1/8") 4.6 - 5.4 ka (10.1 - 11.9 lbs.) Net weigh 14.4V 10.8V EXET LXT CXT DO AC

AC Adaptor, AA Battery

40Vmax

12Vmax-18V CXT LXT Li-lon Cordless Bluetooth Job Site Charger Radio Li-ion Ab 6.0 5.0 3.0 1.5



FM / AM: 87.5 - 108 MHz / Freauency Band 520 - 1,710 kHz Speaker Size Woofer: Ø89 mm x2 Bluetooth Version: 4.2 Max Transmission Ranae (Optimum): 30 m (98 ft) Dimensions 285x185x305 mm (11-1/4"x7-1/4"x12") (LxWxH) 4.4 kg (9.7 lbs.) Net weight

10.8V 18V 14.4V





AC Adaptor, AA Battery





7.2V-18V CXT LXT Li-lon Cordless Bluetooth Job Site Radio





FM / AM: 87.5 - 108 MHz / Frequency Band 522 - 1,710 kHz Woofer: Ø89 mm x2 Max Output 18V: 3.5 W x2 / 14.4V: 2.2 W x2 / 12Vmax: 1.2 W x2 / 7.2V: 0.5 W x2 Bluetooth

Version: 4.0
Profile: A2DP/SCMS-T
Supported Codec: SBC Max Transmission Range 10 m (33 ft) w/ Handle in Upright

Dimensions Position: 262x163x431 mm (10-3/8"x6-3/8"x17") 4.4 kg (9.7 lbs.) (LxWxH) Net weight

AC Adaptor, AA Battery

Bluetooth



MR010G Cordless Radio with Lantern

18V 14.4V 12Vmax 10.8V 7.2V

40Vmax XGT Cordless Bluetooth Radio with Lantern





8 Bluetooth exsi XPT

Strap Hook, Battery and Charger are sold separately

Frequency Band Speaker Size Illuminance FM: 87.5-108 MHz FM: 87.3-108 MHZ Ø57 mm Flashlight 1,000/500, Lantern: Daylight white 145/72, Neutral white 140/70, Warm white 130/65 Flashlight: 200/100, Lantern: Daylight white 310/155, Warm white 260/130 Varsion: 5.0 Peofler (High/Low) Luminous flux (High/Low) Bluetooth Version: 5.0, Profile: A2DP, SCMS-T, AVRCP, AZUP, SCMS-1, AVRCP, Supported Codec: SBC, Max Transmission Range (Optimum): 10 m (33 ft) w/o Battery: 126 x 127 x 240 mm (5 x 5 x 9-1/2") 1.6 - 2.2 kg (3.5 - 4.9 lbs.) (L x W x H) Net weight

DMR057 Cordless Radio with Lantern

18V/14.4V LXT Cordless Radio with Lant



Bluetooth 14.4V <u>LXT XPT</u>

Strap Hook, Battery and Charger are sold separately

anı	em	
	Frequency Band Speaker Size	FM: 87.5-108 MHz Ø57 mm
	Illuminance (High/Low)*	Flashlight: 1,000/500, Lantern: Daylight white 145/72, Neutral white 140/70, Warm white 130/65
	Luminous flux (High/Low)	Flashlight: 200/100, Lantern Daylight white 310/155, Neutral white 300/150, Warm white 260/130
	Bluetooth	Version: 5.0, Profile: A2DP, SCMS-T, AVRCP, Supported Codec: SBC, Max Transmission Range (Optimum): 10 m (33 ft)
	Dimensions (L x W x H)	w/o Battery: 126 x 127 x 240 mm (5 x 5 x 9-1/2")
	Net weight	13-16ka (29-35lbs)



GENERAL EQUIPMENT

Trakita

at 1m from the light source:

2,100/1,000/500lx High/Mid/Low: 3,600/

mm (9-3/4 x 12-1/8 x

4.6-6.5 kg (10.1-14.3 lbs.)

1,800/900 lm w/Handle in Retracted Position: 248 x 309 x 296

11-5/8")



XGT LXT Li-lon Cordless 96 LED Worklight, 10,000 Lumens

Li-ion Ah 8.0 5.0 4.0 2.5 2.0

Run Time (hrs) w/BL4040 x2. Low/Mid/ High: 14/6.5/2.4 at 1m from the light source: Illuminance (High/Mid/Low) 4,300/1,900/1,000 lx at 3 m from the light source: 500/230/110 lx Luminous Flux High/Mid/Low: 10,000/ 4.000/2.000 lm w/ Handle in Retracted Position: 248 x 386 x 305 Dimension (LxWxH) Net weiaht

mm, w/Handle in Upright Position: 248 x 386 x 430 mm

6.4 - 9.9 kg (14.1 - 21.8 lbs.)

40Vmax 18V 14.4V

ML005GX Cordless Worklight

Li-ion Ah 8.0 5.0 4.0 2.5 2.0

EXST LXT Battery and Charger are sold separately

40Vmax XGT Li-Ion Cordless LED Worklight, 3,600 Lumens

Illuminance

(High/Mid/Low)

Luminous Flux

(LxWxH)

Net weight

40Vmax 18V 14.4V XGT LXX Anti-glare film, Battery and Charger are sold separately

Makita Long-distance irradiation 640_m Lighting coverage **6.0**_m (side: 6.0m) *measured in accordance with ANSI DML813 Front 4.5_m (side: 5.3m) DML814 Front Front Front **2.8**m **2.8**m 4.7_m 2.3_m (side: 5.6m) DML805 ML003G DML813 / DML814 DML812 ML007G **DML811**

Luminous flux



750 lm



1,100 lm





1,250 lm Spot+Flood mode




3,000 lm

Tnakita.





GENERAL EQUIPMENT

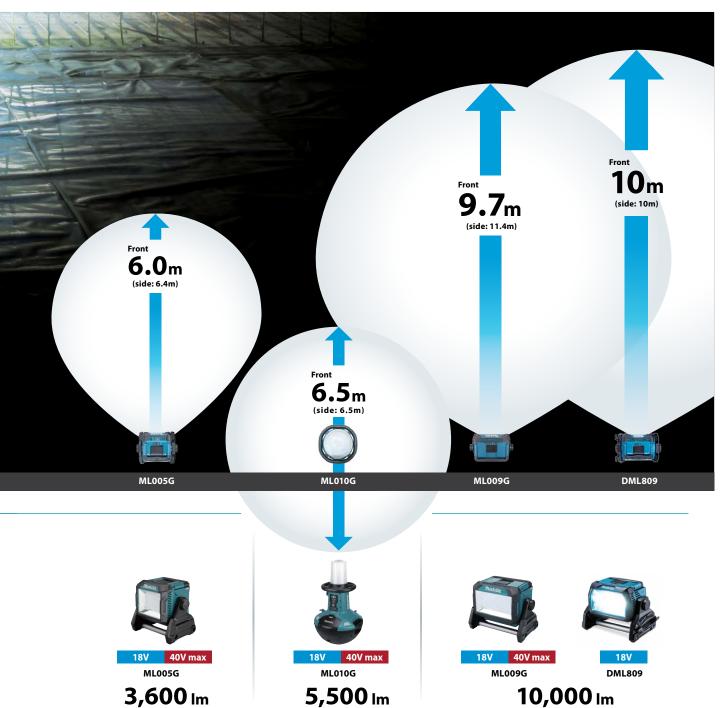

GENERAL EQUIPMENT

Trakita

DML809 18V, 14.4V / AC Cordless Worklight

Cordless 96 LED Worklight, 10,000 Lumens

Li-ion Ah 6.0 5.0 3.0 1.5



18V 14.4V



D LXT ook

Run Time (hrs) Illuminance (High/Mid/Low)

Luminous Flux

Dimensions $(I \times W \times H)$

Un to: 8.5 at 1m from the light source: 3,800/1,500/800 lx at 3m from the light source: 380/150/80 lx at 5m from the liaht source. 150/60/30lx Hiah/Mid/Low 10,000/4,000/2,000 lm w/Handle in Retracted

Position: 249x370x278 mm (9-3/4"x14-1/2"x11") w/Handle in Upright Position: 249x370x370 mm (9-3/4"x14-1/2"x14-1/2") 5.7-7.0 kg (12.6-15.4 lbs.)

Net weight upply Cord: 2.5 m (8.2 ft)

AC Power Cord. Battery and Charger are sold separately

DML805 Corded and Cordless LED Worklight

L.E.D. Lights Deliver Bright and Even Lighting For Large Workspaces

Li-ion Ah 6.0 5.0 3.0 1.5



Run Time (hrs)

Up to: 17 at 0.5m from the liaht source Hi: 1,150 lx, Lo: 750 lx at 1m from the light source Hi: 300 lx, Lo: 200 lx

2.3 - 2.7 kg (5.1 - 5.9 lbs.)

Luminous Flux Net weiaht

Power supply cord: 2.5m (8.2ft)

18V 14.4V 🔳 🖭 Battery and Charger are sold separately

DML813 / DML814 Cordless Worklight

Cordless 12 LED Worklight, 3,000 Lumens



Run Time (hrs) Illuminance (High/Mid/Low)

Luminous Flux

Dimensions

10/5.5/3 at 1m from the light source: 1,250/750/400 lx at 3m from the light source: at 3m from the light source: 130/80/40 lx 130/80/40 lx 4t 5m from the light source: 50/30/15 lx High/Mid/Low: 3,000/1,700/900 lm Folding Position: 260x216x1,000 mm 260x210x1,000 mm (10-1/4"x8-1/2"x39-3/8") Operating Position (Max Height): 573x658x1,250-2,240 mm (22-1/2"x26"x49-1/4"-88") DML813:72-7.9 kgv DML813:72-7.9 kgv

w/BL1850(B) Low/Mid/High:

Net weight

ML010G 40Vmax, 18V, 14.4V / AC Cordless Area Worklight

40Vmax XGT / 18V, 14.4V LXT Li-Ion Cordless Area Worklight, 5,500 Lumens



18V 14.4V

AC power cord. Battery and Charger are sold separately

(High / Med. / Low)

Luminous flux

Continuous run time on full battery charge (High / Med. / Low)

Net weiaht

at 1 m from the light source: 550 / 300 / 150 lx at 3 m from the light source: 70 / 40 / 20 lx at 5 m from the light source: 25 / 15 / 7 lx Hiah / Med. / Low 5,500 / 3,000 / 1,500 lm w/BL1860B x2: 4.5 / 8.5 / 16 hours w/BL4040 x2:

6.5 / 11 / 21 hours 490 x 490 x 814 mm Dimensions (L x W x H) 14.4 - 19.2 kg (31.7 - 42.3 lbs.)

exer let ook xpr

Shoulder Belt. Battery and Charger are sold separately

Up to 4 batteries can be installed in parallel.

two LXT batteries + two XGT batteries



Continuous run time (approx)

59 hours

Battery: BL4080F x2 & BL1860B x2 all LEDs light up

3 brightness settings

with memory function of the setting last time you power off



Improved Self-righting performance max max 80° photo: ML010G

DML810 18V, 14.4V / AC Cordless Area Worklight

18V/14.4V LXT Li-lon Cordless 202 LED Area Worklight, 5,500 Lumens



Run Time (hrs) Illuminance (High / Mid / Low)

Luminous Flux

Dimensions

Net weight

Up to: 18 at 1m from the light source: 550/300/150 lx at 3m from the light source: 70 / 40 / 20 lx at 5m from the light source: 25 / 15 / 7 lx High / Mid / Low: 5,500 / 3,000 / 1,500 lm 420 x 420 x 787 mm (16-1/2 x 16-1/2 x 31") 13.9 - 15.3 kg (30.6 - 33.7 lbs.)

wer Supply Cord: 2.5 m (8.2 ft)







AC Power Cord. Battery and Charger are sold separately





ML007G Cordless Flashlight

40Vmax XGT Li-lon Flashlight Provides 500 Lumens





Run Time (hrs)	Up to: 14 (Spot, with BL4050F)
Illuminance	Spot/Flood/Spot-Flood 82,000/520/60,000 lx
Luminous Flux	Spot/Flood/Spot-Flood 600/1,000/1,250 lm
Dimensions (L x W x H)	w/BL4025: 330 x 120 x 118 mm (13 x 4-3/4 x 4-5/8")
Net weight	16-29ka (35-64lbs)

DML812 Cordless Flashlight

LED Flashlight, 1,250 Lumens



14.4V



Strap Hook. Battery and Charger are sold separately

Run Time (hrs)	Up to: 10 (Spot, with BL1860B)
Illuminance	at 1m from the light source Spot Mode/ Flood Mode/ Spot-Flood Mode: 71,000/520/51,000 lx
Luminous Flux	Spot Mode/Flood Mode/ Spot-Flood Mode: 600/1,000/1,250 lm
Dimensions (LxWxH)	w/BL1830B/BL1850B/ BL1860B: 313x119x115 mm (12-3/8"x4-11/16"x4-1/2")
Net weight	1.2-1.6 kg (2.6-3.4 lbs)

GENERAL EQUIPMENT

Illuminance: at 1m from the light source

40Vmax

exal XPT

Battery and Charger are sold separately

ML001G LED Flashlight

40Vmax XGT Li-lon LED Flashlight, 160 Lumens



Run Time (hrs)	Up to: 55
Luminous	Flux	160 lm
Illuminand	re	at 1m from the light source: 3,000 lx
Dimension	15	w/BL4025:
(L x W x H)		281 x 88 x 121 mm
		(11-1/8 x 3-1/2 x 4-3/4") w/ BL4040:
		287 x 88 x 136 mm
		(11-1/4 x 3-1/2 x 5-3/8")
Net weight	t	1.0 - 1.3 kg (2.2 - 2.9 lbs.)

DML815 18V, 14.4V Cordless LED Flashlight

18V / 14.4V LXT Li-lon LED Flashlight, 160 Lumens

LXT XPT 8



	Run Time (hrs)	Up to: 54
	Luminous Flux	160 lm
	Illuminance	at 1m from the light
		source: 3,000 lx
	Dimensions (LxWxH)	w/BL1830B / BL1850B /
		BL1860B:
		272x79x116 mm
		(10-3/4"x3-1/8"x4-9/16")
	Net weight	0.26 - 0.93 kg
		(0.57 - 2.05 lbs.)

14.4V

Strap Hook, Battery and Charger are sold separately





Strap Hook. Battery and Charger are sold separately

ML106 Cordless Flashlight







Run Time (hrs)	Up to: 12
Luminous Flux	190 lm
Luminous	at 1m from the light source: 170 - 4,500 lx
Dimensions	w/BL1016/BL1021B:
(LxWxH)	271 x 66 x 93 mm
	(10-5/8 x 2-5/8 x 3-5/8'
	w/BL1041B:
	290 x 66 x 93 mm
	(11-3/8 x 2-5/8 x 3-5/8'
Net weight	0.61 - 0.78 kg (1.3 - 1.7 lbs.)

Run Time (hrs) Up to: 51 Main light (on bar side) Luminous flux (Full brightness): 710 lm









40Vmax XGT Li-lon 21 LED Worklight, 710 Lumens

Strap Hook. Battery and Charger are sold separately

ML002G Cordless LED Worklight

Li-ion Ab 5.0 4.0 2.5 2.0

DML807 Cordless LED Flashlight

18V / 14.4V LXT Li-lon 21 LED Flashlight



A. C.

Run Time (hrs)	Up to: 43
Main light (on bar side)	Luminous flux (Full
	brightness): 710 lm
	Illuminance (Full
	brightness): 340 lx
Sub Light (on top side)	Luminous flux: 130 lm
	Illuminance: 1,900 lx
Dimensions	414 x 79 x 155 mm
(LxWxH)	(16-1/4 x 3-1/8 x6-1/8")
Net weight	0.72 - 1.1 kg
	(1.6 - 2.4 lbs.)

Length (with the hook stood). Illuminance: at 50 cm from the light source

M CON XPT 6

Length (with the hook stood). Illuminance: at 50 cm from the light source

Illuminance (Full brightness): 340 lx Luminous flux (Half brightness): 340 lm Illuminance (Half brightness): 310 lx

Luminous ux: 130 lm Illuminance: 1,900 lx w/BL4025: 376 x 86 x 126 mm w/BL4040: 382 x 86 x 141 mm

1.2 - 1.5 kg (2.7 - 3.3 lbs.)

14.4V LXT XPT USB



Battery and Charger are sold separately

Sub light (on top side)

(LxWxH)

Net weight

GENERAL EQUIPMENT

Trakita

ML006G Cordless Flashlight

40Vmax XGT Li-lon Flashlight Provides 500 Lumens

Li-ion Ab 5.0 4.0 2.5 2.0



Illuminance (at 0.5m from the light source) Luminous Flux

Run Time (hrs)

(Low mode, with BL4040) Hiah/Medium/Low 800/400/180 lx Hiah/Medium/Low: 500 / 250 / 100 lm w/BL4040: Dimensions 275 - 408 x 85 x 148 mm (10-7/8 - 16 x 3-3/8 x 5-7/8")

Up to: 82

Net weiaht 1.1 - 1.7 kg (2.4 - 3.8 lbs.)

DML816 Cordless Flashlight

Li-ion 6.0 5.0 3.0 1.5

18V LXT Li-lon Flashlight Provides 500 Lumens

Illuminance (at 0.5m from the light source) Luminous Flux Dimensions

Run Time (hrs)

500/250/100lm w/BL1830B/ BL1850B/BL1860B: 267 - 400 x 79 x 127 mm (10-1/2 - 15-3/4 x 3-1/8 x 5") 0.70 - 1.1 kg (1.5 - 2.4 lbs.)

(Low mode, with BL1860B)

High/Medium/Low:

Hiah/Medium/Low:

800/400/180 lx

Up to: 75

Net weight

18V 14.4V

LXT XPT

Shoulder hook set, Lamp shade, Battery and Charger are sold separately

40Vmax

exer XPT

Shoulder hook set, Lamp shade, Battery and Charger are sold separately

ML011G Cordless Worklight

40Vmax XGT Li-Ion Cordless Worklight, 300 Lumens

Li-ion Ab 5.0 4.0 2.5 2.0



(at 0.5 m from the light source)

240/190/190 lx Sidelighting + Uplighting/Sidelighting only/Uplighting only: 300/150/150 lm Luminous flux

Run time (hrs) w/BL4040, at 300 lm: 37. w/BL4040. at 150 lm: 64

Dimensions (LxWxH) Net weight

w/o Battery: 107 x 77 x 50 mm 0.19 kg (0.42 lbs.)

Sidelighting +

Uplighting / Sidelighting only / Uplighting only:

DML817 Cordless Worklight

18V/14.4V LXT Li-lon Cordless Worklight, 300 Lumens

Li-ion Ah 6.0 5.0 3.0 1.5

14.4V



LXT USB

(at 0.5 m from the light source)

Luminous flux

Run time (hrs)

Sidelighting + Uplighting / Sidelighting only / Uplighting only: only / Uplighting only: 240 / 190 / 190 lx Sidelighting + Uplighting / Sidelighting only / Uplighting only: 300 / 150 / 150 lm w/BL1860B, at 300 lm: 28, w/BL1860B, at 150 lm: 49

w/o Battery: 107 x 77 x 50 mm Dimensions (LxWxH) 0.21 kg (0.46 lbs.) Net weight

€XŒZ USB

Warm color cover, Battery and Charger are sold separately















ML107 Cordless Worklight

12Vmax CXT Li-lon Cordless Worklight, 200 Lumens

Li-ion Ah 5.0 4.0 2.0 1.5



Illuminance (at 0.5 m from the light source)

Luminous flux

175/130/130 lx Sideliahtina + Uplighting / Sidelighting only / Uplighting only: 200 / 100 / 100 lm w/BL1041B, at 300lm: Run time (hrs) 17, w/BL1041B, at 150lm: 29

Dimensions (LxWxH)

w/o Battery: 92 x 54 x 47 mm 0.29 kg (0.13 lbs.)

Sidelighting + Uplighting/Sidelighting only/Uplighting only:

CXT USB

Warm color cover, Battery and Charger are sold separately

MP001GZ Cordless Inflator

3 Inflation modes (High speed, Low speed or Ball modes)





Air Discharge Amount Max Air Pressure Hose Length Sound Pressure

700 kPa: 12 L/min1 1.110 kPa (161 PSI) [11.1 bar] 65 cm (25-1/2") 71 dB(A) Dimensions (LxWxH) w/BL4020/BL4025: 320 x 108 x 231 mm (12-5/8 x 4-1/4 x 9-1/8"), w/BL4040: 329 x 108 x 231 mm (13 x 4-1/4 x 9-1/8"), w/BL4050F: 351 x 108 x 231 mm (13-3/4 x 4-1/4 x 9-1/8") 2.9-3.5 kg (6.4-7.7 lbs.)

200 kPa: 24 L/min









Net Weiaht

British Adapter, French Adapter, Ball Adapter, Swim Ring Adapter, Battery, Charger, Z: Battery and Charger are sold separately



DMP180Z Cordless Inflator

18V max LXT Li-Ion Cordless Inflator





Max Air Pressure Air Discharge amount Dimensions (LxWxH)

Net weight

830 kPa (121 PSI) 200 kPa: 10 L/min w/BL1830B/BL1850B/ BL1860B: 270x76x175 mm (10-5/8"x3"x6-7/8") 1.5 - 1.8 kg (3.3 - 4.0 lbs.)

MP100DZ Cordless Inflator

12Vmax CXT Li-lon Cordless Inflator





Max Air Pressure Air Discharge amount Dimensions (L x W x H)

Net weiaht

GENERAL EQUIPMENT

200kPa: 10 L/min w/BL1016/BL1021B: 235x74x173 mm (9-1/4"x2-15/16"x6-13/16") w/BL1041B: 255x74x173 mm (10"x2-15/16"x6-13/16") 1.2 - 1.3 kg (2.6 - 3.0 lbs.)

830 kPa



Valve adapter, Ball adapter, Floating tube adapter DZ: Battery and Charger are sold separately







AS001GZ02 Cordless Dust Blower

Achieves higher blowing force





Max blowing force Mode:4/3/2/1: 2.8/2.3/1.7/1.1 N Mode: 4/3/2/1: Max air volume 1.1/1.0/0.8/0.6 m³/min Max sealed suction 10.3 kPa Mode: 4/3/2/1: 13/17/25/50 Continuous Use (min.) Sound Pressure Level 79 dB(A) 2.5 m/s² or less w/BL4020/BL4025: Dimensions (LxWxH) 180 x 94 x 248 mm (7-1/8 x 3-11/16 x 9-3/4") 1.5 - 2.3 kg (3.3 - 5.1 lbs.) Net weight

DAS180Z Cordless Dust Blower

18V LXT BL Cordless Air Duster



Air volume 0-1.1 m³/min Air velocity 0-150 m/s Air pressure 0-18.0 kPa Mode 1: 0-1.1 N Mode 4: 0-2.8 N Blowing force Max Sealed Suction 9 3 kPa BL1860B, Mode 1:55 Continuous Use (min.) BL1860B, Mode 4: 15 w/o Battery: (LxWxH) 173 x 92 x 247 mm (6-13/16 x 3-5/8 x 9-3/4") Net weiaht 1.2 - 1.7 kg (2.6 - 3.7 lbs.)






D LXT BL

40Vmax A ED XGI BL Nozzle 3, Nozzle 7, Nozzle 13, Pinch valve nozzle, Wide range nozzle, Battery, Charge, Country-specific: Flexible nozzle complete, Air vent hose complete, Rubber attachment 20-30, Rubber attachment, Filter C complete, Belt clip, Z: Battery and Charger are sold separately

Nozzle, Pinch valve nozzle, Wide range nozzle, Flexible nozzle, Air vent hose, Rubber attachment, Filter, Belt clip, Battery, Charger, Z: Battery and Charger are sold separately











A wide range of applications

Can be used for a wide range of applications by replacing the tip nozzle















Hanging hole



4 stage air volume



Variable speed control by trigger



Safety Precautions

When using electric tools, basic safety precautions should always be followed to reduce the risk of fire, electric shock, and personal injury, including the following.

/// KEEP WORK AREA CLEAN.

Cluttered areas and benches invite injuries.

/// CONSIDER WORK AREA ENVIRONMENT.

Don't use power tools in damp or wet locations. Keep work area well lit. Don't expose power tools to rain. Don't use power tool in presence of flammable liquids or gases.

/// KEEP CHILDREN AWAY.

All visitors should be kept away from work area. Don't let visitors touch the tool or extension cord.

/// STORE IDLE TOOLS

When not in use, tools should be stored in a dry, high of locked up place, out of reach of children.

/// DON'T FORCE THE TOOL

It will do the job better and safer at the rate for which it was intended.

Don't force small tools or attachments to do the job of a heavy-duty tool. Don't use tools for purposes not intended.

Don't wear loose clothing or jewelry. They can be caught in moving parts. Rubber gloves and non-skid footwear are recommended when working outdoors. Wear protective hair covering to contain long hair.

/// USE SAFETY GLASSES.

Also use face or dust mask if the cutting operation is dusty.

/// DON'T ABUSE THE CORD.

Never carry the tool by the cord or yank it to disconnect it from the socket. Keep the cord away from heat, oil, and sharp edges.

Use clamps or a vise to hold the work. It's safer than using your hand and it frees both hands to operate the tool.

/// DON'T OVERREACH.

Keep proper footing and balance at all times.

/// MAINTAIN TOOLS WITH CARE

Keep cutting tools sharp and clean for better and safer performance. Follow instructions for lubrication and changing accessories. Inspect tool cord periodically and if damaged, have it repaired by an authorized service facility. Inspect extension cords periodically and replace, if damaged. Keep handles dry, clean and free from oil and grease.

/// DISCONNECT TOOLS.

When not in use, before servicing and when changing accessories such as blades, bits and cutters.

/// REMOVE ADJUSTING KEYS AND WRENCHES.

Form the habit of checking to see that keys and adjusting wrenches are removed from the tool before turning it on.

/// AVOID UNINTENTIONAL STARTING.

Don't carry a plugged-in tool with a finger on the switch. Ensure switch is OFF when plugging in.

/// USE OUTDOOR EXTENSION CORDS.

When tool is used outdoors, use only extension cords intended for outdoor use.

Watch what you are doing. Use common sense. Don't operate tool when you are tired.

/// CHECK DAMAGED PARTS.

Before further use of the tool, a guard or other part that is damaged should be carefully checked to determine that it will operate properly and perform its intended function. Check for alignment of moving parts, free running of moving parts, breakage of parts, mounting and any other conditions that may affect its operation. A guard or other part that is damaged should be properly repaired or replaced by an authorized service center unless otherwise indicated in this instruction manual. Have defective switches replaced by an authorized service facility. Don't use the tool if the switch does not turn it on and off.

/// GUARD AGAINST ELECTRIC SHOCK.

Avoid body contact with earthed or grounded surfaces (e.g. pipes, radiators, ranges, refrigerators).

/// REPLACEMENT PARTS.

When servicing a tool, use only identical replacement parts.

/// VOLTAGE WARNING:

Before connecting the tool to a power source (receptacle, outlet, etc.) Be sure the voltage supplied is the same as that specified on the nameplate of the tool. A power source with voltage greater than that specified for the tool can result in SERIOUS INJURY to the user V as well as damage to the tool. If in doubt, DO NOT PLUG IN THE TOOL. Using a power source with voltage less than the nameplate rating is harmful to the motor.

Note

- Makita reserves the right to change specifications of parts and accessories without notice.
- Items of standard equipment and specifications may vary by country or area.
- · Net weight and dimensions may differ by the type of battery.
- Standard export color for motor housing is Makita industrial green (blue).
- Please state required voltage when ordering. These offers are subject to availability in each country. Actual product color may differ slightly from color reproduced here.
- Weight data in this catalogue is the value measured by us according to EPTA Procedure 01/2003.

Warranty

Every MAKITA tool is thoroughly inspected and tested before leaving the factory. Subject to the following Terms and Conditions from the date of purchase, this tool is warranty against defective materials and manufacturing defects for a period of 6 MONTHS for AC and non brushless DC tools. As for brushless DC tools it will be a period of 12 MONTHS. Same goes to Makita charger warranty, against defective materials and manufacturing defects for a period of 12 MONTHS. As for Makita Light will be a period of 6 MONTHS.

The period and conditions of our warranty as follows:

- 1. Sales receipt must be presented when servicing or warranty is required.
- 2. Warranty ONLY cover tools distributed by Makita Singapore Pte. Ltd. Warranty does not cover tools purchased overseas or distributed by other countries.
- 3. This warranty is valid base on the original purchase receipt with "Date of Purchase", "Model Number" & "Serial Number".

This warranty will be null & void in any of the following events during the warranty period:

- 1. The product unit has undergone repair, attempted repair, dismantle or modification in any way whatsoever by any other person.
- 2. Damage resulting from use of improper accessories, non-genuine replacement parts, disassembly, tampering, alternation and repairing in any way that affects the reliability
- 3. Damage resulting from negligence, accident, disaster, improper storage or maintenance, abuse and misuse in evident caused by overloading the tool beyond its capacity.
- 4. Abnormal voltage or usage of generator, wrong usage not in accordance with the Operation Manual.
- 5. If the Serial Number on the tool, seal on the battery and charger has been defaced or removed.
- 6. If any information on the warranty card has been defaced, removed, altered, unreadable or unclear (date of purchase, Serial Number, etc.)
- ** Makita reserved the rights of amend conditions of warranty without prior notice.

Please visit our website for Makita's Service Centre information

http://www.makita.com.sg/servicing-the-customer



Makita Cordless Part Number Breakdown		
DSE	Charger (DC10WA), 2X7.2V - 1.0Ah Batteries (BL7010)	
DW	Charger (DC10WA), 1X10.8V - 1.3Ah Battery (BL1013)	
DWE	Charger (DC10WA), 2X10.8V - 1.3Ah Batteries (BL1013)	
DWYE	Standard Charger (DC10WD), 2X12Vmax - 1.5Ah Batteries (BL1016)	
DSYE	Fast Charger (DC10SB), 2X12Vmax - 1.5Ah Batteries (BL1016)	
DSAE	Fast Charger (DC10SB), 2X12Vmax - 2.0Ah Batteries (BL1021B)	
DSAJ	Fast Charger (DC10SB), 2X12Vmax - 2.0Ah Batteries (BL1021B), Makpac	
DSME	Fast Charger (DC10SB), 2X12Vmax - 4.0Ah Batteries (BL1041B)	
SYE	Standard Charger (DC18SD), 2X18V - 1.5Ah Batteries (BL1815B)	
RYE	Rapid Charger (DC18RC), 2X18V - 1.5Ah Batteries (BL1815B)	
SF	Standard Charger (DC18SD), 1X18V - 3.0Ah Battery (BL1830B)	
RF	Rapid Charger (DC18RC), 1X18V - 3.0Ah Battery (BL1830B)	
RFE/ RF2	Rapid Charger (DC18RC), 2X18V - 3.0Ah Batteries (BL1830B)	
RFJ	Rapid Charger (DC18RC), 2X18V - 3.0Ah Batteries (BL1830B), Makpac	
RME	Rapid Charger (DC18RC), 2X18V - 4.0Ah Batteries (BL1840B)	
RTE/ RT2	Rapid Charger (DC18RC), 2X18V - 5.0Ah Batteries (BL1850B)	
RTJ	Rapid Charger (DC18RC), 2X18V - 5.0Ah Batteries (BL1850B), Makpac	
PT2	Dual Port Rapid Charger (DC18RD), 2X18V - 5.0Ah Batteries (BL1850B)	
PG2J	Dual Port Rapid Charger (DC18RD), 2X18V - 6.0Ah Batteries (BL1860B), Makpac	
G2	2X18V - 6.0Ah Batteries (BL1860B)	

Makita Coding System - Ending Alphabet



T - 5.0Ah G - 6.0Ah L - 8.0Ah **A** - 2.0Ah **D**- 2.5Ah

F - 3.0Ah

For more information, please contact Makita authorised distributor's technical team.

Other:

B - Double Insulation
C - Electronic Control
F - LED Light

K - Carrying Case 2 - 18V x 2 Tools

Z

Tool come with carton box only

lcon





Variable Speed



Brake



Mechanical 2-Speed





Mechanical 3-Speed Electronic 2-Speed



Electronic 3-Speed



Electronic 4-Speed



Keyless Chuck



Clutch-equipped



Torque Setting 6



Torque Setting 9



Torque Setting 16



Torque Setting 18



Torque Setting 20



Torque Setting 21



Torque Setting 21_41



Dust Collection



Torque Limiter



Constant Speed



Soft Start



Bevel Cutting 45 left



Bevel Cutting L45 R5



Bevel Cutting 45 LR



Makita Shank Jig Saw Blade



Bayonet Shank Jig Saw Blade



Laser Marker





Orbital Cutting



Hook & Loop



Depth Adjustment



Sequential and Bump-fire



Auto Firing Stop



Automatic Oiling Stainless Tank



Grass Tangle Removing Function



Chain Brake



Anti Vibration





Revolving Hose



Static Free Hose



SDS-PLUS Shank



SDS-MAX Shank



17mm Hex Shank



21mm Hex Shank



30mm Hex Shank



Built-in Job Light



Anti-restart function



Toolless blade change



www.makita.com.sq

TRADEMARKS















Makita Corporation and its affiliates (collectively referred to as "Makita") are the registered owners of the above trademarks and own the exclusive rights to these trademarks. A party who manufactures, advertises, offers for sale, sells, distributes, imports or exports power tools, batteries and/or related accessories using a trademark which is identical or similar to our trademarks may have infringed our trademarks. Makita take a serious view of trademark infringement and will not hesitate to take any legal action against any party who infringes our trademark rights.

Makita Singapore Pte Ltd

7, Changi South Street 3, Singapore 486348 Phone: +65-6546-8700 Fax: +65-6546-8711 Email: msgproductteam@makita.com.sg

Website: www.makita.com.sg Facebook: www.facebook.com/MakitaSG





