

Wide range of accessories available for various applications

Refer to the Accessory Catalogue for the detailed information on the shape, size, recommended use and material of each accessory.

Blade color coding	Wood/Metal	Wood	Metal	Multi Material	Grout Abrasive
Application	Wood/Metal	Wood	Metal	Multi Material	Grout Abrasive

Cutting (plunge cutting)



Applications:

Cutting of various materials such as oak wood, drywalls, plastics, copper pipes, non-hardened nails, etc.

Benefits:

- Different from jig saws, etc. able to make a plunge cut in the wall for electrical connection box, lighting, exhaust fan, etc.
- The blade can be positioned in twelve different angles to allow easy operation in tight spaces.

Cutting



Applications:

Cutting of various materials such as oak wood, drywalls, plastics, copper pipes, non-hardened nails, etc.

Benefits:

- Able to perform long distance push cut.
- The segment shape allows flush cutting.

Sanding



Applications:

Wood sanding, concrete sanding, or paint removal, etc. with a wide range of abrasive papers.

Benefits:

- Able to sand in corners.
- Connectable to vacuum cleaners with optional dust extraction system.

Removing grout/ Cutting tiles



Applications:

Replacing walls and floor tiles.

Benefits:

- Less amount of dust scattering thanks to oscillating action.
- The segment shape allows flush cutting.

Scraping



Applications:

Removing mortar, tile adhesive, hardened glue, window putty, caulking, paint, etc.

Benefits:

- Low-profile blade with a narrow tip allows easy removal of caulking, window putty, etc.

Accessories

Dust attachment set

Part No. 191R02-6

For dust extraction during sanding applications



Charging Time

Battery Model	Capacity	Fast Charging	
		DC40RA	DC40RC
*1 BL4020 191L29-0	2.0Ah	22 min	30 min
*1 BL4025 191B36-3	2.5Ah	28 min	38 min
*1 BL4040/F 191O6-8	4.0Ah	45 min	67 min
BL4050F 191L47-8	5.0Ah	50 min	85 min
BL4080F 191X65-8	8.0Ah	76 min	170 min

*1 Recommended battery

Cordless Multi Tool

TM001G

Variable Speed	Oscillation angle	3.6°
Constant Speed	Oscillations per minute	10,000 - 20,000 min ⁻¹
Soft Start	Vibration level (EN62841-2-4)	Sanding: 2.5 m/s ² or less
Dust Collection	Vibration level (EN62841-1)	Cutting w/ Plunge cut saw blade / Cutting w/ Segmental saw blade / Scraping: 2.5 m/s ² or less
Built-in Job Light	Vibration K factor (EN62841-2-4)	Sanding: 1.5 m/s ²
Anti-restart function	Vibration K factor (EN62841-1)	Cutting w/ Plunge cut saw blade / Cutting w/ Segmental saw blade / Scraping: 1.5 m/s ²
Toolless blade change	Sound pressure level (EN62841-2-4)	Sanding: 72 dB(A)
	Sound pressure level (EN62841-1)	Cutting w/ Plunge cut saw blade: 75 dB(A)
		Cutting w/ Segmental saw blade: 79 dB(A)
		Scraping: 74 dB(A)
	Noise K factor (EN62841-2-4)	Sanding: 3 dB(A)
	Noise K factor (EN62841-1)	Cutting w/ Plunge cut saw blade / Cutting w/ Segmental saw blade / Scraping: 3 dB(A)
	Circumference of grip portion	169 mm (6-5/8")
	Dimensions (L x W x H)	326 x 91.5 x 123 mm (12-7/8 x 3-5/8 x 4-7/8")
	Dimensions (Battery)	BL4025
	Net weight	2.1 - 3.3 kg (4.6 - 7.3 lbs.)
	Net weight (Battery)	BL4020 - BL4080F

Standard Equipment : Oscillating multi tool accessories, Dust attachment, Tool box, Battery, Charger

The weight may differ depending on the attachment(s), including the battery cartridge. Items of standard equipment and specifications may vary by country or area.

Makita Singapore Pte Ltd

7, Changi South Street 3, Singapore 486348
Phone : +65-6546-8700 Fax : +65-6546-8711
Email : msgproductteam@makita.com.sg
Website : www.makita.com.sg
Facebook : www.facebook.com/MakitaSG



MakitaSG



VISIT OUR WEBSITE



DOWNLOAD LEAFLET

PRINTED IN SINGAPORE

Makita[®] Cordless Multi Tool TM001G

XGT
40V Li-ion max

High-speed cutting with low vibration



STARLOCK



STARLOCK PLUS



STARLOCK MAX

Max. oscillations per minute

20,000 min⁻¹

Vibration level

2.5 m/s² or less

BL MOTOR AVT XPT

BL MOTOR High power brushless motor

Max. oscillations per minute **20,000 min⁻¹**



A wide oscillation angle combined with high-speed oscillating motion results in excellent work speed.


Highly efficient and compatible with **STARLOCK MAX** **STARLOCK PLUS**

Combination of high work efficiency and low vibration

AVT
Anti-Vibration Technology

Vibration level **2.5 m/s²**

Dual housing
Dual housing structure with separated vibration and grip sections

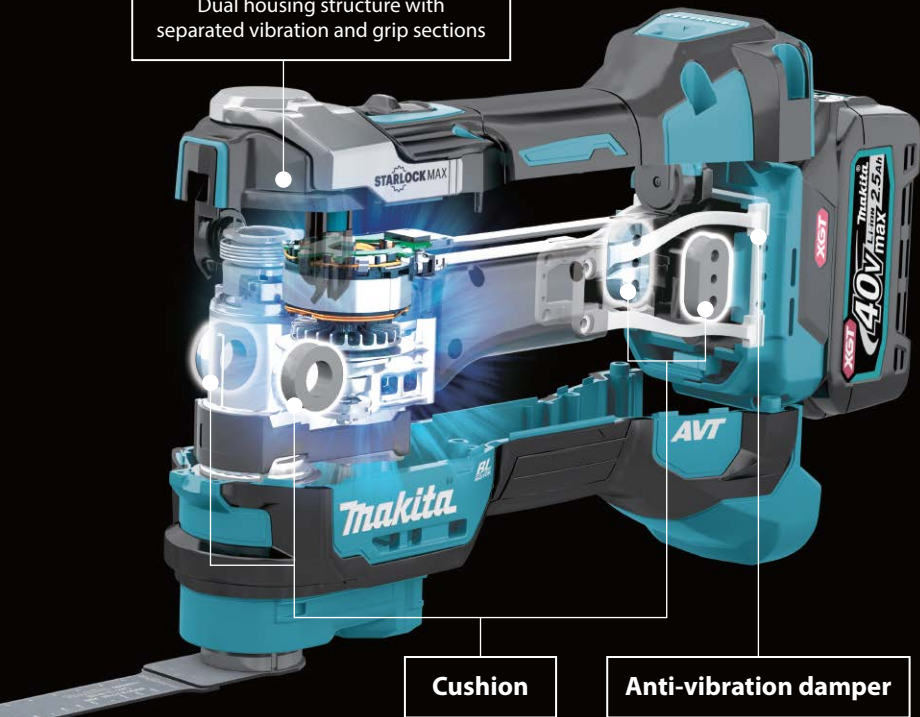

Work amount

Downward plunge cutting (at a pressing load of 25N) into a 38mm thick SPF

300 cuts

[Battery] BL4025 on a single full charge
[Accessory] STARLOCK MAX (MAM001)

The work amount depends to a great extent on the hardness of materials, etc.

High-speed cutting of various materials

Blade color coding	Wood/Metal	Wood	Metal	Multi Material	Grout/Abrasive
Application	Wood/Metal	Wood	Metal	Multi Material	Grout/Abrasive




Tool-less accessory clamp
Lever style lock system allows for quick installation and replacement of the accessories.



12 angle settings of accessory at every 30° from 0° to 360°



Small diameter grip for easy gripping
Slimmer grip design has been achieved by positioning the motor vertically on the front side.



Compatible with Dust attachment
for use with Sanding pad



Variable speed control by dial **LED job light**
Single LED with afterglow function

- Soft start
- Constant speed control
- Anti-restart function

