

Cordless Impact Wrench series



TW010G

3,150 N·m

Square drive size
1" (25.4mm)

● M27 - 45
● M20 - 33



TW001G

1,800 N·m

Square drive size
3/4" (19mm)

● M12 - 36
● M10 - 27



TW007G

760 N·m

Square drive size
1/2" (12.7mm)

● M10 - 24
● M10 - 16



TW004G

350 N·m

Square drive size
1/2" (12.7mm)

● M10 - 20
● M10 - 16



Accessories

Impact socket
with O-ring and pin



Size (mm)	Part No
27 x 60	E-24511
30 x 62	E-24527
32 x 63	E-24533
33 x 63	E-24549
34 x 63	E-24555
36 x 66	E-24561
38 x 66	E-24577
40 x 66	E-24583
41 x 68	E-24599

Impact deep socket
with O-ring and pin



Size (mm)	Part No
27 x 90	E-24686
30 x 90	E-24692
32 x 90	E-24701
33 x 90	E-24717
34 x 90	E-24723
36 x 90	E-24739
38 x 90	E-24745
40 x 90	E-24751
41 x 90	E-22420

O ring
E-22436



Pin
E-22442



Charging Time

	Fast Charging DC40RA	DC40RC
BL4040 4.0Ah 191B26-6	45 min	67 min
*1 BL4040F 4.0Ah 1910N6-8	45 min	67 min
*1 BL4050F 5.0Ah 191L47-8	50 min	85 min
*1 BL4080F 8.0Ah 191X65-8	76 min	170 min

*1 Recommended battery

Cordless Impact Wrench

TW010G 1" (25.4 mm)

Variable Speed	Square drive	25.4 mm (1")
Brake	Anvil length	163 mm (6-3/8")
Reversing	Max fastening torque	3,150 N·m (2,323 ft.lbs.)
Electronic 4-Speed	Fastening torque	Max/ Hard / Med. / Soft: 2,850 / 1,600 / 1,000 / 600 N·m (2,100 / 1,180 / 740 / 440 ft.lbs.)
Built-in Job Light	Nut-busting torque	4,000 N·m (2,950 ft.lbs.)
Anti-restart function	Fastening capacities	Standard bolt: M27 - M45 (1-1/8 - 1-7/8") High strength bolt: M20 - M33 (3/4 - 1-3/8")
	No load speed	Max / Hard / Med. / Soft: 0 - 1,200 / 0 - 850 / 0 - 700 / 0 - 600 min ⁻¹
	Impacts per minute (IPM)	Max / Hard / Med. / Soft: 0 - 1,750 / 0 - 1,500 / 0 - 1,300 / 0 - 1,200
	Sound pressure level	103 dB(A)
	Sound power level	111 dB(A)
	Noise K factor	3 dB(A)
	Vibration level	33.4 m/s ²
	Vibration K factor	1.6 m/s ²
	Dimensions (L x W x H)	w/ BL4050F: 570 x 135 x 297 mm (22-1/2 x 5-5/16 x 11-3/4")
	Net weight	12.0 - 12.9 kg (26.5 - 28.4 lbs.)
	Net weight (Battery)	BL4040F - BL4080F

Standard Equipment : Side handle, Tool hanger (Ring), Battery, Charger

The weight may differ depending on the attachment(s), including the battery cartridge.
Items of standard equipment and specifications may vary by country or area.

Makita Singapore Pte Ltd

7, Changi South Street 3, Singapore 486348
Phone : +65-6546-8700 Fax : +65-6546-8711
Email : msgproductteam@makita.com.sg
Website : www.makita.com.sg
Facebook : www.facebook.com/MakitaSG



MakitaSG



VISIT OUR WEBSITE



DOWNLOAD LEAFLET

PRINTED IN SINGAPORE

Makita

Cordless Impact Wrench
TW010G 1" (25.4 mm)

XGT
40V Li-ion max

1" (25.4mm) square

Max. fastening torque

3,150 N·m

6 seconds after seating, when tightening



Nut-busting torque

4,000 N·m

within 3 seconds, when loosening



BL MOTOR XPT

High power Brushless motor



For tightening large diameter bolts


1" (25.4mm) square

Max. fastening torque
3,150 N·m

6 seconds after seating, when tightening

Nut-busting torque
4,000 N·m

within 3 seconds, when loosening

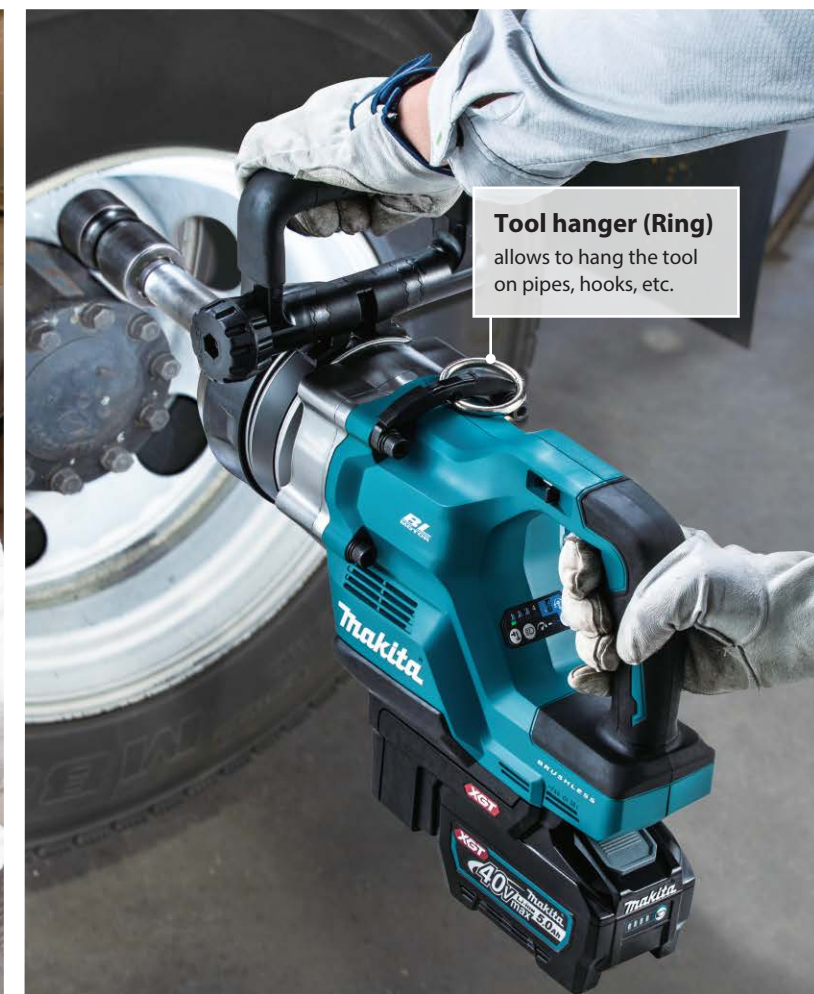

Tool hanger (Ring)
allows to hang the tool
on pipes, hooks, etc.

Compact 570 mm*



*Overall length, with BL4050F

Ring illumination LED

Reduces the shadow of the socket on a workpiece, providing a better view



Toolless installation of Side handle

Side handle can be installed 360° without a tool, and the angle of the holding section can be adjusted back and forth, making it suitable for a variety



Auto-stop system available in both forward / reverse rotation modes


3 modes of reaction time for automatic stop available both in forward and reverse rotation modes.

	Forward	Reverse
mode 1	At impact power 2, the tool stops automatically as soon as it has detected the first impact blow.	At impact power 4, the tool stops automatically as soon as it has stopped impact blow.
mode 2	At impact power 3, the tool stops automatically approximately 0.5 seconds after the moment it has detected the first impact blow.	At impact power 4, the tool stops automatically approximately 0.2 seconds after the moment it has stopped impact blow.
mode 3	At impact power 4, the tool stops automatically approximately 1.0 second after the moment it has detected the first impact blow.	At impact power 4, the tool automatically slows down after the moment it has stopped impact blow.

With regard to the reverse rotation mode (for loosening), the reaction time is set at the maximum impact power 4, which is the maximum capacity, because no adjustment of impact power is

Electronic 4 stage impact power selection


Both in forward and reverse rotation modes, max (4) / hard (3) / medium (2) / soft (1) impact power can be selected to suit the material of workpiece or bolt type simply by pushing the button.

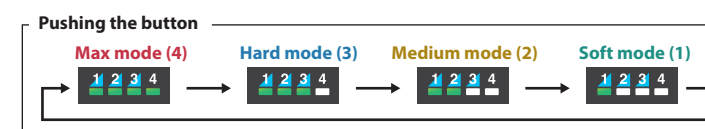

Mode	Max mode (4)	Hard mode (3)	Medium mode (2)	Soft mode (1)
Fastening torque (N·m)*1				
No load speed (min ⁻¹)				
Impacts per minutes (min ⁻¹)				

*1 3 seconds after seating, when tightening

XPT
(eXtreme Protection Technology)



Ring illumination LED switch
With preglow/afterglow functions and light mode

Full speed mode lamp

Full speed mode button (Variable speed / Full speed)

- Full speed is reached with less trigger pull, reducing fatigue in continuous operation.
- Variable speed mode or Full speed mode can be selected depending on applications.

