

Makita®

2025/26 (VERSION 1.0)



NEW LAUNCH

FEATURES / COMING SOON

EXPAND YOUR LITHIUM LINE UP

CXT

LXT

XGT

HS013G

Cordless Circular Saw

Blade diameter
415 mm



HS013GZ 415 mm (16-5/16") Cordless Circular Saw

New

High-power cutting of 6x timbers

Li-ion Ah 8.0 | 5.0 | 4.0 | 2.5 | 2.0

No load speed	2,100 min ⁻¹
Saw blade	Type: TCT saw blade / 35T, Diameter: 415 mm (16-5/16")
Max cutting capacity	0°: 158 mm (6-1/4"), 45°: 106 mm (4-3/16")
Dimensions (L x W x H)	606 x 233 x 476 mm (23-7/8 x 9-1/8 x 18-3/4")
Net weight	11.0 - 12.0 kg (24.3 - 26.5 lbs.)

40Vmax

TCT saw blade, Hex wrench, Joint, Protect stand, Battery, Charger, Z: Battery and Charger are sold separately

- The largest cordless circular saw in the world (As of August 2024)
- Comfortable cutting of thick materials with the high power similar to corded models
- Max cutting capacity: 158mm
- Auto-start Wireless System (AWS) connects to compatible vacuum cleaners with Bluetooth
- Bevel capacity: 0 - 45 degrees, right-side saw blade position



RP001G

Cordless Router

Net weight
4.0 kg
(with BL4025)

Overall height
Lower dead point
228 mm
(with BL4025)



- Excellent combination of high efficiency and lightweight design
- Compatible with a 1/2" collet chuck, 1,900 W Variable Speed Plunge Router
- Ergonomically designed Knob style handles for comfortable operation
- Auto-start wireless system (AWS)
- Variable speed control by dial



RP001GZ 12mm (1/2") Cordless Router

New

High power and Compatibility with 12mm Collet chuck

Li-ion Ah 8.0 | 5.0 | 4.0 | 2.5 | 2.0

Collet size	12 mm / - (- / 1/2")
Plunge Capacity	0-60 mm (0-2-3/8")
Base diameter	150 x 130 mm (5-7/8 x 5-1/8")
No Load Speed (RPM)	8,000-25,000 min ⁻¹
Dimensions (L x W x H)	w/ BL4025: 135 x 275 x 288 mm (5-5/16 x 10-7/8 x 11-3/8")
Net weight	4.0-5.2 kg (8.8-11.5 lbs.)

40Vmax

Wrench, Collet sleeve, Templet guide, Dust nozzle, Holder, Rod, Chip deflector, Battery, Charger, Spanner, Z: Battery and Charger are sold separately

Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ by the type of battery.



UB002G

Cordless Blower

Max air volume
3.6 m³/min

Battery: BL4040F / without nozzle



With the standard nozzle

- Maximum air volume of 3.6 m³/min
- Maximum air velocity of 99 m/s with the standard nozzle
- Compact and lightweight for single handed operation
- 3 air volume setting (high/medium/low)
- Variable speed control dial enables user to match the speed to the application for greater versatility
- Compatible with various nozzle accessories for increased versatility



UB002GZ Cordless Blower

New

40Vmax XGT Cordless Variable 3-Speed Blower

Li-ion Ah 8.0 5.0 4.0 2.5 2.0



No load speed	0 - 18,000 min ⁻¹
Blowing force	Blower: 3.1 - 3.2 N
Max air volume	Blower: 3.5 - 3.6 m³/min Vacuum: 2.0 m³/min
Max air velocity	Blower: 98 - 99 m/s
Max sealed suction	Vacuum: 5.4 kPa
Continuous use	Blower, High / Med. / Low: 20 / 60 / 120 min. Vacuum: 19 min.
Dimensions (L x W x H)	515 x 156 x 227 mm (20-1/4 x 6-1/8 x 8-15/16")
Net weight	2.0 - 3.5 kg (4.4 - 7.7 lbs.)

40Vmax



Nozzle, Dust bag, Battery, Charger, Z: Battery and Charger are sold separately

CL004G

Cordless Cleaner

Max
sealed suction
20 kPa

Highly durable professional-grade nozzle



CL004GZ Cordless Cleaner

New

4-Speed Cleaner with LED Light, Cyclone System, Electric Rotary Brush

Li-ion Ah 8.0 5.0 4.0 2.5 2.0



40Vmax



Nozzle assembly, Pipe assembly, Sash nozzle, Nozzle holder, Easy shake off filter, Battery, Charger, Motorized brush nozzle, Z: Battery and Charger are sold separately

Capacity	250 mL (8.5 oz)
Continuous use	w/ BL4025, Mode 1 / 2 / 3 / 4: 60 / 40 / 20 / 14 min
Max air flow	1.0 m³/min
Max sealed suction	20 kPa (2,000 mmH ₂ O)
Suction power	w/ Easy shake off filter, Mode 1 / 2 / 3 / 4: 20 / 40 / 70 / 110 W
Noise level	Mode 1 / 2 / 3 / 4: 54 / 59 / 62 / 65 dB(A)
Dimensions (L x W x H)	w/ Pipe & Nozzle, w/ BL4025: 1,094 x 243 x 186 mm (43 x 9-9/16 x 7-3/8")
Net weight	1.6 - 2.2 kg (3.5 - 4.9 lbs.)

- Switch: one touch push button
- Dust collection system: Cyclone type
- 4-mode suction power selection with mode memory function
- Maximum suction power of 110W with a low noise level of 66 dB(A) in maximum mode
- The electric rotary brush can be attached and detached without tools, making maintenance easy
- A high-speed brushless motor optimized for cordless cleaner



Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ by the type of battery.



TW011G

Cordless Impact Wrench



DTW1005

Cordless Impact Wrench



TW011GZ 19mm (3/4") Cordless Impact Wrench

New

1,500 N·m (1,110 ft.lbs.) Impact Wrench, Reverse Rotation Auto Stop Mode

Li-ion Ah 8.0 5.0 4.0 2.5 2.0



Square Drive	19.0 mm (3/4")
Max Fastening Torque	1,500 N·m (1,110 ft.lbs.)
Nut-busting torque	1,900 N·m (1,400 ft.lbs.)
No Load Speed (RPM)	Max / Hard / Med / Soft: 0 - 1,800 / 0 - 1,100 / 0 - 700 / 0 - 500 min ⁻¹
Impacts Per Minute (IPM)	Max / Hard / Med / Soft: 0 - 2,600 / 0 - 2,000 / 0 - 1,400 / N/A - N/A min ⁻¹
Dimensions (L x W x H)	w/ BL4025: 329 x 94 x 297 mm (13 x 3-11/16 x 11-3/4")
Net weight	4.3 - 5.5 kg (9.5 - 12.1 lbs.)

40Vmax



XGT BL XPT

Hook, Battery, Charger, Tool bag, Z: Battery and Charger are sold separately

DTW1005Z 19mm (3/4") Cordless Impact Wrench

New

With a 137mm (5-3/8") long anvil with a 19mm (3/4") square drive

Li-ion Ah 6.0 5.0 3.0 1.5



Square Drive	19.0 mm (3/4")
Max Fastening Torque	1,360 N·m (1,000 ft.lbs.)
Nut-busting torque	1,700 N·m (1,250 ft.lbs.)
No Load Speed (RPM)	Max / Hard / Med / Soft: 0 - 1,800 / 0 - 1,000 / 0 - 900 / 0 - 800 min ⁻¹
Impacts Per Minute (IPM)	Max / Hard / Med / Soft: 0 - 2,200 / 0 - 1,800 / 0 - 1,600 / N/A - N/A min ⁻¹
Dimensions (L x W x H)	w/ BL1860B: 339 x 91 x 291 mm (13-3/8 x 3-5/8 x 11-1/2")
Net weight	3.9 - 4.2 kg (8.6 - 9.3 lbs.)

18V



LXT BL XPT


Hook, Battery, Charger, Tool bag, Z: Battery and Charger are sold separately



- Long anvil with 19mm (3/4") Square drive
- Style of socket retention: C ring (with a hole)
- Electronic 4-stage impact power selection
- Constant speed control
- TW011G delivers up to 1,500 N·m fastening and 1,900 N·m nut-busting torque
- DTW1005 delivers up to 1,360 N·m fastening and 1,700 N·m nut-busting torque
- Mode settings suitable for tire removal and installation
- Ensures stable torque until the end of the battery capacity with constant speed control
- High water-resistance compatible with XPT

DDF490

Cordless Impact Wrench

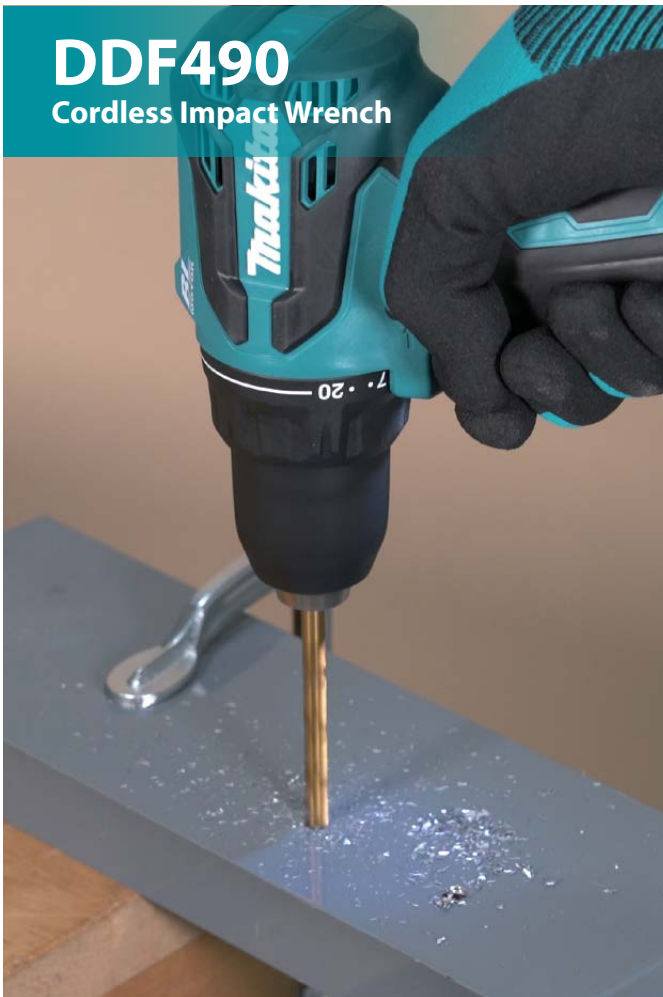

DHP490

Cordless Impact Wrench



DDF490RF / Z 13 mm (1/2") Cordless Driver Drill

New

18V LXT Brushless Cordless 13 mm (1/2") 65 N·m (580 in.lbs) Driver Drill

Li-ion Ah 6.0 5.0 3.0 1.5



Capacity	Steel: 13 mm (1/2") Wood: 38 mm (1-1/2")
Chuck Capacity	13 mm (1/2")
Max torque	65 N·m (580 in.lbs)
No Load Speed (RPM)	High: 0 - 1,900 Low: 0 - 500
Max Fastening Torque	Hard / Soft: 50 / 27 N·m
Dimensions (L x W x H)	167 x 81 x 237 mm (6-9/16 x 3-3/16 x 9-3/8")
Net weight	1.4 - 1.7 kg (3.1 - 3.7 lbs.)

18V



LXT BL XPT

Hand strap, Battery, Charger, Z: Battery and Charger are sold separately

- 13 mm (1/2") keyless chuck for quick and easy bit changes
- 20-stage torque adjustment
- Delivers up to 65 N·m (580 in.lbs) of torque and speeds of up to 1,900 rpm
- LED work light with pre-glow and after-glow
- Battery protection circuit to prevent overload, over-discharge, and overheating
- Reversing switch and belt hook for added convenience
- Ergonomic soft grip for comfort during extended use
- Drilling into concrete, brick, metal, wood, and all screwdriving jobs
- For DHP490: Three action modes are available: Drilling, Hammer drilling, and Screwdriving

DHP490RF / RFX1 / Z 3mm (1/2") Cordless Hammer Driver Drill

New

Provides increased efficiency with the maximum no-load speed of up to 1,900 rpm.

Li-ion Ah 6.0 5.0 3.0 1.5



Capacity	Masonry: 13 mm (1/2") Steel: 13 mm (1/2") Wood: 38 mm (1-1/2")
Impacts per minute	High: 0 - 28,500 min ⁻¹ Low: 0 - 7,500 min ⁻¹
Chuck Capacity	13 mm (1/2")
Max torque	65 N·m (580 in.lbs)
No Load Speed (RPM)	High: 0 - 1,900 Low: 0 - 500
Max Fastening Torque	Hard / Soft: 50 / 27 N·m
Dimensions (L x W x H)	172 x 81 x 237 mm (6-3/4 x 3-3/16 x 9-3/8")
Net weight	1.4 - 1.7 kg (3.1 - 3.7 lbs.)

18V



LXT BL XPT

Hand strap, Battery, Charger, Z: Battery and Charger are sold separately



Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ by the type of battery.

LXT **BL** **XPT**

DTC104

Cordless Cable Cutter



- With a maximum cutting capacity of 105 mm, the tool is capable of cutting large-diameter electric wires
- Cutting capacity: Polyethylene power cable: $\varnothing 72$ mm (4×325 mm²), PVC insulated multi-core cable: $\varnothing 77$ mm (3×325 mm²), Annealed copper wire: $\varnothing 105$ mm (1,300 mm²), Hard-drawn copper wire: $\varnothing 90$ mm (1,300 mm²), Aluminum wire: $\varnothing 105$ mm (1,300 mm²)
- Automatic reverse function
- Single LED job light with afterglow function



DTC104ZK Cordless Cable Cutter

New

The tool is capable of cutting large-diameter electric wires

Li-ion Ah 6.0 5.0 3.0 1.5

Max blade opening width	105 mm (4-1/8")
Max cable cutting capacity	Polyethylene power cable: $\varnothing 72$ mm (4×325 mm ²), PVC insulated multi-core cable: $\varnothing 77$ mm (3×325 mm ²), Annealed copper wire: $\varnothing 105$ mm (1,300 mm ²), Hard-drawn copper wire: $\varnothing 90$ mm (1,300 mm ²), Aluminum wire: $\varnothing 105$ mm (1,300 mm ²)
Dimensions (L x W x H)	w/ BL1860B: 718 x 123 x 267 mm (28-1/4 x 4-7/8 x 10-1/2")
Net weight	10.2 - 10.5 kg (22.5 - 23.1 lbs.)



18V



LXT

Z: Battery and Charger are sold separately

DTC301

Cordless Crimper



- With a maximum crimping capacity of $\varnothing 19.5$ mm (300 mm²), this tool is capable of crimping terminals onto large-diameter electric wires
- Crimping capacity: Cu: $\varnothing 19.5$ mm (300 mm²), Al: $\varnothing 19.5$ mm (300 mm²)
- Auto retract function, Single LED job light with afterglow function
- Trigger-lock function to minimize accidental pulling of the switch trigger



DTC301ZK Cordless Crimper

New

Capable of crimping terminals onto large-diameter electric wires

Li-ion Ah 6.0 5.0 3.0 1.5

Output force	120 kN
Ram stroke length	31 mm (1-1/4")
Crimping capacity	Cu: $\varnothing 19.5$ mm (300 mm ²) Al: $\varnothing 19.5$ mm (300 mm ²)
Dimensions (L x W x H)	W / BL1860B: 415 x 92 x 346 mm (16-3/8 x 3-5/8 x 13-5/8")
Net weight	6.8 - 7.1 kg (15.0 - 15.7 lbs.)



18V



LXT

Z: Battery and Charger are sold separately

DHW180

Cordless Pressure Washer

Regular pressure

2.4 MPa

In High mode, when
connected to water supply

- Providing sufficient cleaning power for light-duty washing tasks on work sites and for home use
- Selectable from two power modes
- 5-in-1 nozzle allows for easy mode changes by rotating the nozzle head
- Self priming function
- Water-resistance compatible with XPT
- Battery capacity warning function



DHW180Z01 Cordless Pressure Washer

New

18V LXT Cordless 2.4 MPa Pressure Washer

Li-ion Ah 6.0 5.0 3.0 1.5

Regular pressure	Self-priming, High / Low: 2.0 / 0.8 Mpa Connection to water supply, High / Low: 2.4 / 0.8 Mpa
Regular flow rate	Self-priming, High / Low: 2.5 / 1.5 L/min Connection to water supply, High / Low: 2.5 / 1.5 L/min
Max Flow Rate	w/o Nozzle: 5.3 L/min
Continuous use	High, Low: 18, 50min.
Max suction height	2.0 m (6.7 ft)
Supplied hose length	6 m (19.7 ft)
Dimensions (L x W x H)	419 x 99 x 239 mm (16-1/2 x 3-7/8 x 9-3/8")
Net weight	2.3 - 2.7 kg (5.1 - 6.0 lbs.)



18V **2** LXT XPT

Hose, Absorption connector, Nozzle, Extension, Cleaner pin, Battery, Charger, Z: Battery and Charger are sold separately

DJV186

Cordless Jig Saw



- Top Handle Jig Saw, 3 Orbital Settings plus Straight Cutting
- 3 orbital settings plus straight cutting deliver faster and more accurate cuts
- Variable speed control
- Compact and lightweight
- Electric brake
- Blower function



Optional
accessories
Support base set

DJV186RT1J / Z Cordless Jig Saw

New

18V LXT Cordless Top Handle Jig Saw, 3 Orbital Settings plus Straight Cutting

Li-ion Ah 6.0 5.0 3.0 1.5

Capacity	Wood: 65 mm (2-9/16") Mild steel: 6 mm (1/4") Aluminum: 10 mm (3/8")
Bevel range	0 - 45°
Length of Stroke	18 mm (11/16")
Strokes Per Minute (SPM)	0 - 2,900 min ⁻¹
Dimensions (L x W x H)	257 x 81 x 196 mm (10-1/8 x 3-3/16 x 7-3/4")
Net weight	1.9 - 2.2 kg (4.2 - 4.9 lbs.)



18V **2** LXT

Jig saw blade, Hex wrench, Battery, Charger, Blade, Z: Battery and Charger are sold separately

BCC01 / BCC02

Battery Charging Case

- Designed to be connected to MAKPAC carriers
- Can be carried to the site by the MAKPAC trolley or cart
- Switch charging of batteries attached to multiple ports
- LXT batteries can be charged using an interchangeable adapter the ADP10 (BCC01 only)
- Hole for padlock
- Rotatable twin handles
- Charging status indicator
- Removable lid and vertical or horizontal case placing



BCC01: 8 ports



MAKPAC type Battery Charging Case with multiple charging ports for LXT batteries

BCC02: 12 ports



MAKPAC type Battery Charging Case with multiple charging ports for XGT batteries



1914X3-8

Dust Extraction Pad Set

- Wall suction dust extraction shroud for all Makita rotary and combination hammers
- Facilitates efficient dust extraction for cleaner and healthier working environments
- Suction control lever allows easy adjustment of suction force and change of working position
- Bit diameter with shroud on: Up to 30mm
- Bit diameter with shroud off: Up to 52mm
- Vacuum connection: 38mm and 24mm outer cuff diameter
- Includes 2x shroud replacements



1914L7-6 / 1914L9-2

Dust Cup Set for HR2670

- Dust collection attachment to be attached to the tip of the tool and used in conjunction with a vacuum cleaner
- Items can be a dust collection attachment in which can be attached to the tip of the tool and used in conjunction with a vacuum cleaner of cuff size 22



1914L7-6 for drilling work



1914L9-2 for chiseling work





**COMING
SOON**

Visit us at:
www.makita.com.sg



MakitaSG