



Cordless Die Grinder GD001G / GD002G



40V^{Li-ion}max



GD001G
Slide-switch

High power for high-efficiency grinding

Powerful grinding for fine tasks



GD002G
Paddle switch

**Work efficiency
Increased by approx. 40%**

*Compared to our 18V model



GD001G
Slide-switch



GD002G
Paddle switch




Slim grip
146 mm circumference



3 LEDs
Enhances visibility in tight spaces




Shaft lock
The spindle can be locked with the button for accessory removal/installation.



AFT

Active Feedback sensing Technology

Shuts down the tool, if the rotation speed suddenly slows down.

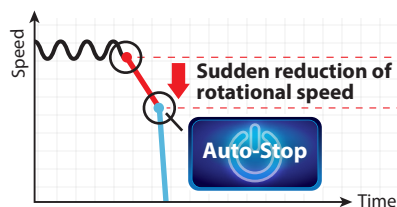

Speed adjustment dial
enables adjustment of the rotation speed to suit the application

Dial	No load speed (min ⁻¹)	Application
1	7,000	Polishing and finishing
2	12,500	Paint removal
3	18,000	Rust removal
4	23,500	Burr removal
5	29,000	Grinding

Charging Time

	Fast Charging DC40RA	DC40RC
*1 BL4020 2.0Ah 191L29-0	22 min	30 min
*1 BL4025 2.5Ah 191B36-3	28 min	38 min
*1 BL4040/F 4.0Ah 1910N6-8	45 min	67 min
*1 BL4050F 5.0Ah 191L47-8	50 min	85 min
BL4080F/H 8.0Ah F: 191X65-8 H: 1916T7-4	76 min	170 min

*1 Recommended battery

Cordless Die Grinder

GD001G / GD002G

Brake	No load speed	7,000 - 29,000 min ⁻¹
Anti-restart function	Circumference of grip portion	146 mm (5-3/4")
Constant Speed	GD001G: 5.4 m/s ² Surface grinding (artificial wheel 25-50 mm)	
Soft Start	GD001G: 15.2 m/s ² Surface grinding (artificial wheel 50 mm over)	
Built-in Job Light	GD002G: 5.7 m/s ² Surface grinding (artificial wheel 25-50 mm)	
	GD002G: 14.6 m/s ² Surface grinding (artificial wheel 50 mm over)	
	Uncertainty (K) : for Vibration ¹	1.5 m/s ²
	Sound pressure level ¹	78 dB(A) No load (artificial wheel 25-50 mm)
		80 dB(A) No load (artificial wheel 50 mm over)
	Uncertainty (K) for Noise ¹	91 dB(A) No load (artificial wheel 50 mm over)
	Dimensions (L x W x H)	452 x 85 x 119 mm (17-3/4 x 3-3/8 x 4-11/16")
	(Battery)	BL4025/BL4020
	Net weight	2.2 - 3.4 kg (4.9 - 7.5 lbs.)
	(Battery)	BL4020 - BL4080F

Standard Equipment : Wrench, Collet cone, Battery, Charger

*EN60745-2-23

The net weight value includes the lightest and heaviest combination of the attachment(s) and battery cartridge(s) which are specified in the instruction manual.
Items of standard equipment and specifications may vary by country or area.

Makita Singapore Pte Ltd

7, Changi South Street 3, Singapore 486348
Phone : +65-6546-8700 Fax : +65-6546-8711
Email : msgproductteam@makita.com.sg
Website : www.makita.com.sg
Facebook : www.facebook.com/MakitaSG



MakitaSG



VISIT OUR WEBSITE



DOWNLOAD LEAFLET

PRINTED IN SINGAPORE