

40Vmax Chain Saw series

Equivalent to 42cc-class chain saws

UC012G (Motor unit only)
(Captive nuts type)



Equivalent to 35cc-class chain saws

UC022G
(Tool-less chain adjustment type)



UC014G/ UC015G
(Tool-less chain adjustment type)



photo: UC014G

Accessories

File set in roll-up pouch

Ø4.8mm Round File
(3pcs) / File Holder /
Flat File / Handle
(2pcs) / Depth Gauge



Part No.

D-72176

Chain oil

Size	Part No.
100ml	199897-3
1L	1910U0-9



Guide Bar / Saw Chain / Guide Bar Cover / Drive sprocket

Guide Bar					Saw Chain					Drive sprocket	
Bar length	Motor Mount	Type	Part No.	No. of drive links	Gauge	Pitch	Type OREGON	Cutter type	Part No. (Carton)	Type	Part No.
40cm/16"	D025	Sprocket nose bar	1915Y7-3	67	1.3mm/ 0.050"	0.325"	95TXL	Micro chisel	1916A1-3	Sprocket 0.325"	1916A5-5
45cm/18"			1915Y8-1	74					1916A2-1		
50cm/20"			1915Y9-9	82					1916A3-9		
50cm/20"	D025	Sprocket nose bar	1916A0-5	82	1.6mm/ 0.063"	0.325"	22BPX	Micro chisel	1916A4-7		

Charging Time

	Fast Charging DC40RA	DC40RC
BL4040/F 4.0Ah 1910N6-8	45 min	67 min
BL4050/F 5.0Ah 191L47-8	50 min	85 min
BL4080/F 8.0Ah 191X65-8	76 min	170 min
*BL4080/H 8.0Ah 1916T7-4	76 min	170 min

*1 Recommended battery

Cordless Chain Saw UC030G	
Variable Speed	Chain type [gauge] 95TXL / 22BPX [1.3 / 1.6 mm (0.05 / 0.063")]
Brake	Guide bar length 400, 450, 500 / 500 mm (16, 18, 20 / 20")
Anti-restart function	Chain speed (at no load) 0 - 20.0, 24.5, 29.0 m/s
Electronic 3-Speed	Chain oil tank volume 260 mL (8.8 US oz)
Constant Speed	Vibration level *1 4.1 m/s ²
Automatic Oiling	Uncertainty (K) for Vibration*1 1.5 m/s ²
Chain Brake	Sound pressure level *2 95 dB (A)
	Sound power level*2 103 dB (A)
	Uncertainty (K) for Noise*2 3 dB (A)
	Dimensions (L x W x H) 449 x 232 x 280 mm (17-3/4 x 9-1/8 x 11")
	Net weight w/o Guide bar, Saw chain 6.6 - 7.8 kg (14.6 - 17.2 lbs.)
	Battery/ Attachment BL4040F - BL4080F/ Guide bar, 95TXL saw chain, Chain oil

*1 EN62841-4-1, Mode: Cutting wood, 95TXL saw chain, 500 mm sprocket nose guide bar

*2 EN62841-4-1, 95TXL saw chain, 500 mm sprocket nose guide bar

Standard Equipment :
Guide bar, Saw chain, Guide bar case, Wrench,
Chain oil, Round file, Battery, Charger

The weight may differ depending on the attachment(s), including the battery cartridge.
Items of standard equipment and specifications may vary by country or area.

Makita Singapore Pte Ltd

7, Changi South Street 3, Singapore 486348
Phone : +65-6546-8700 Fax : +65-6546-8711
Email : msgproductteam@makita.com.sg
Website : www.makita.com.sg
Facebook : www.facebook.com/MakitaSG



MakitaSG



VISIT OUR WEBSITE



DOWNLOAD LEAFLET

PRINTED IN SINGAPORE



Cordless Chain Saw
UC030G



Efficiency equal to or greater than
that of 50cc-class chain saws




Max. chain speed

29.0 m/s

High speed cutting

8.7 sec.

ø400mm cedar log
Battery : BL4080H
Guide bar/ Saw chain: 500mm/ 95TXL




Excellent work efficiency with the high-output BL4080H battery and brushless motor



Recommended battery:
High-output BL4080H
for excellent performance

Li-ion **8.0 Ah**

BL
MOTOR

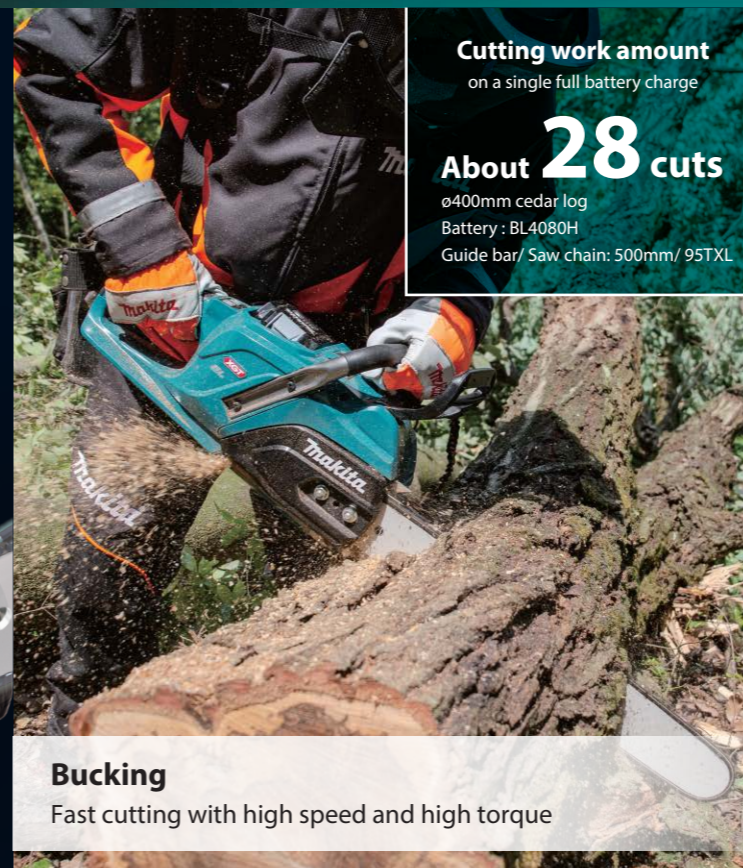

Cutting work amount
on a single full battery charge

About **28** cuts

ø400mm cedar log
Battery : BL4080H
Guide bar / Saw chain: 500mm / 95TXL



Highly visible felling line



Bucking

Fast cutting with high speed and high torque

Felling


Optimal handle design for precise tree felling

High-output BL4080H battery

Featuring tabless cells, this battery delivers approximately 35% higher output than the BL4080F. This battery maximizes the tool's performance and enables continuous high-load operation that exceeds the performance of the BL4080F.


A feeling of tenacity in use

When the user presses the tool against the material with excessive force, they can feel a decrease in rotation speed, making it easy to adjust the load on the cutting edge.

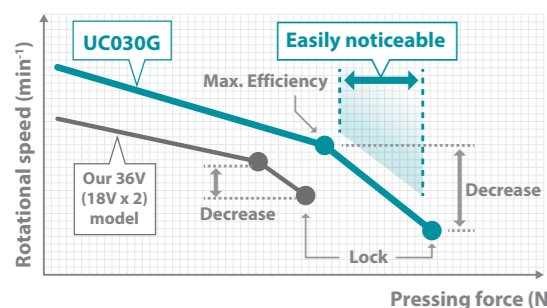

Excellent acceleration


To enable efficient continuous and repetitive cutting tasks such as limbing, the response to trigger operation has been enhanced to provide acceleration.

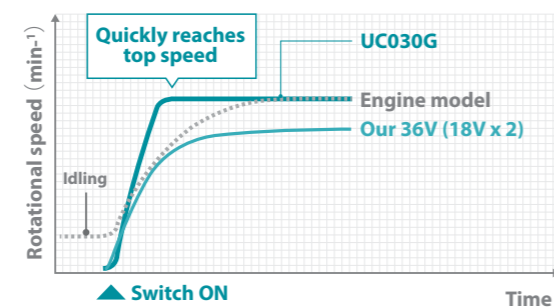

Control interface with excellent visibility and operability/ Chain speed: 3 modes


Display section

With six types of icons and high-brightness LEDs, tool's status can be easily checked.

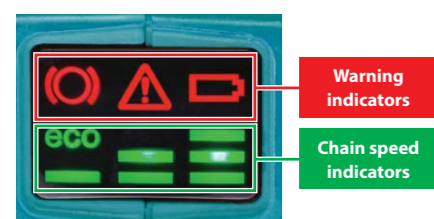


Control section

The buttons have been redesigned to provide tactile feedback, enhancing usability.

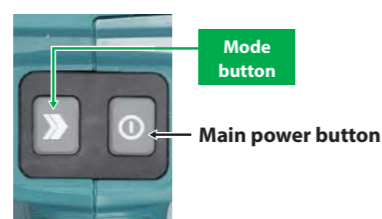

Auto power-off time: 5 min.

Operability has been improved by redesigning the lock-off lever structure and setting the auto power-off time to 5 minutes.

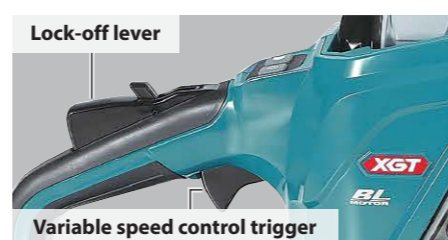


Excellent restartability (when locked)

If the tool locks due to load, removing the load immediately allows the motor to start again without retriggering, making it possible to resume cutting operations.



Equipped with an air filter

The dust cover can be removed and attached without tools, making it easy to clean or replace the air filter.

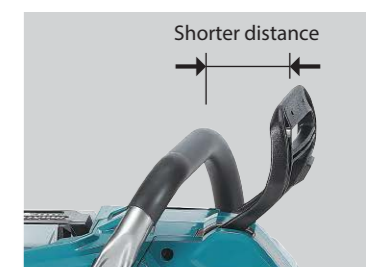

Easily operable front hand guard

The shorter distance between the front handle and front hand guard makes it easier to release the brake.



Guide bar length (saw chain type)

- 500mm (95TXL, 22BPX)
- 450 / 400mm (95TXL)



Metal spike bumper



Captive nuts to prevent nut loss



Chain tensioning screw



Metal chain catcher screw



Water and dust resistant *1
Designed for use in rainy conditions

*1 This tool is designed to withstand operation in rainy conditions as specified by our internal standards.
This tool is not guaranteed to be free from malfunction due to water or dust.



The tool is IPX4M-rated for use in rainy conditions.

*2 The IPX4M rating applies only when:
• The tool is marked with both the IPX4M mark and the use-in-rain symbol.
• The battery is marked with either the use-in-rain symbol, the "Gen.2" mark, or both.

