



Cordless Flat-head Angle Grinder
GA056G 125 mm (5")



40V^{Li-ION}
max

Efficient grinding in tight spaces



Tip access angle

39°

* with 4 mm thick offset wheel




BL MOTOR AFT XPT



**BL
MOTOR**

AFT Active Feedback sensing Technology

Shuts down the tool, if the rotation speed suddenly slows down.

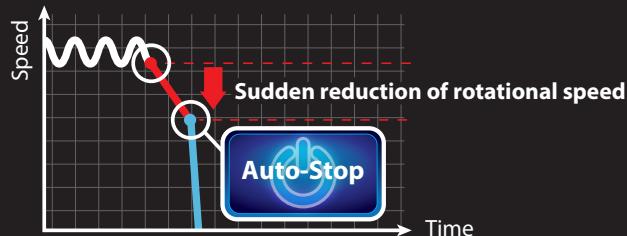

Electric brake

Stops the wheel immediately when the switch is released.



Anti-restart function

Prevents accidental start-up when the battery is installed while the switch is on.




Speed adjustment dial

Allows stepless speed control from 1 to 5 to suit the application.



XPT eXtreme Protection Technology

High water-resistance compatible with XPT

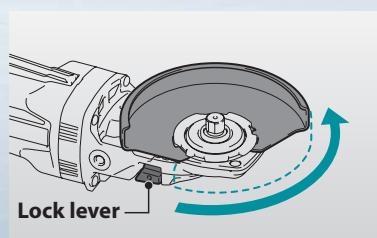

Toolless wheel cover

Tool-less installation and removal, with angle adjustment using the lock lever.

Charging Time

	Fast Charging	DC40RA	DC40RC
BL4020 2.0Ah 191L29-0	22 min	30 min	
*1BL4025 2.5Ah 191B36-3	28 min	38 min	
*1BL4040/F 4.0Ah 191ON6-8	45 min	67 min	Part No. 194514-0 Anti-vibration side grip for lower vibration
*1BL4050F 5.0Ah 191L47-8	50 min	85 min	
BL4080F/H 8.0Ah F: 191X65-8 H: 1916T7-4	76 min	170 min	

*1 Recommended battery

Accessories

Side grip

Part No. 1910X6-8
For added comfort and control



Part No. 194514-0
Anti-vibration side grip for lower vibration



Cordless Flat-head Angle Grinder

GA056G

	Variable Speed	Wheel diameter Minimum access angle	125 mm (5") 39°
	Brake	No load speed	3,000 - 9,000 min ⁻¹
	Anti-restart function	Cutting depth	30 mm (1-3/16")
		Vibration level*	5.1 m/s ² 6.3 m/s ² 2.5m/s ² or less
	Soft Start	Uncertainty (K) for Vibration†	1.5m/s ² 84 dB(A)
		Sound pressure level*	92 dB(A)
		Sound power level*	3 dB(A)
		Uncertainty (K) for Noise*	483 x 140 x 136 mm (19 x 5-1/2 x 5-3/8")
		Dimensions (L x W x H)	BL4040F
		(Battery)	Net weight (Battery)
			3.1 - 4.4 kg (6.8 - 9.7 lbs.) BL4020 - BL4080F

Standard Equipment: Side grip, Adapter, Lock nut wrench, Wheel cover for cut-off wheel, Battery, Charger

Items of standard equipment and specifications may vary by country or area.

Makita Singapore Pte Ltd

7, Changi South Street 3, Singapore 486348
Phone : +65-6546-8700 Fax : +65-6546-8711
Email : msgproductteam@makita.com.sg
Website : www.makita.com.sg
Facebook : www.facebook.com/MakitaSG



MakitaSG

VISIT OUR WEBSITE



DOWNLOAD LEAFLET

PRINTED IN SINGAPORE