

## Accessories

### Glass protection nozzle

Part No. PR00000028

Ideal for drying putty while protecting glass, and protecting windows when stripping frames



### Overlap welding nozzle

Part No. PR00000032

For patching a vinyl sheet with the optional pressure roller



### Speed welding nozzle

Part No. PR00000039

Conveniently holds a plastic welding rod while speed welding (welding rod not included)



### Welding rods

Part No. ABS: PR00000036  
HDPE: PR00000037  
PP: PR00000038

### Wide-slot nozzle

Part No. PR00000029

Ideal for applications such as PVC packing



### Solder sleeves reflector

Part No. PR00000033

Ideal for heating heat shrink tubing



### Reflector nozzle

Part No. PR00000030

Ideal for soldering and shrink fitting plastic soldering sleeves, and bending plastic welding rods



### Welding nozzle

Part No. PR00000034

Ideal for placing an accurate heat beam



### Reduction nozzle 20mm

Part No. PR00000031

Provides concentrated heating over a small area



### Pressure roller

Part No. PR00000035

Ideal for securing material while being heated



### Scraper

Part No. PR00000040

Ideal for stripping paint and varnish



### Scraper set

Part No. PR00000041

Ideal for stripping paint and varnish



## Cordless Heat Gun Series

### DHG181



Air volume  
**70/110 L/min**


Air temperature  
**Up to 550 °C**

### DHG180



Air volume  
**110 L/min**

Air temperature  
**Up to 550 °C**

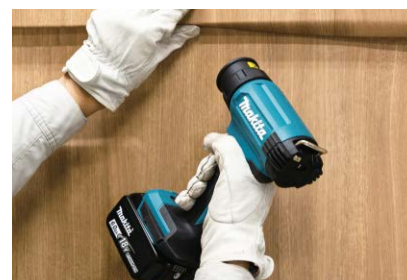

## Charging Time

	DC40RA	DC40RC
<b>BL4020</b> 2.0Ah 191L29-0	<b>22 min</b>	<b>30 min</b>
<b>*BL4025</b> 2.5Ah 191B36-3	<b>28 min</b>	<b>38 min</b>
<b>*BL4040/F</b> 4.0Ah 1910N6-8	<b>45 min</b>	<b>67 min</b>
<b>*BL4050F</b> 5.0Ah 191L47-8	<b>50 min</b>	<b>85 min</b>
<b>*BL4080F/H</b> 8.0Ah F: 191X65-8 H: 191677-4	<b>76 min</b>	<b>170 min</b>

\* Recommended battery

## Cordless Heat Gun

### HG001G

- Anti-restart function
- Electronic 4-Speed
- Constant Speed
- Built-in Job Light

Air temperature	Ambient temperature (blowing) - 600 °C (1,112.0 °F)
Air volume	120 / 150 / 180 / 200 L/min
Continuous use (Battery)	14 min.
(Other conditions)	600 °C, 200 L/min
Nozzle fitting diameter	34.5 mm
Dimensions (L x W x H), (Battery)	191 x 86 x 272 mm (7-1/2 x 3-3/8 x 10-3/4")
Net weight (Battery)	1.5 - 2.7 kg (3.3 - 6.0 lbs.)
	BL4020 - BL4080F

**Standard Equipment:** Reduction nozzle, Glass protection nozzle, Reflector nozzle, Wide slot nozzle, Battery, Charger

The net weight value includes the lightest and heaviest combination of the attachments and battery cartridges which are specified in the instruction manual.  
Items of standard equipment and specifications may vary by country or area.

## Makita Singapore Pte Ltd

7, Changi South Street 3, Singapore 486348  
Phone : +65-6546-8700 Fax : +65-6546-8711  
Email : msgproductteam@makita.com.sg  
Website : www.makita.com.sg  
Facebook : www.facebook.com/MakitaSG



MakitaSG



VISIT OUR WEBSITE



DOWNLOAD LEAFLET

PRINTED IN SINGAPORE

**Makita**

**Cordless Heat Gun  
HG001G**

**XGT**  
**40V<sup>Li-ion</sup>max**



Maximum air volume  
**200 L/min**

Maximum temperature  
**600 °C**

**For installing vehicle wrap films**



**For connecting hoses**







For applying adhesive vinyl sheets



For heating and shrinking heat-shrink tubing

## Delivers excellent efficiency for demanding tasks

Maximum  
temperature


**600°C**

\*Compared to our  
18V models


Maximum  
air volume

**200 L/min**

\*Compared to our  
18V models

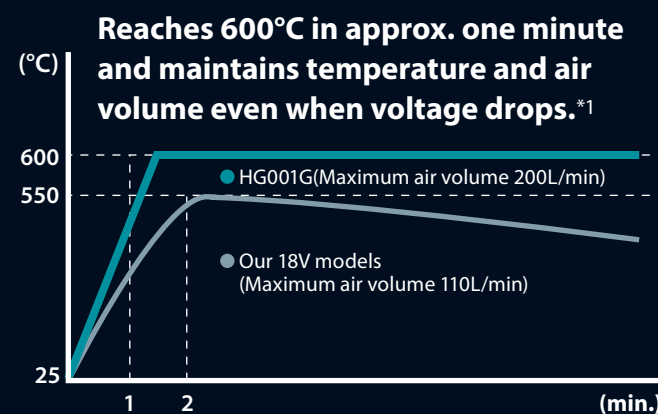

### LCD screen with backlight

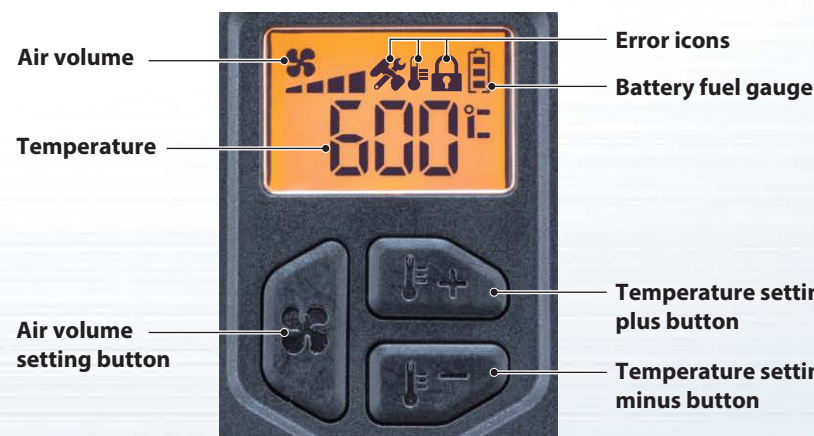

- Memory function: Remembers the last used temperature and air volume settings.
- Maximum temperature control function

### Temperature adjustment\*2

COOL mode (fan only) and heating range from 50°C to 600°C.



\*2 Actual temperature at the nozzle tip may vary depending on the working environment and usage conditions.

### Air volume adjustment

Switchable in four steps.

1	120L/min	2	150L/min
3	180L/min	4	200L/min

### Standard nozzles



**Wide-slot nozzle**  
Ideal for applications such as PVC packing.



**Glass protection nozzle**  
Ideal for drying putty while protecting glass, and protecting windows when stripping frames.



**Reflector nozzle**  
Ideal for soldering and shrink fitting plastic soldering sleeves, and bending plastic welding rods.



**Reduction nozzle 20mm**  
Provides concentrated heating over a small area.

### Nozzle quick release

The quick-release mechanism allows tool-free nozzle removal without touching hot metal parts.



### LCD display



Can be placed vertically

