

**VS001G**  
Cordless Vacuum Sweeper

1. Capable of cleaning dust or waste of all sizes
2. Dust container capacity 24L

Dust pickup rate  
about  
**90%**

Cleaning width  
with Side brush  
**650 mm**



**Makita** Cordless Blower  
**UB003G**

**Air volume comparable to  
28cc-class engine models**

**Accessories**

**Flat nozzle set**  
Part No. 1916V7-8



**Gutter nozzle set**  
Part No. 191B03-8



**Adapter pipe 80-72 set**  
Part No. 191L13-5



For connecting the gutter  
nozzle set

**Vacuum kit set**  
Part No. 1916T9-0



Capacity: 50 L

**Dust bag set**  
Part No. 191P40-6



Capacity: 25 L

**Charging Time**

	DC40RA	DC40RC
<b>BL4020</b> 2.0Ah 191L29-0	<b>22 min</b>	<b>30 min</b>
<b>*BL4025</b> 2.5Ah 191B36-3	<b>28 min</b>	<b>38 min</b>
<b>*BL4040/F</b> 4.0Ah 191O6-8	<b>45 min</b>	<b>67 min</b>
<b>*BL4050F</b> 5.0Ah 191L47-8	<b>50 min</b>	<b>85 min</b>
<b>BL4080F/H</b> 8.0Ah F: 191X65-8 H: 1916T7-4	<b>76 min</b>	<b>170 min</b>

\* Recommended battery

Cordless Blower	
UB003G	
Variable Speed	Blower function
Brake	Max blowing force: 7 / 16N
Anti-restart function	Max air volume: 9.4 / 13.8 m <sup>3</sup> /min (332 / 487 CFM)
Constant Speed	Max air velocity: 0 - 46 / 68 m/s (0 - 103 / 152 MPH)
	Avg. air velocity: 0 - 38 / 56 m/s (0 - 85 / 125 MPH)
	Continuous use: 30 / 9 min
	BL4050F
	Max air volume: 13.0 m <sup>3</sup> /min (459 CFM)
	Max sealed suction: 3.3 kPa
	Dust bag capacity: 50 L (13.2 gal)
	Continuous use: 30 / 9 min
	BL4050F
	Sound pressure level
	86.8dB(A) (EN IEC 62841-4-6)
	Sound power level
	97.3dB(A) (EN IEC 62841-4-6)
	Uncertainty (K) for Noise
	1.7 dB(A) (EN IEC 62841-4-6, Sound pressure level),
	1.8 dB(A) (EN IEC 62841-4-6, Sound power level)
	2.0m/s <sup>2</sup> (EN IEC 62841-4-6)
	Vibration level
	1.5m/s <sup>2</sup> (EN IEC 62841-4-6)
	Uncertainty (K) for Vibration
	Dimensions (L x W x H)
	699 - 830 x 201 x 400 mm (27-1/2 - 32-3/4 x 7-7/8 x 15-3/4")
	(Attachment)
	With the blower nozzle at shortest to longest, w/o the vacuum kit
	5.0 - 6.1 kg (11.0 - 13.4 lbs.)
	Net weight
	(Battery)
	BL4050F
	(Attachment)
	Min: with the blower pipe and nozzle, Max: with the vacuum kit

Standard Equipment: Flat nozzle, Vacuum kit, Band assembly, Hex wrench, Battery, Charger

The net weight value includes the lightest and heaviest combination of the attachment(s) for normal and safe use and battery cartridge(s) which are specified in the instruction manual. Items of standard equipment and specifications may vary by country or area.



Blowing	
Max air volume	Max air velocity
<b>13.8</b> m <sup>3</sup> /min	<b>68</b> m/s
	<b>56</b> m/s (Average)


Vacuuming	
Max air volume	Max sealed suction
<b>13.0</b> m <sup>3</sup> /min	<b>3.3</b> kPa





Delivers blower and vacuum air volume comparable to 28cc-class engine models, with tool-less switching between blower and vacuum modes

Insert. Rotate. Lock with one touch.


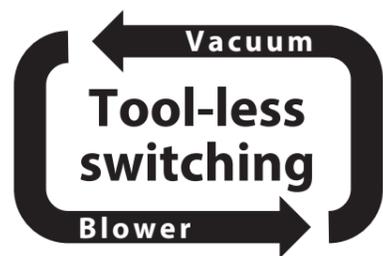


High water-resistance compatible with XPT

eXtreme Protection Technology **XPT**

Continuous run time on a full battery charge

	With BL4080F battery	With BL4050F battery
Low mode	About <b>45 min</b>	About <b>30 min</b>
High mode	About <b>15 min</b>	About <b>9 min</b>

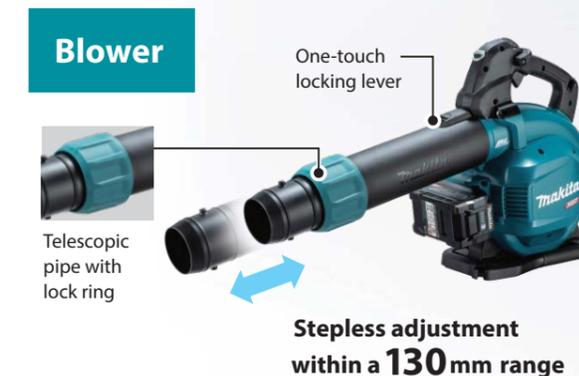

Air volume is adjustable from gentle to strong.

